

## 3-conductor ground terminal block; suitable for Ex e II applications

Item No.: 2004-1307



3-conductor ground terminal block; suitable for Ex e II applications

### Marking

RoHS ✓  
Compliant

### Business data

Supplier	WAGO
Item no.	2004-1307
GTIN / EAN	4017332071604
Content	1
Order amount	50
Customer item number	

### Notes



### Technical data


#### Miscellaneous

Total number of connection points	3
Total number of potentials	1
Color	green-yellow
Connection technology (1)	Push-in CAGE CLAMP®
Nominal cross section 1	4 mm <sup>2</sup>
Solid sizes 1	0.5 ... 6 mm <sup>2</sup> / 20 ... 10 AWG
solid, directly pluggable 1	1 ... 6 mm <sup>2</sup> / 14 ... 10 AWG
Fine-stranded wires 1	0.5 ... 6 mm <sup>2</sup> / 20 ... 10 AWG
min. fine-stranded with insulated ferrule, push-in terminati	0.75 mm <sup>2</sup> / 18 AWG
Strip length 1	11 ... 13 mm / 0.43 ... 0.51 in

<b>Technical data</b>	
<i>Type of wiring</i>	<i>Front-entry wiring</i>
<i>Design</i>	<i>horizontal</i>
<i>Marking level</i>	<i>Center/Side marking</i>
<i>Insulating material</i>	<i>Polyamide 66 (PA 66)</i>
<i>Fire load [MJ]</i>	<i>0.15 [MJ]</i>
<i>Weight [g]</i>	<i>14.58 [g]</i>
<i>Width</i>	<i>6.2 mm / 0.244 in</i>
<i>Height from upper-edge of DIN-rail [mm]</i>	<i>32.9 [mm]</i>
<i>Height from upper-edge of DIN-rail</i>	<i>32.9 mm / 1.295 in</i>
<i>Length</i>	<i>65.5 mm / 2.579 in</i>
<i>Type of mounting</i>	<i>DIN 35 rail</i>

Images & drawings

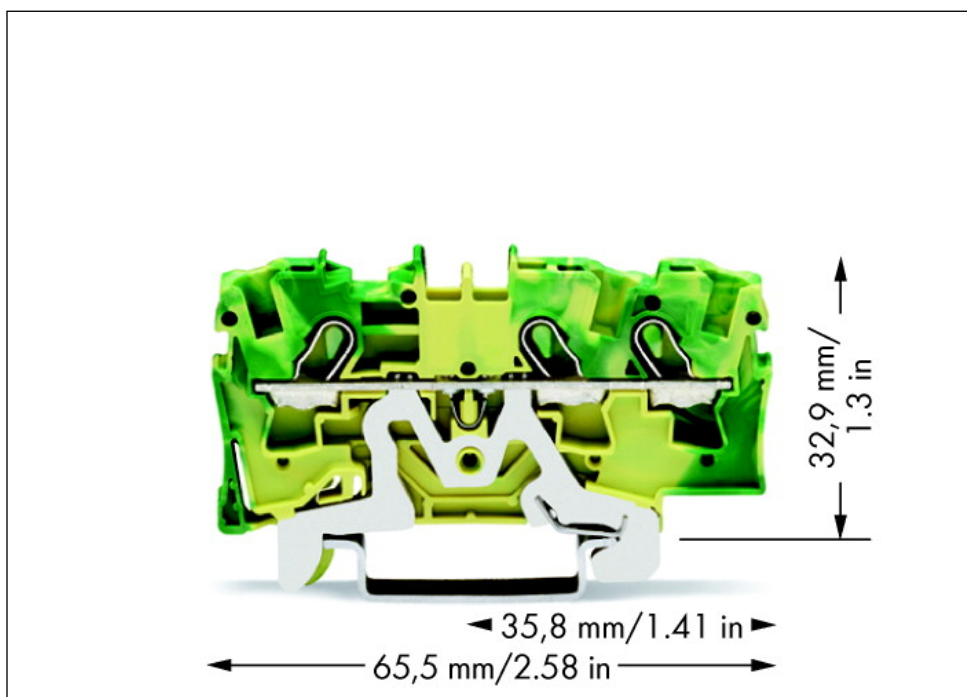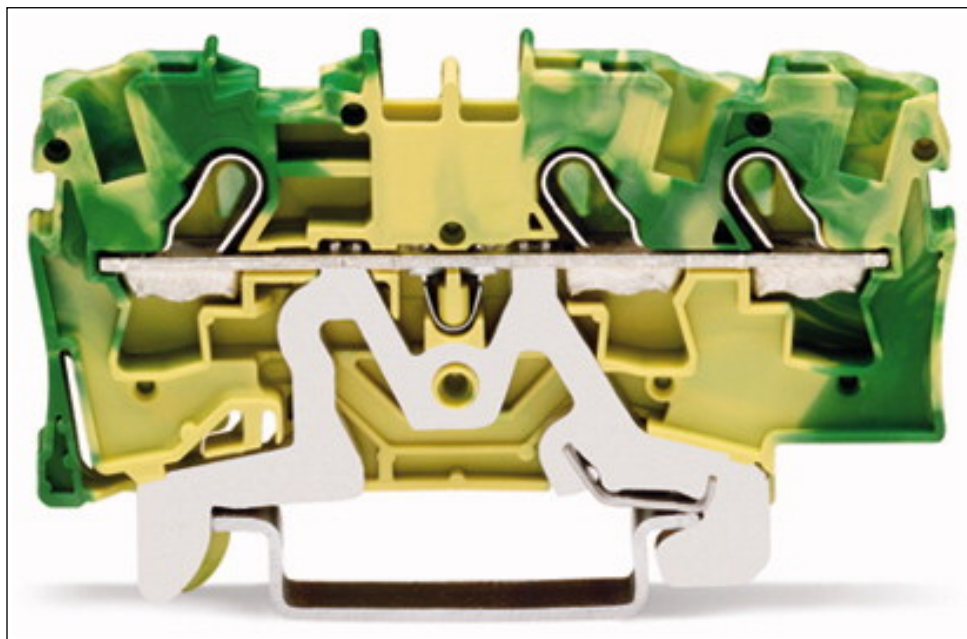

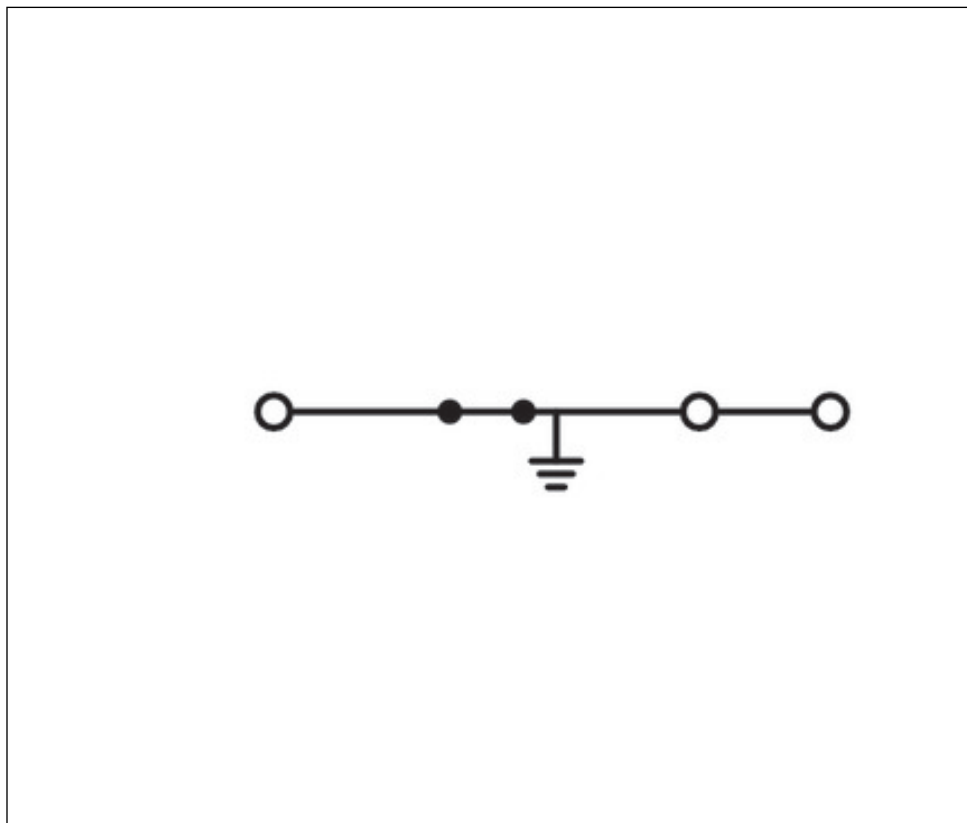

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [wago manufacturer](#):*

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000\\_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#)