

Printview: 2-conductor terminal strip; with snap-in mounting feet; for plate thickness 0.6 ... 1.2 mm; fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail; 4-pole - Item No.: 262-154

**WAGO**® online catalog / eShop

**2-conductor terminal strip; with snap-in mounting feet; for plate thickness 0.6 ... 1.2 mm; fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail; 4-pole**

Item No.: 262-154



2-conductor terminal strip; with snap-in mounting feet; for plate thickness 0.6 ... 1.2 mm; fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail; 4-pole

## Marking

RoHS ✓  
Compliant

## Business data

Supplier	WAGO
Item no.	262-154
GTIN / EAN	4044918642330
Content	1
Order amount	100
Customer item number	

## Notes

## Technical data

### Miscellaneous



No. of poles	4
Total number of connection points	8
Total number of potentials	4
Color	gray
Pollution degree (1)	3
Rated voltage EN (1) [V]	630 [V]
Rated surge voltage (1) [kV]	8 [kV]

Printview: 2-conductor terminal strip; with snap-in mounting feet; for plate thickness 0.6 ... 1.2 mm; fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail; 4-pole - Item No.: 262-154

<b>Technical data</b>	
<i>Nominal current [A]</i>	<i>24 [A]</i>
<i>Connection technology (1)</i>	<i>CAGE CLAMP®</i>
<i>Solid sizes 1</i>	<i>0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Fine-stranded wires 1</i>	<i>0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Strip length 1</i>	<i>9 ... 10 mm / 0.35 ... 0.39 in</i>
<i>Type of wiring</i>	<i>Side-entry wiring</i>
<i>Design</i>	<i>horizontal</i>
<i>Marking level</i>	<i>Side marking</i>
<i>Fire load [MJ]</i>	<i>0.344 [MJ]</i>
<i>Weight [g]</i>	<i>18.54 [g]</i>
<i>Width</i>	<i>32.4 mm / 1.276 in</i>
<i>Height from the surface</i>	<i>23 mm / 0.906 in</i>
<i>Length</i>	<i>33.5 mm / 1.319 in</i>
<i>Module width [mm]</i>	<i>7 [mm]</i>
<i>Module width [inch] [inch]</i>	<i>0.276 [inch]</i>

Printview: 2-conductor terminal strip; with snap-in mounting feet; for plate thickness 0.6 ... 1.2 mm; fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail; 4-pole - Item No.: 262-154

## Images & drawings

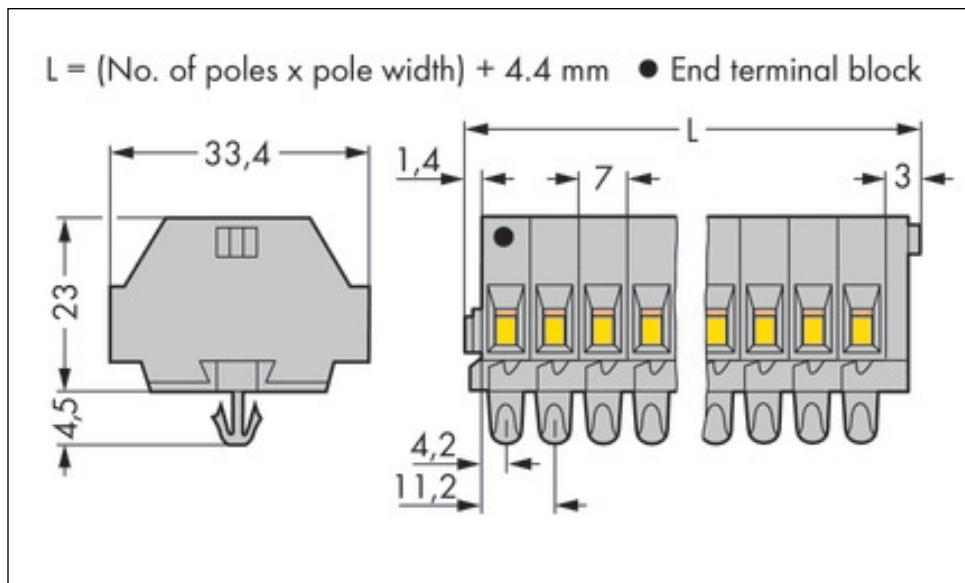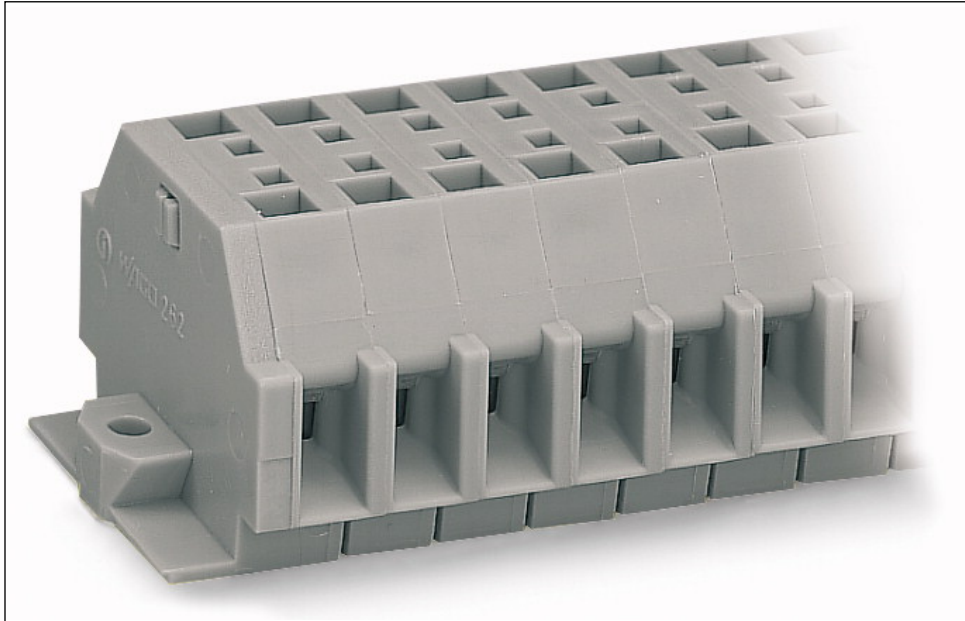

Printview: 2-conductor terminal strip; with snap-in mounting feet; for plate thickness 0.6 ... 1.2 mm; fixing hole 3.5 mm Ø; also fits 210-154 aluminum rail or with 209-123 mounting carrier for DIN 35 rail; 4-pole -  
Item No.: 262-154

---

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [wago](#) manufacturer:*

Other Similar products are found below :

[750-460](#) [231-118/026-000](#) [231-303/026-000](#) [231-620/019-000](#) [257-403](#) [280-438](#) [280-831](#) [284-624](#) [210-111](#) [231-303/037-000](#) [231-446/001-000\\_NR](#) [232-216/026-000](#) [234-510](#) [264-726](#) [280-339](#) [0283-0671](#) [830-800/000-305](#) [750-512](#) [750-455](#) [51251782](#) [286-312](#) [713-1428/107-000](#) [731-138/048-000](#) [750-459](#) [750-517](#) [750-602](#) [793-3505](#) [826-172](#) [859-304](#) [280-335](#) [231-535/001-000](#) [2604-1105](#) [2604-1106](#) [2604-1504](#) [2606-1103/020-000](#) [2624-1103](#) [2626-3103/020-000](#) [821-104](#) [713-1107](#) [852-1411](#) [2106-1307](#) [2116-5307](#) [832-1205](#) [832-3604](#) [2009-110](#) [281-512/281-501](#) [286-336](#) [750-421](#) [750-838](#) [753-559](#)