




221 Series for Hazardous Locations The Way to Connect!



WAGO 221 SERIES FOR HAZARDOUS LOCATIONS


New Possibilities for Manufacturers of Junction Boxes, Luminaires and Electronic Devices for Ex Areas

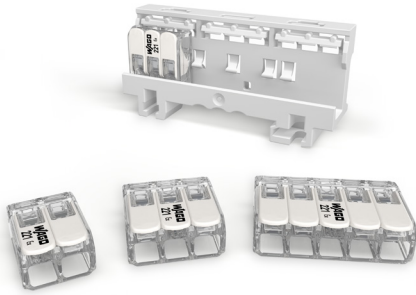


- Easy, fast and reliable connection technology for your products in Ex areas
- Only permitted in conjunction with the mounting carrier
- Mounting carrier can be DIN-rail mounted or can be screwed down to a smooth surface
- Approvals:




- ATEX: Ex II 2 G Ex eb IIC Gb / Zone 1, 2
- IECEx: Ex eb IIC Gb / Class 1, Zone 1
- American Ex: AEx eb IIC / Class 1, Zone 1
- Operating Temperature: Max. +105 °C

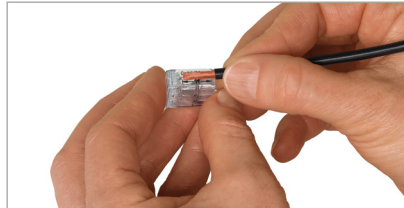


Strip conductor to 11 mm.

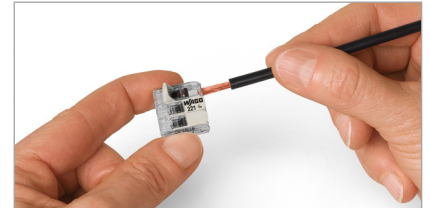


Easily open the lever by hand and insert a conductor.

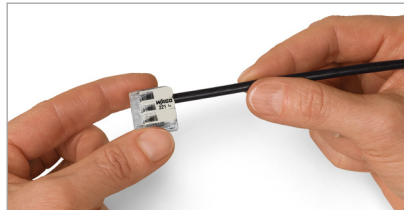


Push lever back down.

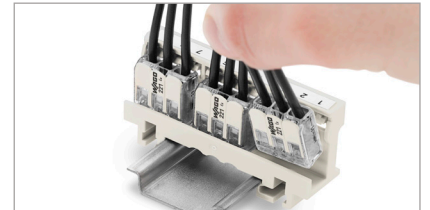


Easily install a connector into the mounting carrier.

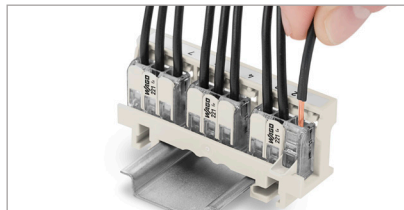


Simply connect and re-wire inserted connectors in the carrier.

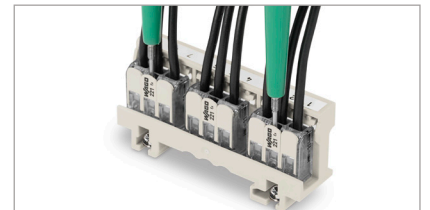


Easily test inserted connectors in the carrier.

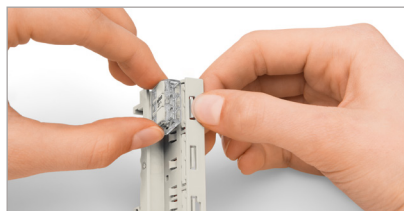


Easily remove the connectors – without tools.

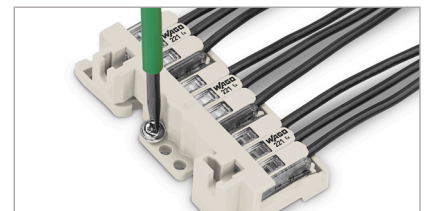

Secure the carrier using screws on smooth surfaces.

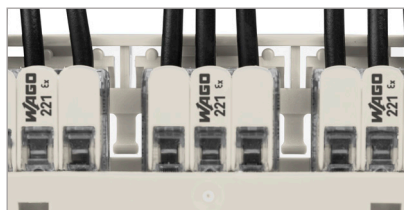

Rated 440 V with spacing between the adjacent connectors.

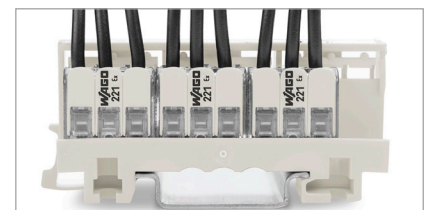

Rated 275 V with no spacing.

Ex Variant			
24 - 12 AWG	Fine Stranded Solid Stranded	440V/275V 600V* 20A	
Description	Item No.	Pack.	Unit
2-wire connectors	221-482	100	
3-wire connectors	221-483	50	
5-wire connectors	221-485	25	
Carrier			
Description	Item No.	Pack.	Unit
Mounting carrier; for 2-, 3- and 5-wire connectors; 24 - 12 AWG	221-501	50	

* cURus rated for general industry application

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [Wago](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#) [25.320.4053.1](#)
[25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-](#)
[5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [1719561](#)