

**Push-in type wire jumper; insulated; wire length 110 mm;  
conductor cross section 0.75 mm<sup>2</sup>**

Item No.: 249-126



Push-in type wire jumper; insulated; wire length 110 mm; conductor cross section 0.75 mm<sup>2</sup>

**Marking**

RoHS ✓  
Compliant

**Business data**

Supplier	WAGO
Item no.	249-126
GTIN / EAN	4044918786416
Content	1
Order amount	10
Customer item number	



**Notes**

**Technical data**

*Miscellaneous*

Pollution degree (1)	3
Rated voltage EN (1) [V]	800 [V]
Rated surge voltage (1) [kV]	8 [kV]
Nominal current [A]	9 [A]
Fire load [MJ]	0.023 [MJ]
Weight [g]	2.5 [g]
Wire length of wire jumpers [mm]	L = 110 [mm]
Safety information 1	Note: Push down the wire jumper until fully inserted!

Images & drawings

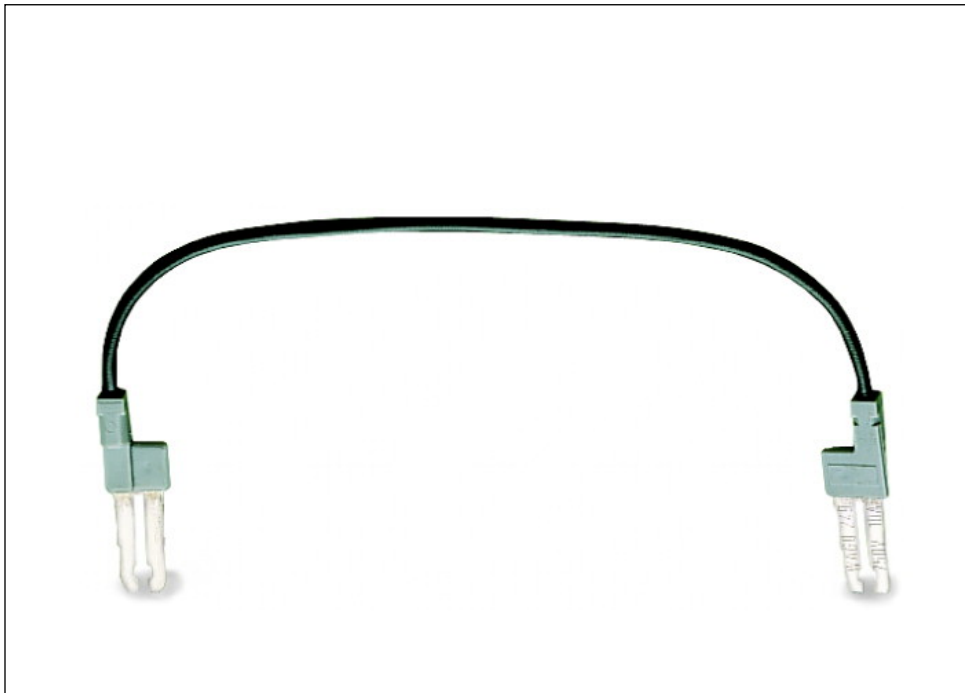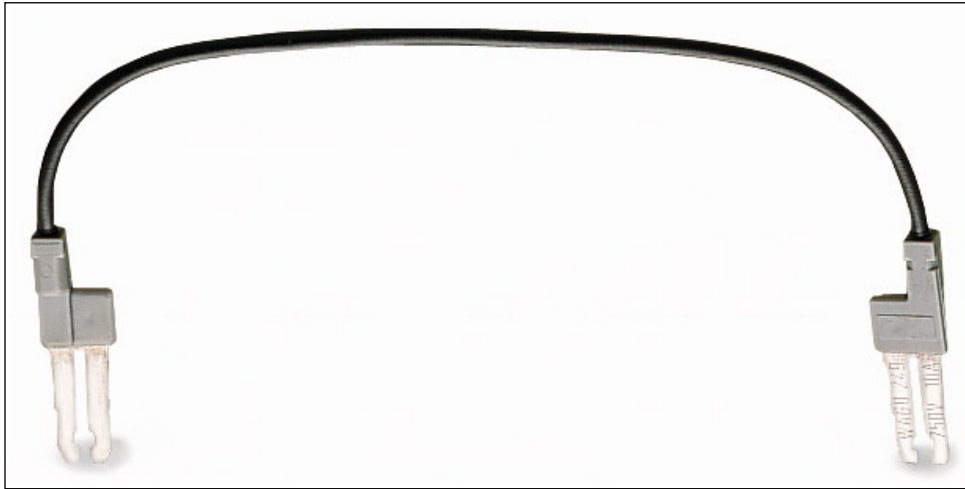

**Address**

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wago manufacturer](#):*

Other Similar products are found below :

[734-190](#) [750-460](#) [209-574](#) [231-118/026-000](#) [231-620/019-000](#) [250-209](#) [2734-108/037-000](#) [280-438](#) [285-135](#) [231-446/001-000\\_NR](#) [232-216/026-000](#) [264-726](#) [2010-1207](#) [2001-1207](#) [830-800/000-305](#) [811-421](#) [2006-1661](#) [750-960](#) [750-530](#) [210-197](#) [248-504](#) [731-138/048-000](#) [750-604](#) [773-108](#) [793-5666](#) [811-317](#) [811-411](#) [857-415](#) [255-406](#) [280-675](#) [285-407](#) [0745-0302](#) [2060-473/998-404](#) [830-1000/000-000](#) [2000-5372](#) [769-412](#) [221-525](#) [852-1417](#) [2636-3105/020-000](#) [2009-110](#) [231-332/108-000](#) [281-512/281-501](#) [750-421](#) [750-842](#) [769-615](#) [753-437](#) [2009-145](#) [852-1322](#) [852-1328](#) [852-1605](#)