

327-J

Jumper
Accessories




General Information

Pitch	14,5 mm
No. of poles	2 - 12
Usable with	all types of series 326, 327, 327-FU

Material

Moulding	PVC, red
Jumpers	Copper alloy, bare

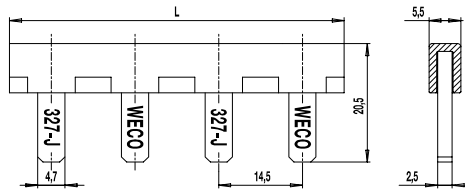

The jumper 327-J electrically bridges adjacent poles of series 326 and 327 terminals.
It is available in 14 mm pitch with 2 to 12 poles.
Just like the lead, it is connected to the clamping units.
The jumper shell is insulated.

Part Numbers

No. of poles	327-J	Length	PU
2	12.451.327	29,00	100
3	13.451.327	43,50	100
4	14.451.327	58,00	100
5	15.451.327	72,50	100
6	16.451.327	87,00	100
7	17.451.327	101,50	50
8	18.451.327	116,00	50
9	19.451.327	130,50	50
10	20.451.327	145,00	50
11	21.451.327	159,50	50
12	22.451.327	174,00	50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connector Accessories](#) category:

Click to view products by [Weco](#) manufacturer:

Other Similar products are found below :

[89674-0712](#) [FERRULE-174](#) [R141802000](#) [R141842000](#) [R141862000W](#) [R280907000](#) [RFI75-3](#) [AX102907](#) [HP-500](#) [2098-3251-94](#) [KA-81-02](#)
[KA-81-05](#) [KN-89-12](#) [89674-0805](#) [FERRULE-223](#) [202102-11](#) [R280468000](#) [R280510000](#) [RFI155-1](#) [RFI25-12-D3](#) [RFI25-4-D2](#) [RFI25-5](#)
[RFI75-12-D2](#) [RFI97-14](#) [360HS001M2508M6](#) [4-1532137-4](#) [HRM-514S\(40\)](#) [5-21085-0](#) [111062-0490](#) [112122-SOD-LUG](#) [IPP-2014](#) [RFI95-](#)
[14-D2](#) [MX-913/U\(45\)](#) [1736-1511-075](#) [000-78400](#) [RFI75-2-D3](#) [RFI25-3-D3](#) [R280469010](#) [RFI85-4](#) [896110450](#) [660-024M09S5-01](#) [1403137-](#)
[1](#) [360HB001M2512H](#) [360HS001M1716M3](#) [380HS115M2508H3](#) [380HS001M1716M4](#) [FERRULE-316DB](#) [105274-2000](#) [73415-1970](#)
[R280755050W](#)