

H4,0/22D ZH GR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



- supplied loose in poly-bag
- DIN colour code
- other colour code

General ordering data

Version	Wire-end ferrule, Twin wire-end ferrule, 15 mm, 12 mm, grey
Order No.	9037530000
Type	H4,0/22D ZH GR
GTIN (EAN)	4008 190493 103
Qty.	100 pc(s).
Packaging	loose

Creation date March 26, 2022 8:40:34 AM CET

Catalogue status 11.03.2022 / We reserve the right to make technical changes.

H4,0/22D ZH GR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 0.42 g

Technical data

Description of article Twin wire end ferrule, grey Version Twin wire-end ferrule

Wire-end ferrules

Collar height (A) 9 mm Collar width (B) 5.2 mm

Colour code DIN Conductor cross-section 4 mm²

Contact surface diameter (D1) 3.5 mm Contact surface length (L2) 12 mm

L1 in mm 22 mm Metal sleeve thickness (S1) 0.2 mm

Plastic collar thickness (S2) 0.5 mm Stripping length 15 mm

Wire connection cross section AWG, max. AWG 12

Classifications

ETIM 6.0 EC000005 ETIM 7.0 EC000005

ETIM 8.0 EC000005 ECLASS 9.0 27-40-02-01

ECLASS 9.1 27-40-02-01 ECLASS 10.0 27-40-02-01

ECLASS 11.0 27-40-02-01

Approvals

Approvals



ROHS Conform

UL File Number Search E499744

DownloadsEngineering Data [CAD data – STEP](#)Engineering Data [EPLAN, WSCAD, Zuken E3.S](#)User Documentation [Technical information - EN](#)[Technical information - DE](#)Catalogues [Catalogues in PDF-format](#)

Brochures

Data sheet


H4,0/22D ZH GR

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Drawing

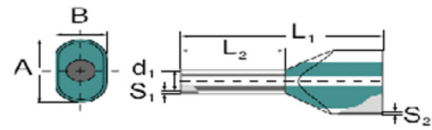

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [61-SN](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [63-S](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#) [M55155/29-5S](#)