


### **Dimensions: [mm]**





Scale - 1:1

### **Applicable Cable Diameter: [mm]**



### **Electrical Properties:**

Properties		Test conditions	Value	Unit	Tol.	
Impedance @ 25 MHz 1 turn	Z	25 MHz	25	Ω	±25%	
Impedance @ 100 MHz 1 turn	Z	100 MHz	66	Ω	±25%	

### **Certification:**

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]
Halogen Free	Conform [IEC 61249-2-21]

### **General Information:**

JaH

Operating Temperature	-25 up to +125 °C			
Storage Conditions (in original packaging)	< 40 °C; < 75 % RH			
Test conditions of Electrical Pro	operties: +20 °C, 33 % RH if not specified differently			





WüRTH




DATE (YYYY-MM-DD) GENERAL TOLERANCE 004.006 2022-01-03 DIN ISO 2768-1m


**WE-FLAT Flat Ferrite Core** 7427218 BUSINESS UNIT 1/6 Valid

### **General Properties:**

Properties		Value	Unit	Tol.		
Cable Width Max.		44	mm	max.		
Number of Poles		34				
Grid		1.27	mm			
Material		4 W 620				
Initial Permeability	μ	620		typ.		
Curie Temperature	T <sub>C</sub>	150	°C	typ.		
Test Cable		AWG26				
Test Cable Length		220	mm			


### **Typical Impedance Characteristics:**

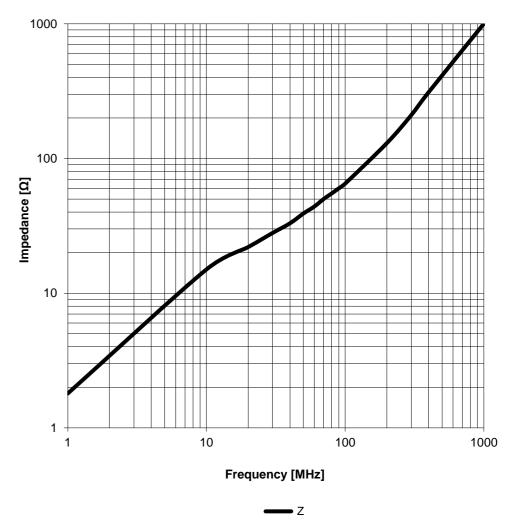


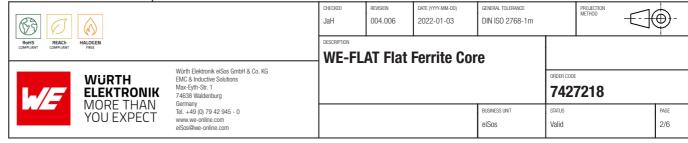

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment only. This product is not authorized for use in equipment only. This product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed do for use in areas such as millitary, aerospace, aviation, nuclear control, ship control), train control, ship control), train control, bright control in the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in a reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in a reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed and the product of the product of the product is a sufficient to a sufficient performance of the product of

### Packaging Specification - Tray: [mm]

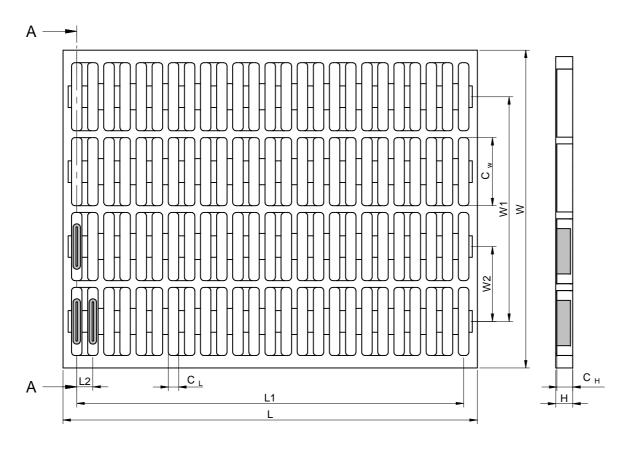

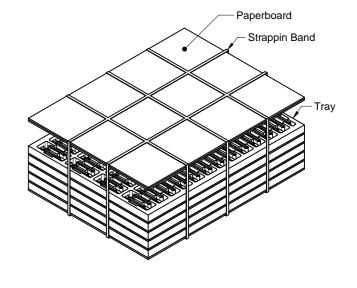


	L (mm)	L1 (mm)	L2 (mm)	C <sub>L</sub> (mm)	W (mm)	W1 (mm)	W2 (mm)	C <sub>W</sub> (mm)	H (mm)	C <sub>H</sub> (mm)	Qty. (pcs.)	Material
Tolerance	typ.	typ.	typ.	typ.	typ.	typ.	typ.	typ.	typ.	typ.		
Value	365,00	340,80	14,20	9,20	280,00	198,00	66,00	60,00	15,00	14,00	100	PET




This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment only. This product is not authorized for use in equipment only. This product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed do for use in areas such as millitary, aerospace, aviation, nuclear control, ship control), train control, ship control), train control, bright control in the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in a reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in a reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eißos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed and the product of the product of the product is a sufficient to a sufficient performance of the product of

### Packaging Specification - Carton: [mm]

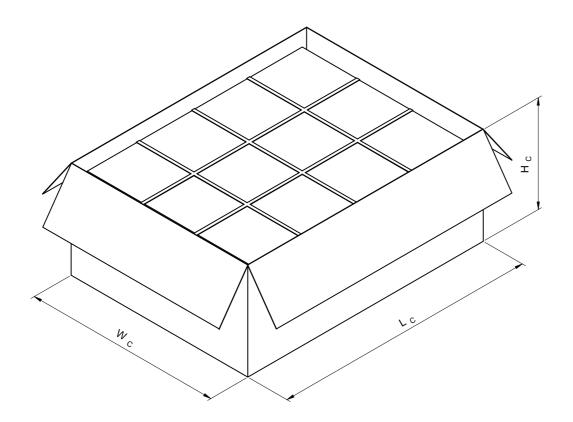

		L <sub>IC</sub> (mm)	W <sub>IC</sub> (mm)	H <sub>IC</sub> (mm)			Qty. (pcs.)	Material
1	Tolerance	typ.	typ.	typ.				
1	Value	400,00	300,00	165,00	5	6	500	Paper

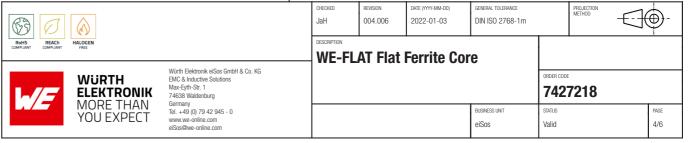

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as millitary, aerospace, aviation, nuclear as millitary, aerospace, aviation, nuclear as millitary, aerospace, aviation, submarine for such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require links have that require links have a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eisos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the central cause of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eisos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety and reliability that the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically product in a control, this product is not authorized for use in a control, this product is not as a sufficient specifically product in a control, the product is not as a sufficient specifical variation of the product is not as a sufficient specifical variation of the product is not as a suf

### **Cautions and Warnings:**

## The following conditions apply to all goods within the product series of WE-FLAT of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

- This electronic component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
  specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the
  authority of the customer. All technical specifications for standard products also apply to customer specific products.

#### **Product specific:**

#### Cleaning and Washing:

Washing agents used during the production to clean the customer application might damage or change the characteristics of the
component. Washing agents may have a negative effect on the long-term functionality of the product.

#### Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the components.. We recommend a
manual inspection after potting to avoid these effects.

#### Storage Conditions:

A storage of Würth Elektronik products for longer than 12 months is not recommended. The material characteristics of the electronic
components form a limiting factor for the storage stability. Therefore, all products shall be used within the period of 12 months based on
the day of shipment.

- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.


#### Packaging:

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- · Violation of the technical product specifications such as exceeding the maximum outer diameter of the cable will void the warranty
- The usage in an acid as well as salty environment can be the reason for oxide (rust) on the surface of the ferrite body, damage or changes of the material characteristics. The acid or salty environment may have a negative effect on the long-term function of the product.
- If a component is pre-assembled with an adhesive tape, the adhesive duration and operating temperature cannot be guaranteed. This
  depends on the surface where the component will be mounted on. It also depends on the environmental conditions the component is
  exposed to. The customer has to evaluate this for his specific application.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

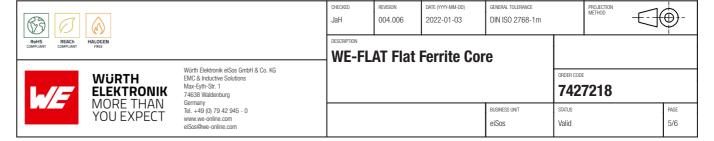

### **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle


Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

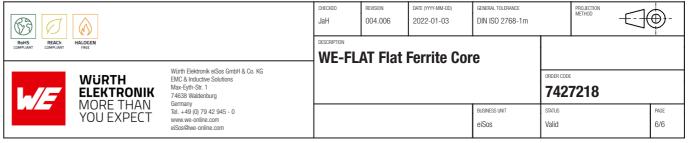

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Worth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performanced on every electronic component which is used in electrical circuits that require high safety and reliability in unclions or performance.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Cable Cores category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

FB73-422 FX28R0984-0 FX28R0984-2 AB 3X2X3SM 2643164251 2643665709 2661626402 28R1127 28R1260 28R1575 SM28R0760 2631006302 2643165451 2643178351 28R0760 SS7X4X3W 4327 030 16141 2643103102 2643164151 2943666671 2643163851 28B1101 SM28R1575 2643625902 2643626102 2643480009 2673069901 28B0268-000 28B0375-100 28B0375-300 28B0375-400 28B0500-100 28B0562-000 28B0562-200 28B0625-100 28B1020-100 28B1417-200 28R1101-000 28R1102-100 28R1127-500 28R0453-200 28R0669-000 28R0756-200 28R0480-000 28R1127-000 28R0984-200 28R2170-100 28R0592-010 28R0756-000 28R0984-000