
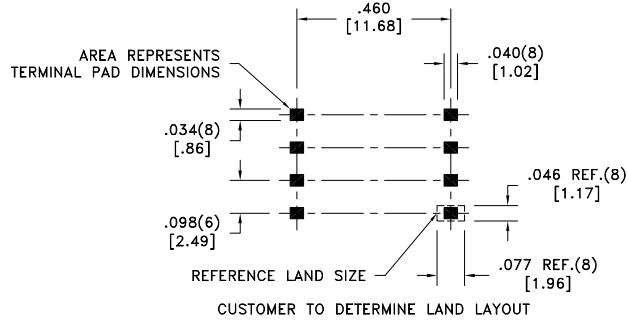
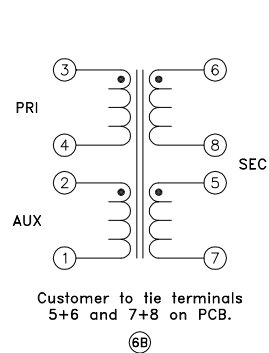


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

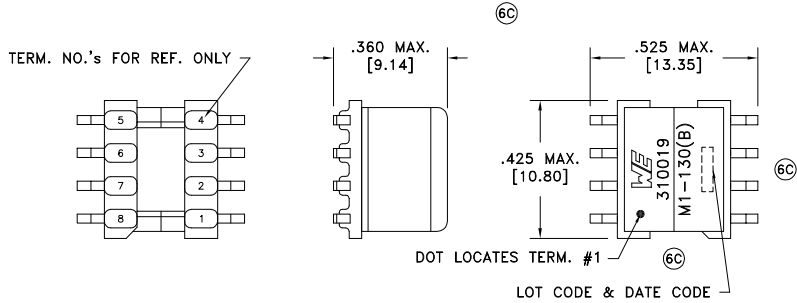

6B ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	2.60 ohms max.
D.C. RESISTANCE	3-4 @20°C	1.60 ohms max.
D.C. RESISTANCE	5-7 tie(5+6, 7+8), @20°C	0.045 ohms max.
INDUCTANCE	3-4 10kHz, 100mVAC, Ls	310uH ±10%
LEAKAGE INDUCTANCE	3-4 tie(5+6+7+8), 100kHz, 100mVAC, Ls	5uH max.
DIELECTRIC	3-6 1875VDC, 1 second	1500VDC, 1 minute
DIELECTRIC	3-5 1875VDC, 1 second	1500VDC, 1 minute
DIELECTRIC	1-4 625VDC, 1 second	500VDC, 1 minute
TURNS RATIO	(3-4):(6-8)	5.5:1, ±1%
TURNS RATIO	(3-4):(2-1)	1.466:1, ±1%

6C GENERAL SPECIFICATIONS:

- 6C OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.
- 6C UL recognized class B insulation system M1-130(B), E106391.

6C Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0523 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750310019
6C	5/17					
6B	4/09					
6A	5/07	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750310019	SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)