

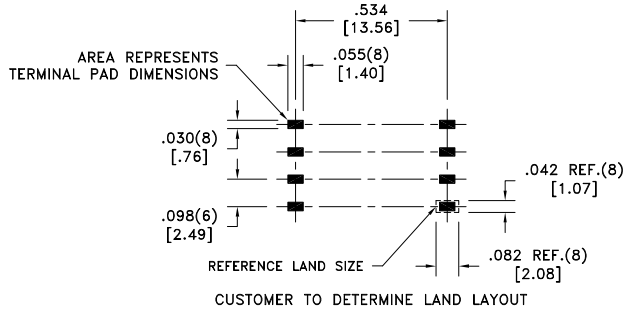



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

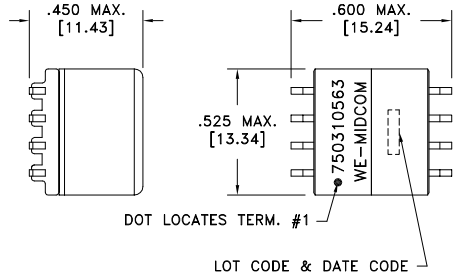

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.275ohms ±10%
D.C. RESISTANCE	3-4 @20°C	0.060 ohms ±20%
D.C. RESISTANCE	5-8 @20°C	0.060 ohms ±20%
INDUCTANCE	3-4 10kHz, 100mVAC, Ls	25.0uH ±10%
⑥C SATURATION CURRENT	20% rolloff from initial	2.8A
⑥E LEAKAGE INDUCTANCE	3-4 tie(1+2, 5+6+7+8), 100kHz, 50mVAC, Ls	500nH max.
DIELECTRIC	1-4 625VAC, 1 second	500VAC, 1 minute
DIELECTRIC	1-8 tie(2+3, 5+6), 1875VAC, 1, second	1500VAC, 1 minute
URNS RATIO	(3-4):(2-1)	2:1, ±1%
URNS RATIO	(3-4):(6-8)	1:1, ±1%
URNS RATIO	(3-4):(5-7)	1:1, ±1%

⑥C GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT
6E	4/12	Method: Tape & Reel	
6D	8/11	PKG-0328	
6C	9/10	www.we-online.com/midcom	
6B	1/09	SEE REVISION SHEET FOR REVISION LEVEL	

Tolerances unless otherwise specified:  
 Angles: ±1°      Decimals: ±.005 [.13]  
 Fractions: ±1/64      Footprint: ±.005 [.13]  
 This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE  
**TRANSFORMER**  
 eiSos p/n: 750310563

PART NO.  
**750310563**  
 SPECIFICATION SHEET 1 OF 1



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)