


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	6-7 @20°C	0.318 ohms ±10%
D.C. RESISTANCE	2-4 @20°C	1.08 ohms ±10%
D.C. RESISTANCE	3-4 @20°C	0.180 ohms ±10%
INDUCTANCE	6-7 100kHz, 100mVAC, Ls	80uH ±10%
SATURATION CURRENT	20% rolloff from initial	520mA
LEAKAGE INDUCTANCE	6-7 tie(2+3+4), 100kHz, 100mVAC, Ls	1.5uH ±33%
DIELECTRIC	2-6 1500VAC, 1 second	-
URNS RATIO	(2-4):(6-7)	2.56:1, ±1%
URNS RATIO	(6-7):(3-4)	2.57:1, ±1%

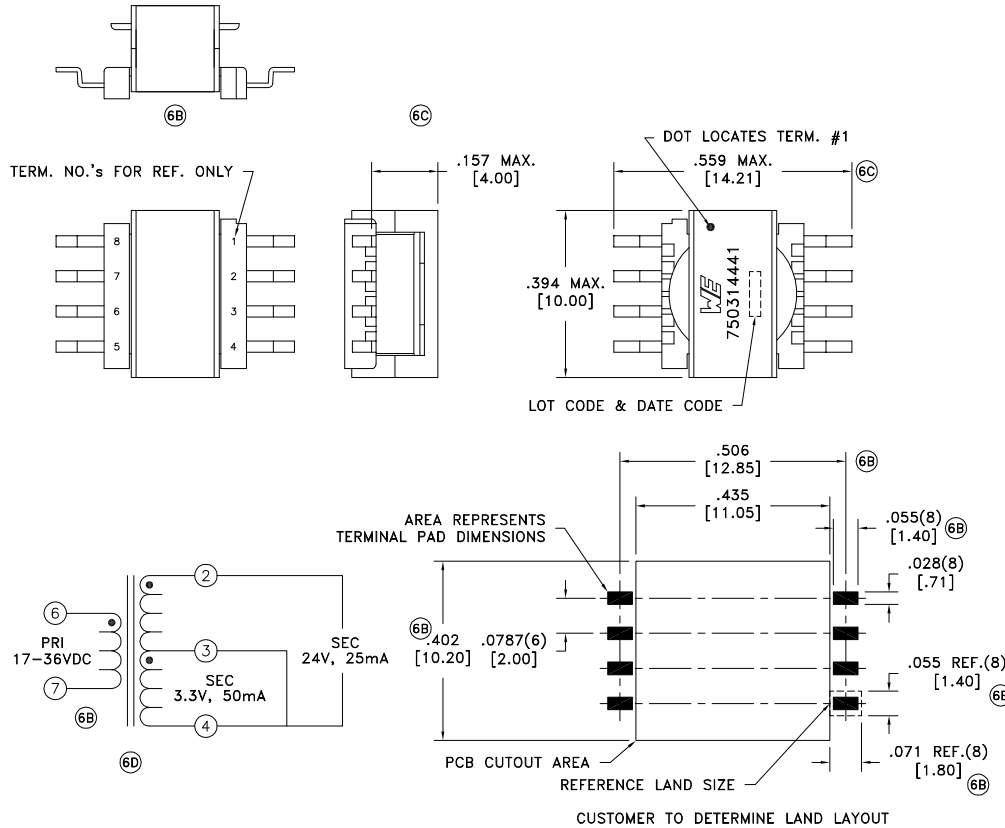

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements:

- Basic Insulation: 50V
- IEC 61010-1 Test Voltage: 860VAC

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6D	5/17	Method: Tape & Reel		Angles: ±1°	<b>TRANSFORMER</b>	<b>750314441</b>
6C	2/16	PKG-0991	Fractions: ±1/64	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		
6B	10/14	www.we-online.com/midcom				SPECIFICATION SHEET 1 OF 1
6A	7/14	SEE REVISION SHEET FOR REVISION LEVEL				

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)