



| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn100% | Yes | Yes |

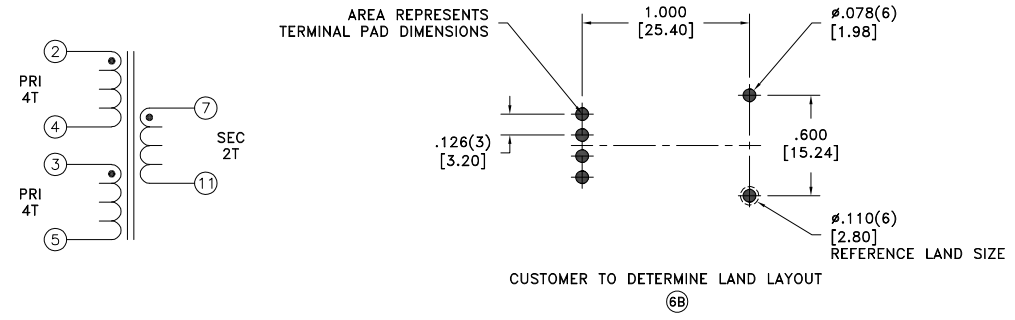

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:


| PARAMETER | TEST CONDITIONS | VALUE |
|--------------------|---|----------------|
| D.C. RESISTANCE | 2-4 @20°C | 5 mOhms max. |
| D.C. RESISTANCE | 3-5 @20°C | 5 mOhms max. |
| D.C. RESISTANCE | 7-11 @20°C | 1.2 mOhms max. |
| INDUCTANCE | 2-5 tie(3+4), 100kHz, 100mVAC, Ls | 260.0uH min. |
| LEAKAGE INDUCTANCE | 2-5 tie(3+4, 7+11), 100kHz, 100mVAC, Ls | 650nH max. |
| DIELECTRIC | 2-7 tie(3+4), 2250VDC, 1 second | - |
| URNS RATIO | (2-4):(7-11) | 2:1, ±1% |
| URNS RATIO | (3-5):(7-11) | 2:1, ±1% |

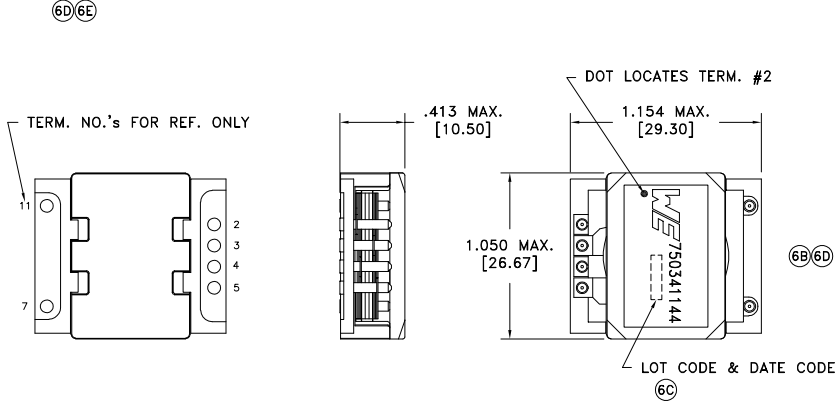

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

| REV. | DATE | Packaging Specifications |
|------|-------|---------------------------------------|
| 6E | 4/20 | Method: Tape & Reel |
| 6D | 4/14 | PKG-0793 |
| 6C | 11/12 | www.we-online.com/midcom |
| 6B | 4/12 | SEE REVISION SHEET FOR REVISION LEVEL |



Tolerances unless otherwise specified:
 Angles: ±1°
 Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750341144



PART NO.
750341144

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)