



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	5.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	5.5 mOhms max.
D.C. RESISTANCE	7-10 @20°C	1.2 mOhms max.
D.C. RESISTANCE	8-11 @20°C	1.2 mOhms max.
D.C. RESISTANCE	1-6 @20°C	200 mOhms max.
INDUCTANCE	2-5 tie(3+4), 10kHz, 1.0VAC, Ls	153.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 1+6+7+8+10+11), 100kHz, 100mVAC, Ls	0.800uH max.
DIELECTRIC	2-7 tie(1+3+4, 8+10), 2250VDC, 1 second	-
TURNS RATIO	(2-4):(3-5)	1:1, ±1%
TURNS RATIO	(2-4):(7-10)	4:1, ±1%
TURNS RATIO	(2-4):(8-11)	4:1, ±1%
TURNS RATIO	(1-6):(2-4)	1.25:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

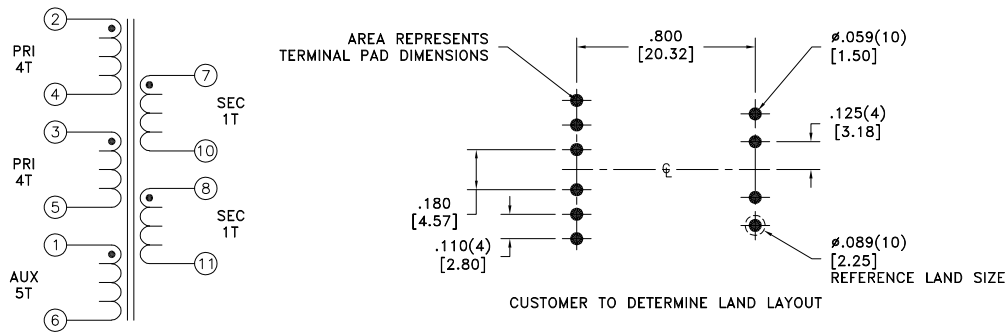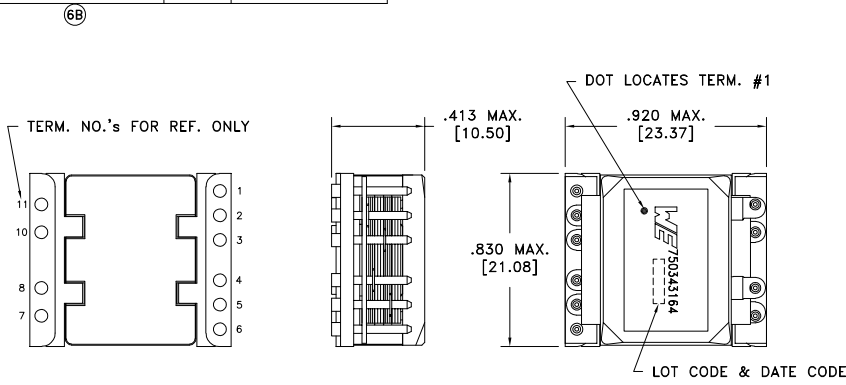

REV.	DATE	Packaging Specifications
		Method: Tape & Reel
		PKG-0871
		www.we-online.com/midcom
6B	3/20	
6A	5/17	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750343164

PART NO.
750343164

SPECIFICATION SHEET 1 OF 1



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)