

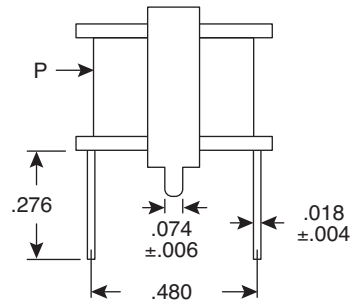






42TL Series Transformers



■ SPECIFICATIONS

- Core type/size: EI-14
- Impedance variation: ±10% @ 1KHz
- D.C. resistance tolerance: ±15%
- Insulation: >10MΩ @ 100VDC
- Breakdown voltage: 100VAC HIPOT for 1 minute
- Maximum output: 75mW
- Frequency response: ±3dB, 300Hz-3.4KHz @ 1KHz 0dB
- Waxing: vacuum treatment
- Other: can be water washed with water temperature @ <20°C.
- PC leads are soft metal wire and can be adjusted to fit a variety of applications.
- RoHS Compliant

Mouser Stock No.	Impedance (Ω)		Resistance (Ω)		Turns	
	Pri.	Sec.	Pri.	Sec.	Pri.	Sec.
42TL001-RC	500	8	35	1.0	500	60
42TL003-RC	1.2K	8	80	1.0	810	80
42TL004-RC	200	8	12	1.0	400	60
42TL008-RC	800	8	40	1.0	510	60
42TL012-RC	10K	5K	900	500	2500	1700
42TL013-RC	1K	8	60	1.0	756	60
42TL016-RC	600	600	65	55	680	680
42TL017-RC	20K	600	693	66	2840	320
42TL018-RC	7K	10K	400	385	1720	1460
42TL019-RC	10K	600	450	100	2000	390
42TL021-RC	4K	600	148	64	1320	440
42TL022-RC	1.5K	600	125	55	930	540
42TL023-RC	300	600	30	35	400	530
42TL025-RC	17K	1K	693	146	2800	460
42TL026-RC	500	16	43	1.9	540	96
42TL027-RC	1K	2K	130	140	920	470
42TL030-RC	100	100	10.9	9.10	250	250
42TL218-RC	10K	10K	715	583	1840	1840
42TL002-RC	10K	2K	500	200	2100	600
42TL009-RC	500	500	40	38	510	490
42TL031-RC	600	100	42.8	20.2	630	254

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Xicon](#) manufacturer:

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [MGPWT-00449-P](#) [PE-64961](#) [1812WBT2-4](#) [BX1194WNL](#) [1879479-1](#) [PA1528ANL](#) [T1137NLT](#) [PE-65848FNLT](#)
[H5019EFNL](#) [CX2045ALNLT](#) [TG1G-E201NV6LF](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#)
[TTC-143-H](#) [TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [TG1G-S001NZLF](#) [T1124NL](#) [1879732-1](#) [2-1879391-5](#) [MABA-010321-CT1A42](#)
[TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [H2009FNLT](#) [H5004NLT](#) [S553-5999-52-F](#) [SCMS7D43AY100PT1](#) [T5008NLT](#) [PE-68517T](#) [TG111-](#)
[E212NWLFR](#) [MGPWT-00339-P](#) [H5014FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#) [H1259NLT](#) [TX1344NLT](#) [LM-](#)
[LP-1005L](#) [H0013NLT](#) [S558-5500-JV](#) [TX1193NLT](#) [T7015NL](#)