


Dimensions (In.)

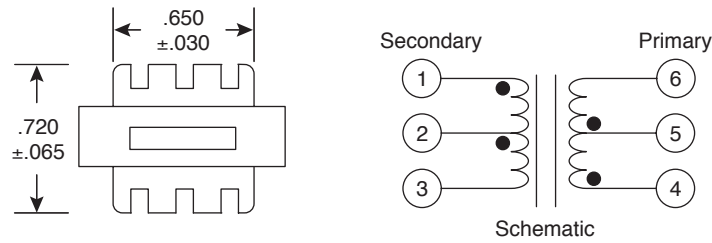

Specifications

- Core type / size: EI-24
- Impedance variation: $\pm 10\%$ @ 1KHz
- D.C. resistance: $\pm 15\%$
- Isolation voltage(primary to secondary): 100VDC min. @ 10M Ω
- Breakdown voltage: 100VAC hipot for 1 minute
- Insulation: $>10M\Omega$ @ 100VDC
- Max. output: 460mW
- Frequency response: $\pm 3\text{dB}$, 300-3.4KHz @ 1KHz 0dB
- Waxing: vacuum treatment
- Can be water washed with water temperature less than 20°C
- RoHS Compliant

Mouser Stock No.	Impedance		Resistance	
	Primary	Secondary	Primary	Secondary
42TU002-RC	10K Ω	2K Ω	600 Ω	155 Ω
42TU003-RC	1.2K Ω	8 Ω	75 Ω	1 Ω
42TU008-RC	800 Ω	8 Ω	40 Ω	1 Ω
42TU011-RC	1.5K Ω	500 Ω	120 Ω	50 Ω
42TU012-RC	10K Ω	5K Ω	425 Ω	220 Ω
42TU013-RC	1K Ω	8 Ω	75 Ω	1 Ω
42TU016-RC	600 Ω	600 Ω	65 Ω	55 Ω
42TU019-RC	10K Ω	600 Ω	600 Ω	100 Ω
42TU048-RC	48 Ω	8 Ω	2.5 Ω	0.5 Ω
42TU120-RC	120 Ω	8 Ω	7 Ω	0.7 Ω
42TU200-RC	200 Ω	8 Ω	12 Ω	0.5 Ω
42TU400-RC	500 Ω	8 Ω	18 Ω	0.7 Ω
42TU500-RC	500 Ω	500 Ω	35 Ω	28 Ω



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Xicon](#) manufacturer:

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [MGPWT-00449-P](#) [PE-64961](#) [1812WBT2-4](#) [BX1194WNL](#) [1879479-1](#) [PA1528ANL](#) [T1137NLT](#) [PE-65848FNLT](#)
[H5019EFNL](#) [CX2045ALNLT](#) [TG1G-E201NV6LF](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#)
[TTC-143-H](#) [TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [TG1G-S001NZLF](#) [T1124NL](#) [1879732-1](#) [2-1879391-5](#) [MABA-010321-CT1A42](#)
[TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [H2009FNLT](#) [H5004NLT](#) [S553-5999-52-F](#) [SCMS7D43AY100PT1](#) [T5008NLT](#) [PE-68517T](#) [MGPWT-](#)
[00339-P](#) [H5014FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#) [H1259NLT](#) [TX1344NLT](#) [LM-LP-1005L](#) [H0013NLT](#)
[S558-5500-JV](#) [TX1193NLT](#) [T7015NL](#) [T1124NLT](#)