


1. FIGURE AND DIMENSIONS()

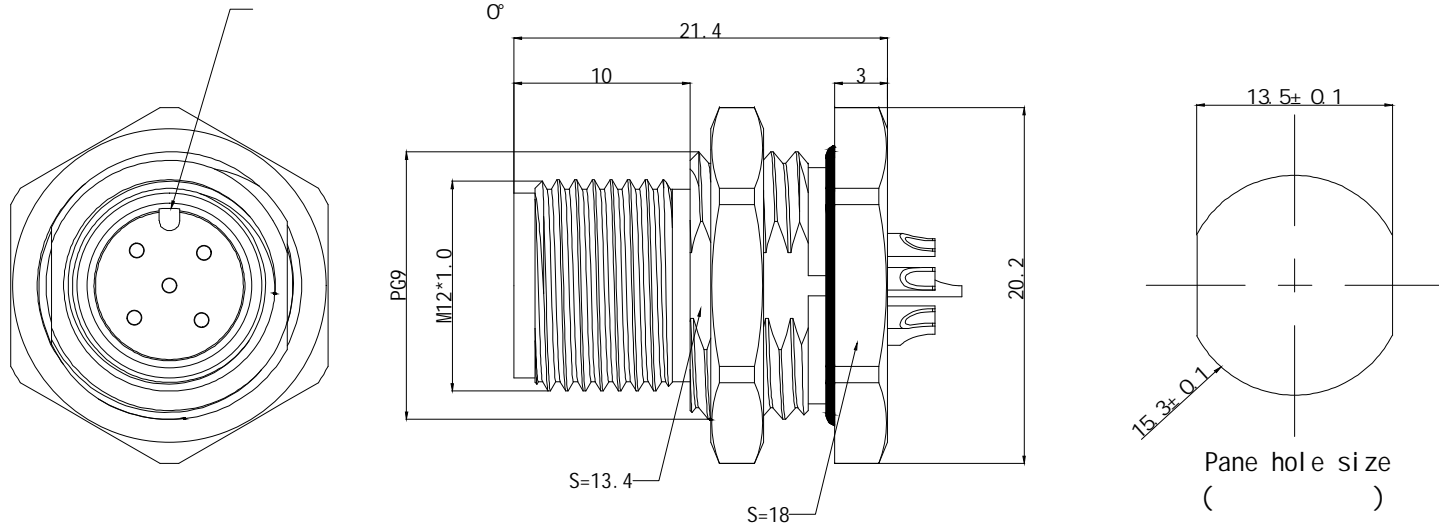

Main technical indicators()	
1. Mating ()	1000
2. Working Temperature ()	-25 +80°
3. IP Rating ()	IP 67
4. Diameter of socket end()	See the needle core parameter table/
5. Rated voltage ()	
6. Rated Current ()	Copper alloys are nickel-plated/
7. Shell material ()	
8. Pin Material ()	Copper gilding()
9. Insulation resistance()	100M
10. Insulator material ()	PA66
11. Salt spray test	72H

	P03	P04	P05	P08	P12
孔位排列					
适配线径(AWG)	22AWG	22AWG	22AWG	24AWG	26AWG
插入端直径(mm)	1.0	1.0	1.0	0.8	0.6
额定工作电压 (V)	250V	250V	60V	30V	30V
额定工作电流(A)	4A	4A	4A	2A	1.5A

Sum up()	
Series()	M12
Shell style/model /	TGA. 9: Fixed receptacle, rear panel mounted/
Button ()	1 button(1)
Termination type	Male solder()
Line diameter awg()	See the needle core parameter table/
Cable diameter	-
Match plug()	AX. ZLN. M12. P05. MPL. PBA24L1000. T5

REVA4				TITLE	DRAWING NO.	REV.	
REVA3				PART NO.	TGA. M12. P05. MPA. 9	A0	
REVA2					UNIT	mm	
REVA1					SCALE	Free	
DRAW		DATE		SHEET	10F N		
CHECK		DATE		USE	XKB INDUSTRIAL PRECISION CO., LIMITED		
APPR' D		DATE					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [67-02E12-60PX](#) [680-SMG](#) [CXS3102A181S](#)
[D38999/20FC8SA L/C](#) [75-190216-08S](#) [75-190611-03S](#) [75-474014-05S](#) [75-474618-04S](#) [75-474620-07P](#) [799539-000](#) [805-005-07NF11-19PC](#)
[805-005-07NF15-7PA](#) [FMP.2M.310.XLCT](#) [836783-1](#) [862256-1](#) [866857-1](#) [867865-1](#) [PT08P-14-19S](#) [PT08P-14-5S](#) [QCM019PC2DC012B](#)
[121583-0217](#) [121667-0020](#) [RD10A16-19-P6CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240268](#) [1301240275](#) [1301860906](#) [DCU-08BFEA-](#)
[LL7001](#) [RM15WTP-CP\(5\)\(71\)](#) [14482](#) [16283-18](#) [1877910-1](#) [206039-3](#) [206323-1](#) [207002-2](#) [207682-1](#) [CA06COME14SA7P](#) [211777-1](#) [JL04-](#)
[1012CK\(05\)-R](#) [JL04V-2A28-11PE-R](#) [JL04V-2E10SL-3PE-B-R](#) [JL04V-2E20-15PE-B-R](#) [JL04V-2E20-4PE-B-R](#) [JL04V-6A24-11SE-EB-R](#)
[JN1AS04MK1X](#)