
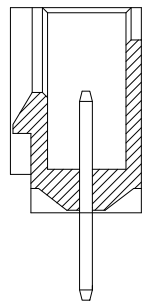


REV.	Q'TY	ECN. NO.	APR.	DATE

PRELIMINARY  
DESIGN IS SUBJECT  
TO CHANGE WITHOUT  
PRIOR NOTICE



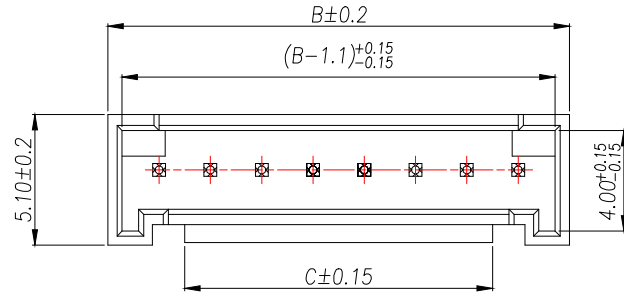


SECTION A-A


技术要求:

1. 塑件材料: PA66
2. 接触件: 黄铜镀锡
3. 接触电阻:  $\leq 10m\Omega$
4. 绝缘电阻:  $\geq 1000M\Omega$
5. 额定电压: 250V AC DC
6. 额定电流: 2.0A AC DC
7. 耐压: 能承受 1000V AC/Min ute
8. 工作温度:  $-25^{\circ}\sim\sim+85^{\circ}$
9. 可焊性试验: 浸锡面积  $\geq 95\%$  温度  $220^{+5}_{-0}$ , 时间  $2.5\pm 0.5$  秒
10. 铅和镉等六大有害物质含量要符合环保要求

Part No	PIN	A	B	C
XY-HY2.0-2A11	2	2	6	/
XY-HY2.0-3A11	3	4	8	2
XY-HY2.0-4A11	4	6	10	4
XY-HY2.0-5A11	5	8	12	6
XY-HY2.0-6A11	6	10	14	8
XY-HY2.0-7A11	7	12	16	10
XY-HY2.0-8A11	8	14	18	12
XY-HY2.0-9A11	9	16	20	14
XY-HY2.0-10A11	10	18	22	16
XY-HY2.0-11A11	11	20	24	18
XY-HY2.0-12A11	12	22	26	20
XY-HY2.0-13A11	13	24	28	22
XY-HY2.0-14A11	14	26	30	24
XY-HY2.0-15A11	15	28	32	26

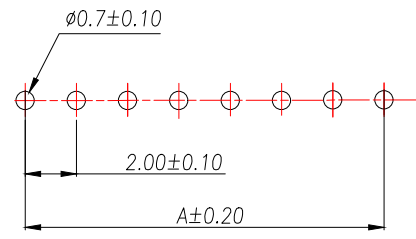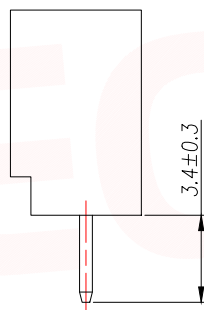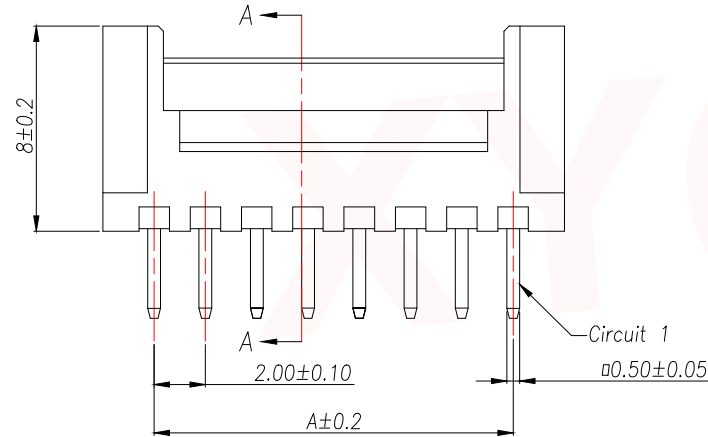

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

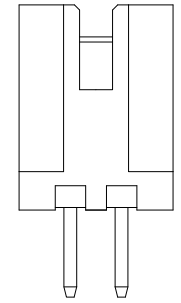

2P外观

2	Contact	Brass	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u".MIN.
1	Wafer	PA66(UL94V-0)	1	本色
序号	名称	材料	数量	备注

DIMENSION IN mm		<p>厦门市辛译精密电子有限公司 Xiamen XinYi Xyecomm Electronics Co.,Ltd</p>		
TOLERANCE UNLESS OTHERWISE SPECIFIED				
.X±0.35	X.*± 5°	APR.	Alex	TITLE: WAFER 2.0mm H8.0mm 180° DIP
.XX±0.25	.X.*± 3°	CHK.	Jack	DWG NO. XY-HY2.0-NA11
.XXX±0.15	.XX.*± 1°	DRA.	Can	PROJ.  CUSTOMER DRAWING
SIZE A4	SCALE 1:1	SHEET 1/1	REV. A	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XYECONN](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)