
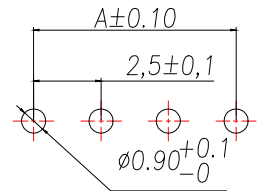
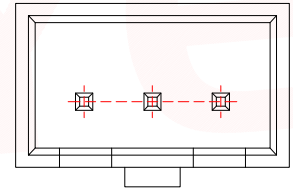
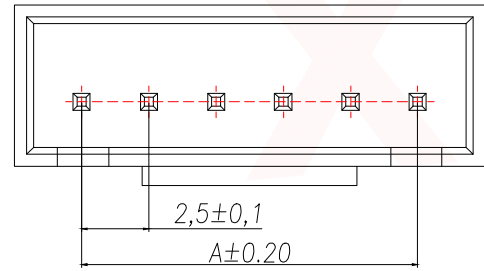
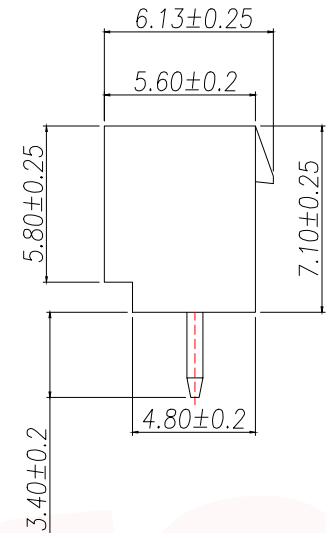
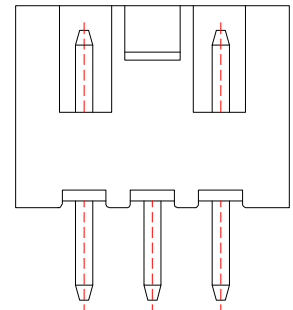


REV.	Q'TY	ECN. NO.	APR.	DATE

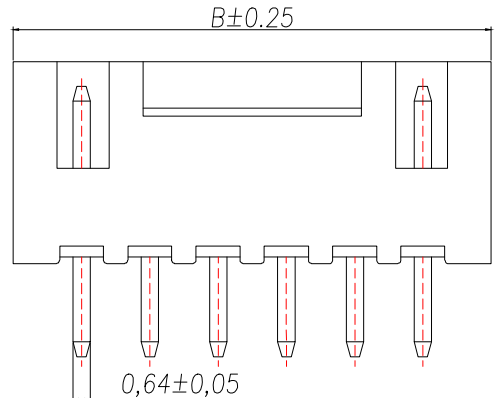

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

- 技术要求:
1. 塑件材料: PA66(UL-94V-0)
  2. 接触件: 黄铜镀锡
  3. 接触电阻:  $\leq 10m\Omega$
  4. 绝缘电阻:  $\geq 100M\Omega$
  5. 额定电压: 250V AC DC
  6. 额定电流: 2.0A AC DC
  7. 耐压: 能承受1000V AC/Minute
  8. 工作温度:  $-25^{\circ}\sim+85^{\circ}$
  9. 可焊性试验: 浸锡面积 $\geq 95\%$  温度235 , 时间 $2.5\pm 0.5$ 秒
  10. 铅和镉等六大有害物质含量要符合环保要求。

Part No	Pin	A	B
XY-XHB2.54-2A11	2	2.50	7.50
XY-XHB2.54-3A11	3	5.00	10.00
XY-XHB2.54-4A11	4	7.50	12.50
XY-XHB2.54-5A11	5	10.00	15.00
XY-XHB2.54-6A11	6	12.50	17.50
XY-XHB2.54-7A11	7	15.00	20.00
XY-XHB2.54-8A11	8	17.50	22.50
XY-XHB2.54-9A11	9	20.00	25.00
XY-XHB2.54-10A11	10	22.50	27.50
XY-XHB2.54-11A11	11	25.00	30.00
XY-XHB2.54-12A11	12	27.50	32.50
XY-XHB2.54-13A11	13	30.00	35.00
XY-XHB2.54-14A11	14	32.50	37.50
XY-XHB2.54-15A11	15	35.00	40.00
XY-XHB2.54-16A11	16	37.50	42.50
XY-XHB2.54-17A11	17	40.00	45.00
XY-XHB2.54-18A11	18	42.50	47.50
XY-XHB2.54-19A11	19	45.00	50.00
XY-XHB2.54-20A11	20	47.50	52.50

2	端子Contact	黄铜	N*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u"MIN
1	基座Wafer	PA66(UL94V-0)	1	白色
序号	名称	材料	数量	备注

DIMENSION IN mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyecomm Electronics Co.,Ltd			
TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE: WAFER XHB2.54MM 带直针			
.X±0.35	.X.*± 5°	APR.	Alex	DWG NO. XY-XHB2.54-NA11	
.XX±0.25	.X.*± 3°	CHK.	Jack	PROJ.  CUSTOMER DRAWING	
.XXX±0.15	.XX.*± 1°	DRA.	Can	SIZE A4	SCALE 1:1
				SHEET 1/1	REV. A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XYECONN](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)