



Plastic-Encapsulate Transistors

■ Features


- High efficiency.
- Soft recovery characteristics.
- Beautiful High Temperature Character.
- High Reliability.
- RoHs Product.

■ Applications

- High voltage high frequency switching mode power supplies.
- High voltage high frequency power factor correctors.

■ External and internal structure

TO-247AB



■ Marking MUR3020PT

■ Maximum Ratings

Item	Symbol	Unit	Conditions	Data
Maximal Inverted Repetitive Peak Voltage	VRRM	V		200
*Average Rectified Forward Current	IFAV	A	Rated VR-20Khz Square Wave - 50% duty cycle	30
MAX. Reverse Recovery Time	TRR	nS	IF=0.5A IR=1.0A IREC=0.25A	35
Typical Thermal Resistance Package =TO-247AB (per leg)	RθJc	°C/W		0.5
Forward Peak Surge Current	IFSM	A	Rated Load 8.3 Half Mssine Wave-According to JEDEC Method	200
Maximum Rate of Voltage Change (at Rated VR)	dv/dt	V/uS		10000
Operating Junction Temperature	TJ	°C		-40- +150
Storage Temperature	TSTG	°C		-40- +150

*IF(AV)= 15A×2


■ Electrical Characteristics

Item	Test Condition		TYP.	MAX.	Unit
IR	TJ =25°C	VR=VRRM		0.05	mA
	TJ =125°C			25	mA
VF	TJ =25°C	IF=15A	1.0	1.2	V
	TJ =125°C	IF=15A		0.9	V




■ Characteristics (Typical)


The forward voltage and forward current curve

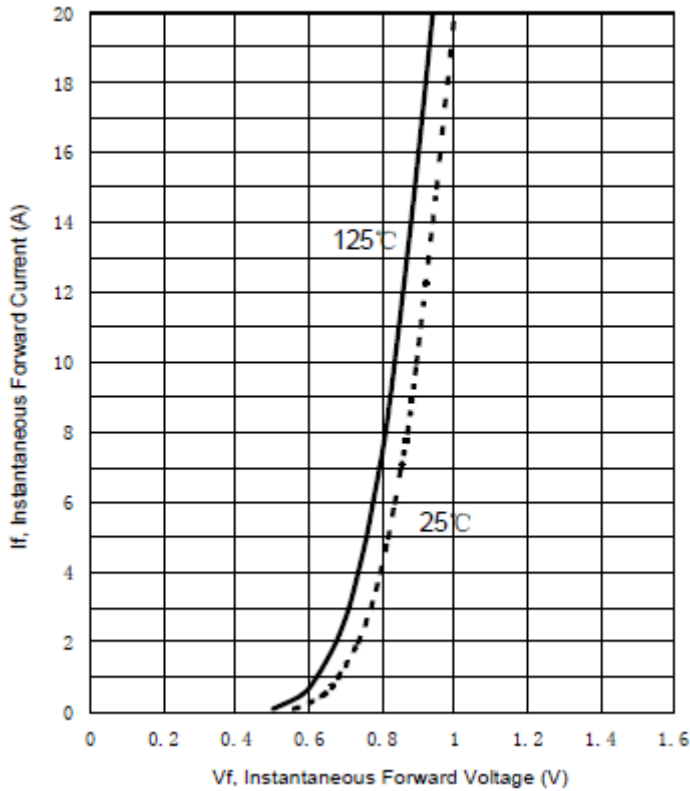

Current derating curve, per element

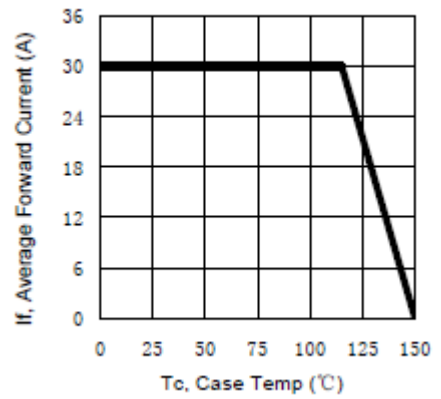


The reverse leak current and the reverse voltage (single-device) curve.

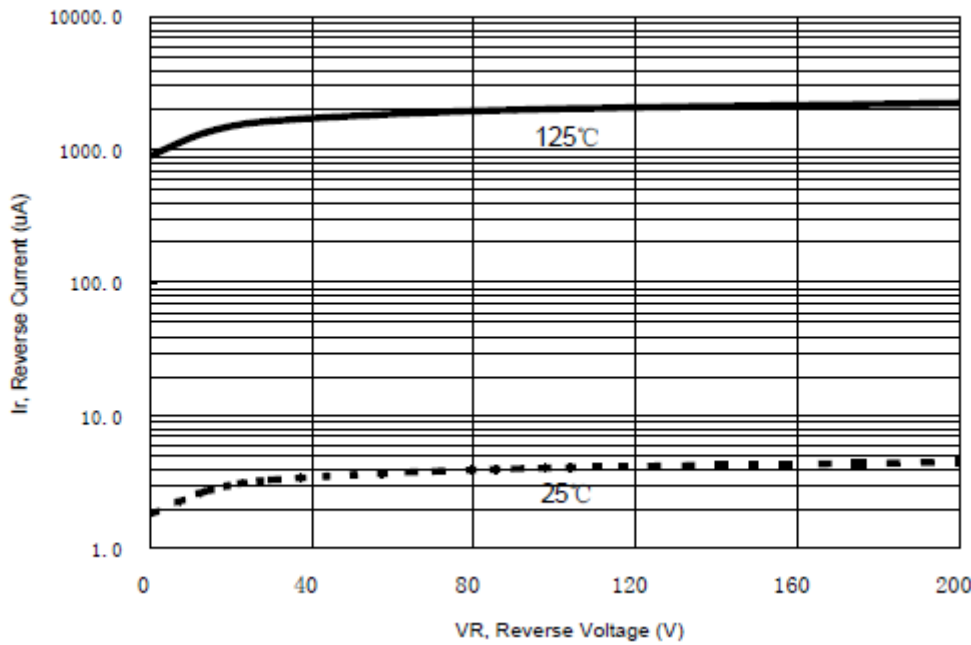



■ Plastic surface mounted package

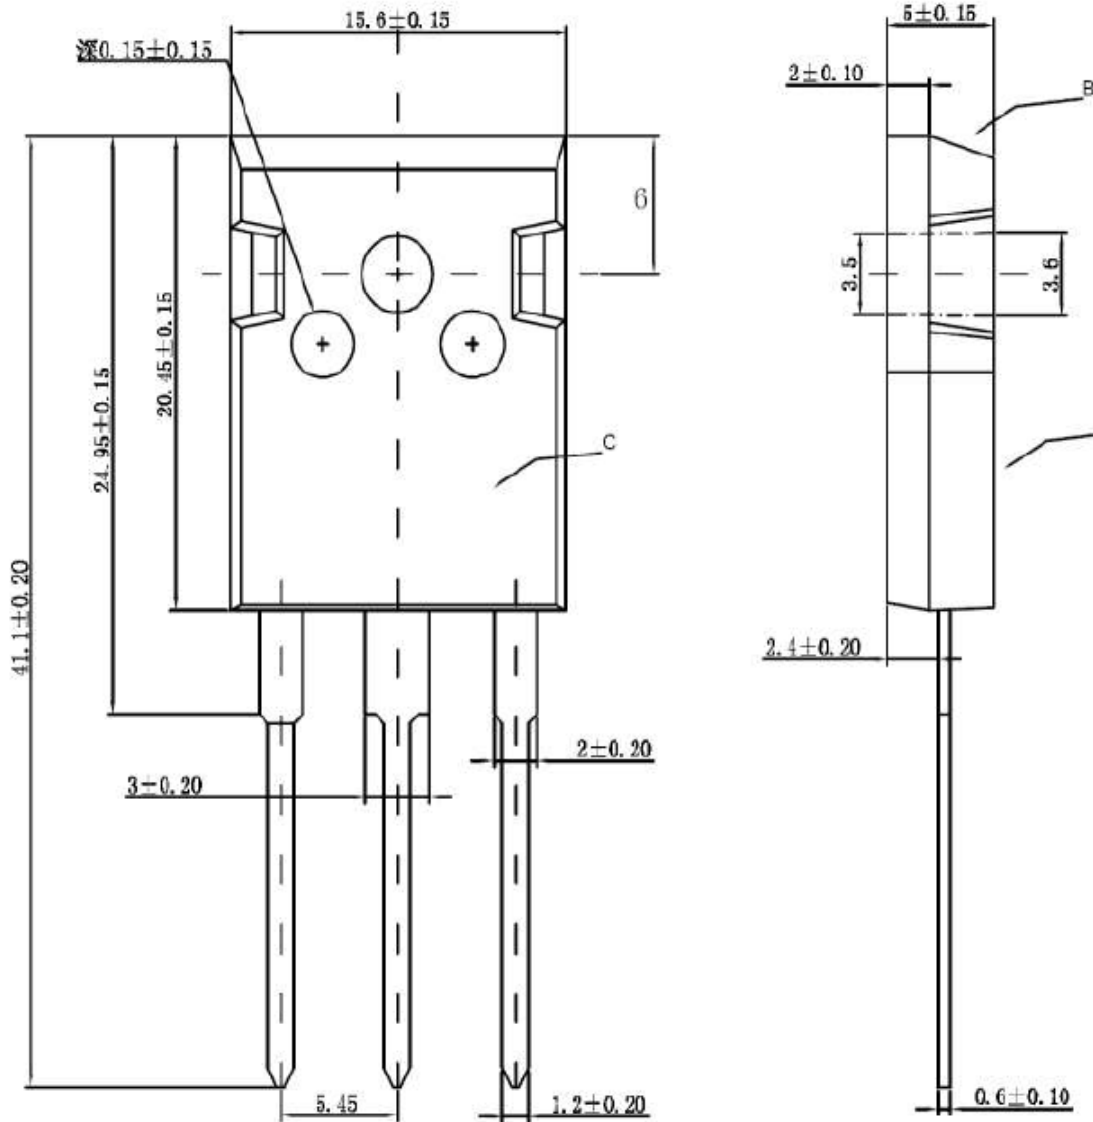TO-247AB

■ Packing Information

Device	Package	Shipping
MUR3020PT	TO-247AB	30 pieces / tube

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [Yangjie manufacturer](#):

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)
[MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#)
[BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [1N4004](#) [MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)