

High voltage silicon diodes for micro-wave oven

Reverse Voltage – 12kV

Forward Current –350mA

FEATURES

◆High reliability


MECHANICAL DATA

◆Case: Molded Plastic Body

◆Epoxy meets UL 94V-0 flammability rating

◆Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201class 1A whisker test.

◆Polarity: Color band denotes cathode end

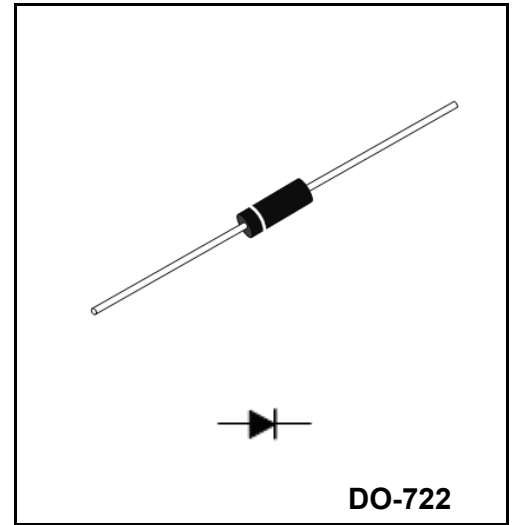


Maximum rating (Ta=25°C unless otherwise noted)

Parameter		Symbol	2CL3512H	Unit
Repetitive peak reverse voltage		V_{RRM}	12	KV
Average forward current	60Hz half-sine wave, Resistance load, Ta≤60°C	$I_{F(AV)}$	350	mA
Surge(Non-repetitive)forward current	60Hz half-sine wave, 1cycle, Ta=25°C	I_{FSM}	50	A
Reverse surge current	Wp=1ms, Rectangular-wave, One-shot, Ta=25°C	I_{RSM}	100	mA
Peak forward voltage	$I_{FM}=350mA$	V_{FM}	≤12	V
Peak reverse current $V_{RM}=V_{RRM}$		I_{RRM1}	≤5	μA
Avalanche breakdown voltage	$I_R=100\mu A$	$V_{(BR)}$	≥16.5	KV
Storage Temperature Range		T_{stg}	-40 ~ +130	°C
Virtual junction temperature		$T_{(vj)}$	130	°C

Notes :Cooling Requirement: Cathode terminal is fastened to radiating fin that size is more than 50mm×50mm×0.6mm
Wind-cooled velocity is more than 0.5m/s.

Package outline dimensions

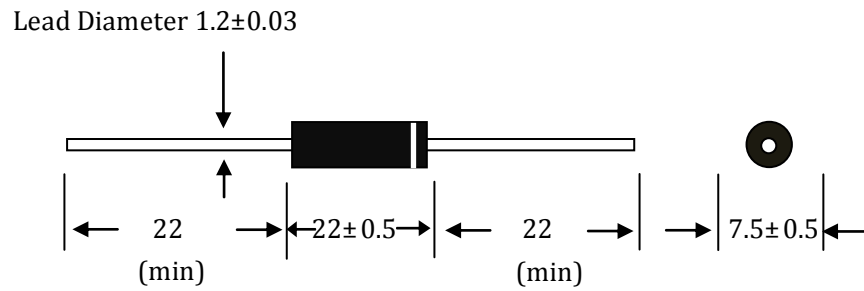

ORDERING INFORMATION

Package	Packing Method	Packing Quantity	Industry Standard
DO-722	Bulk	500pcs/Box	EIA-481-1
DO-722	Tape	5000pcs/Box	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [YFW Electronics manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#)
[IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [BAV70HDW-7](#)
[BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#) [1N4004](#)
[MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [W0503SH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)