


**NPN Plastic-Encapsulate Transistors**

**Audio Frequency Amplifier & High Frequency OSC.**

- ◆Complement to 2SA733
- ◆Collector-Base Voltage :  $V_{CBO}=60V$
- ◆High Current Gain Bandwidth Product :  $f = 300MHz$  (TYP)

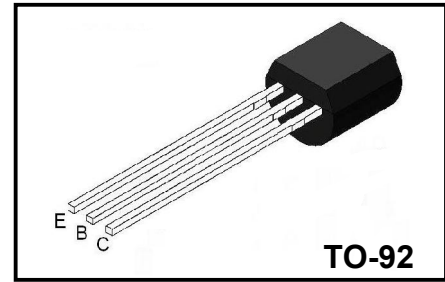

**Absolute Maximum Rating (Ta=25°C)**

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$BV_{CBO}$	60	V
Collector-Emitter Voltage	$BV_{CEO}$	50	V
Emitter-Base Voltage	$BV_{EBO}$	5	V
Collector Current	$I_C$	150	mA
Collector Power Dissipation	$P_C$	250	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-55~+150	°C

**Electrical Characteristics (Ta=25°C)**

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Collector-base breakdown voltage	$BV_{CBO}$	$I_C = 100\mu A, I_E = 0$	60			V
Collector-emitter breakdown voltage	$BV_{CEO}$	$I_C = 1mA, I_B = 0$	50			V
Emitter-base breakdown voltage	$BV_{EBO}$	$I_E = 100\mu A, I_C = 0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = 40V, I_E = 0$			0.1	$\mu A$
Collector cut-off current	$I_{CEO}$	$V_{CE} = 40V, I_B = 0$			0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 5V, I_C = 0$			0.1	$\mu A$
DC current gain	$h_{FE}$	$V_{CE} = 6V, I_B = 1mA$	90		600	
Collector-emitter saturation voltage	$V_{CESAT}$	$I_C = 100mA, I_B = 10mA$			0.3	V
base -emitter saturation voltage	$V_{BESAT}$	$I_C = 100mA, I_B = 10mA$			1.0	V
Transition frequency	$f_T$	$V_{CE} = 6V, I_B = 10mA$		300		MHz

**hFE Classification**

Classification	R	Q	P	K
hFE	90-180	135-270	200-400	300-600

Package Dimensions

TO-92

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	3.30	3.70	0.130	0.146
A1	2.30	2.70	0.091	0.106
b	0.40	0.50	0.016	0.020
b1	0.50	0.70	0.020	0.028
c	0.35	0.45	0.014	0.018
D	4.45	4.70	0.175	0.185
E	4.40	4.65	0.173	0.183
e	1.17	1.37	0.046	0.054
e1	2.34	2.64	0.092	0.104
L	13.50	14.50	0.531	0.571
L1	1.80	2.20	0.071	0.087

Package	Packing Method	Pack Q uantity
TO-92	Bulk	1000pcs/Bag
TO-92	Tape	2000pcs/Box

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [YFW Electronics manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)