


High voltage silicon diodes

Reverse Voltage – 16kV

Forward Current –350mA

FEATURES

◆High reliability

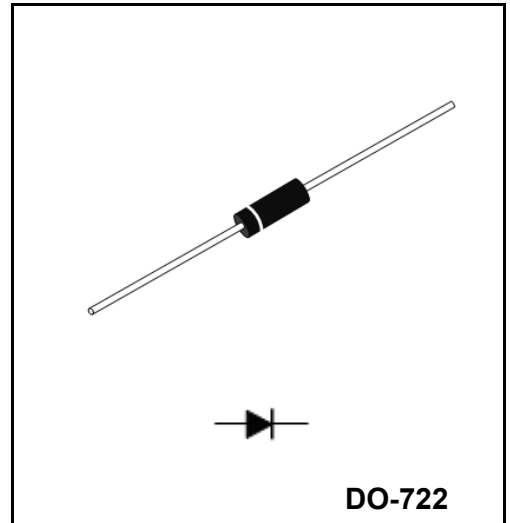

MECHANICAL DATA

◆Case: Molded Plastic Body

◆Epoxy meets UL 94V-0 flammability rating

◆Terminals: Pure tin plated leads, solderable per J-STD-002 and JESD22-B102, E3 suffix for consumer grade, meet JESD201class 1A whisker test.


◆Polarity: Color band denotes cathode end

Maximum rating (Ta=25°C unless otherwise noted)

Parameter		Symbol	HVM16	Unit
Repetitive peak reverse voltage		V_{RRM}	16	KV
Average forward current	60Hz half-sine wave, Resistance load, Ta≤60°C	$I_{F(AV)}$	350	mA
Surge(Non-repetitive)forward current	60Hz half-sine wave, 1cycle, Ta=25°C	I_{FSM}	30	A
Reverse surge current	Wp=1ms, Rectangular-wave, One-shot, Ta=25°C	I_{RSM}	100	mA
Peak forward voltage	$I_{FM}=350mA$	V_{FM}	≤14	V
Peak reverse current $V_{RM}=V_{RRM}$		I_{RRM1}	≤5	μA
Avalanche breakdown voltage	$I_R=100\mu A$	$V_{(BR)}$	≥16.5	KV
Storage Temperature Range		T_{stg}	-40 ~ +130	°C
Virtual junction temperature		$T_{(vj)}$	130	°C

Notes :Cooling Requirement: Cathode terminal is fastened to radiating fin that size is more than 50mm×50mm×0.6mm
Wind-cooled velocity is more than 0.5m/s.

Package outline dimensions

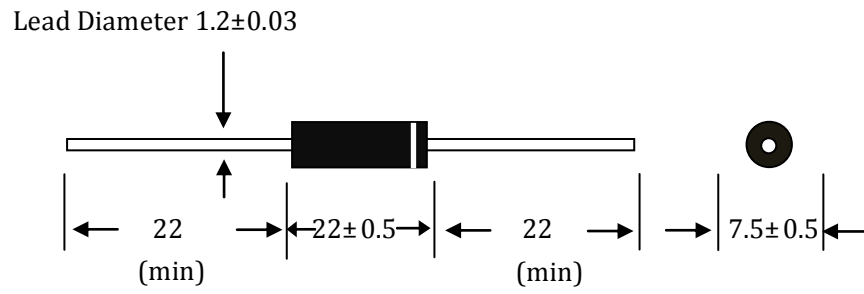

Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
DO-722	BOX	5000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [1N5397](#) [1N4005-TR](#) [1N4007-BP](#) [UFS120Je3/TR13](#) [20ETS12S](#) [RRE02VS6SGTR](#) [MS306](#) [A1N5404G-G](#)
[CRF02\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [1N5395-TP](#) [UES1302](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [DZ-](#)
[1380](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [SCF7500](#) [SM100](#) [ACGRA4001-HF](#) [SKN70/08](#) [NTE5819](#) [NTE5827](#) [NTE5828](#) [NTE5911](#)
[NTE5915](#) [NTE6104](#) [NTE6163](#) [NTE6164](#) [NTE6165](#) [NTE6364](#) [TSD3G](#) [SET130312](#) [NRVUS110VT3G](#) [UES1106](#) [UES1306](#)
[NRVUS240VT3G](#) [D5FE60-5063](#) [R4000GPS-TP](#) [D4015L56TP](#) [UES1306HR2](#) [FX20K120](#) [D20XB60-7101](#)