

■ Features

- Line filters suppressing conductive noise ranging from low to high frequency generated at power supply circuit of various electronic equipment.
- High levels of safety and reliability.
- Extremely cost effective design.
- Useful for application requiring inductance to vary with current load changes.
- Self electromagnetic shielding. Easy PC board mounting on version application.

■ Applications

- TV and Audio equipment.
- Switching power supplies.
- Motherboard.
- Buzzers and Alarm systems.
- Other noise filters.

■ Product Identification

<u>YDTC</u>	<u>90125</u>	—	<u>861</u>	<u>L</u>
(1)	(2)		(3)	(4)


(1) : Type

(2) : Dimensions

(3) : Inductance value: 861=860uH


(4) : Style: L- vertical W-horizontal

■ **Shapes and Dimensions (Unit: mm)**

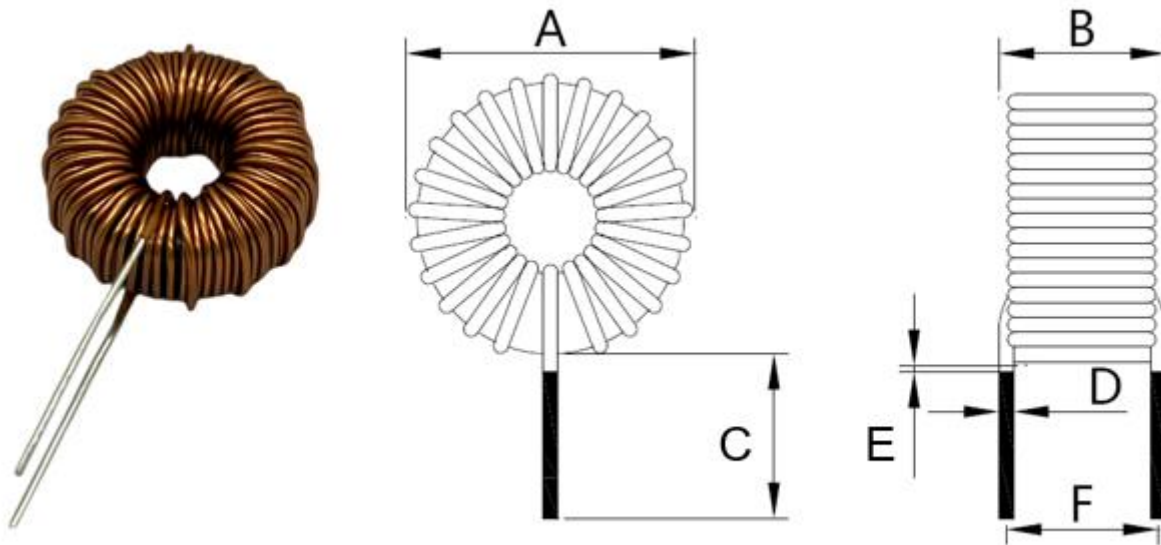

A Max.	B Max.	C	D	E Max.	F Typ.
29.0	16.0	25.0±2.0	0.8±0.1	1.5	14.0

■ **Schematic Circuit**

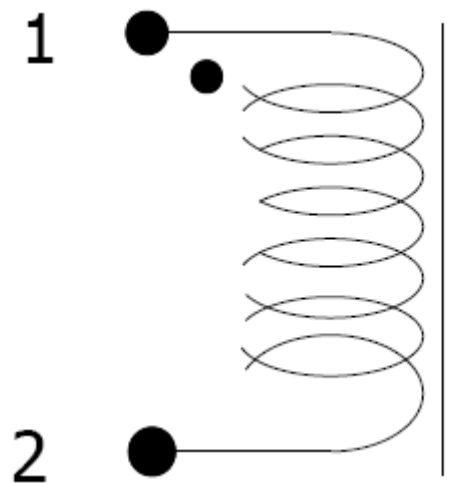

■ **General Specification**

- ※ Rating DC current: Temperature rise(ΔT) is 40°C approximately at Irms.
- ※ Storage temp: -25°C ~ +125°C, R.H.: 30%~70%
- ※ Operation Temperature: -40°C ~ +125°C (Including self-heating) .

■ Electrical Specification(at 25°C)

Test Item	Spec	Pin	Test Condition	Test Instruments
L	860uH±20%	1-2	10KHz/0.25V	TH-2828
DCR	150mΩ Max.	1-2	25°C	502BC
Irms	3A Max.	1-2	ΔT≤40°C	TH2829A+TH1778A


■ Winding Construction

Order	S – F	Wire Size	Turns	Notes
N1	1 – 2	2UEWF Φ0.8×1P	97.5 REF	Split winding

■ Reliability

No.	Item	Material	Vendor	Rating	UL File
1	CORE	S090-125 Iron silicon aluminum Black coating	CHENXING		
		MKS229125 Iron silicon aluminum Black coating	MIRRACK		
2	WIRE	2UEWF Φ0.8	PROSPERITY	155°C	E196072
		1UEWF Φ0.5	PACIFIC	155°C	E201757
3	VARNISH	DA-700-6	QIANG DA	130°C	E347463
4	SOLDER	SN99.90AA	YUNNAN TIN	N/A	

■ Packaging

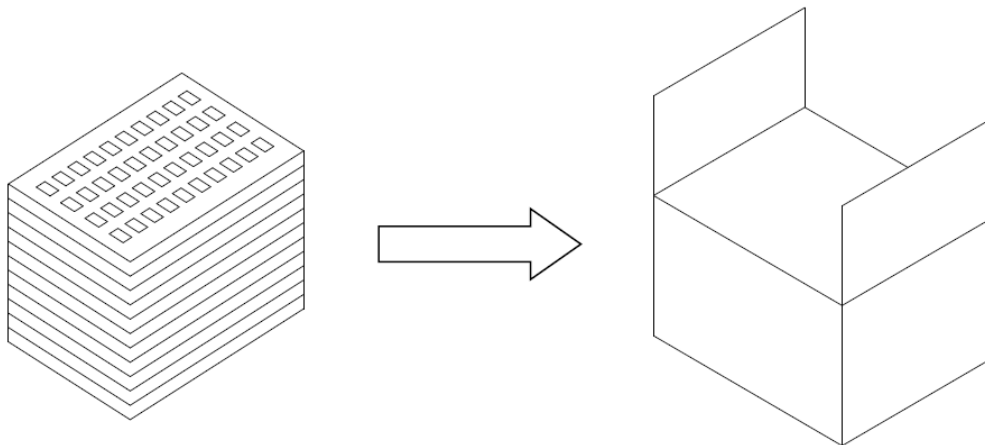

No.	Packaging Materials	Reference Dimension	Material	Quantity
1	Box(T003)	265×180×15(mm)	PET	32PCS/Box
2	Master Carton	315×210×135(mm)	K36K	10Box/Carton

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [YJYCOIN](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)