


# BC846 TRANSISTOR (NPN)


## BC847

## BC848

Equivalent Circuit:



SOT-23



1.BASE  
2.EMITTER  
3.COLLECTOR

### FEATURES:

- ※ Ideally suited for automatic insertion
- ※ For switching and AF amplifier applications

### MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	VCBO	BC846	80
		BC847	50
		BC848	30
Collector-Emitter Voltage	VCEO	BC846	65
		BC847	45
		BC848	30
Emitter-Base Voltage	VEBO	6	V
Collector Current	IC	0.1	A
Collector Power Dissipation	PC	200	mW
Thermal Resistance From Junction To Ambient	RθJA	625	°C/W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55~+150	°C

### DEVICE MARKING:

BC846A=1A; BC846B=1B

BC847A=1E; BC847B=1F; BC847C=1G

BC848A=1J; BC848B=1K; BC848C=1L



**ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)**


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-base breakdown voltage BC846 BC847 BC848	V(BR)CBO	IC= 10μA, IE=0	<b>80</b> <b>50</b> <b>30</b>			V
Collector-emitter breakdown voltage BC846 BC847 BC848	V(BR)CEO	IC= 10mA, IB=0	<b>65</b> <b>45</b> <b>30</b>			V
Emitter-base breakdown voltage	V(BR)EBO	IE=10μA, IC=0	6			V
Collector cut-off current BC846 BC847 BC848	ICBO	VCB=70 V , IE=0 VCB=50 V , IE=0 VCB=30 V , IE=0			0.01	μA
Emitter cut-off current	IEBO	VEB= 5V , IC=0			0.1	μA
DC current gain BC846A; 847A; 848A BC846B; 847B; 848B BC847C; BC848C	hFE	VCE=5V, IC= 2mA	110 200 420		220 450 800	
Collector-emitter saturation voltage	VCE(sat)	IC=100 mA, IB= 5mA			0.5	V
Base-emitter saturation voltage	VBE(sat)	IC=100 mA, IB= 5mA			1.1	V
Transition frequency	fT	VCE=5V, IC= 10mA f=100MHz	100			MHz
Collector Current Capacitance	Cob	VCE=10V, f=1MHz			4.5	pF

**CLASSIFICATION OF hFE**

Rank	L	H	J
Range	120-200	200-350	300-400



### TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

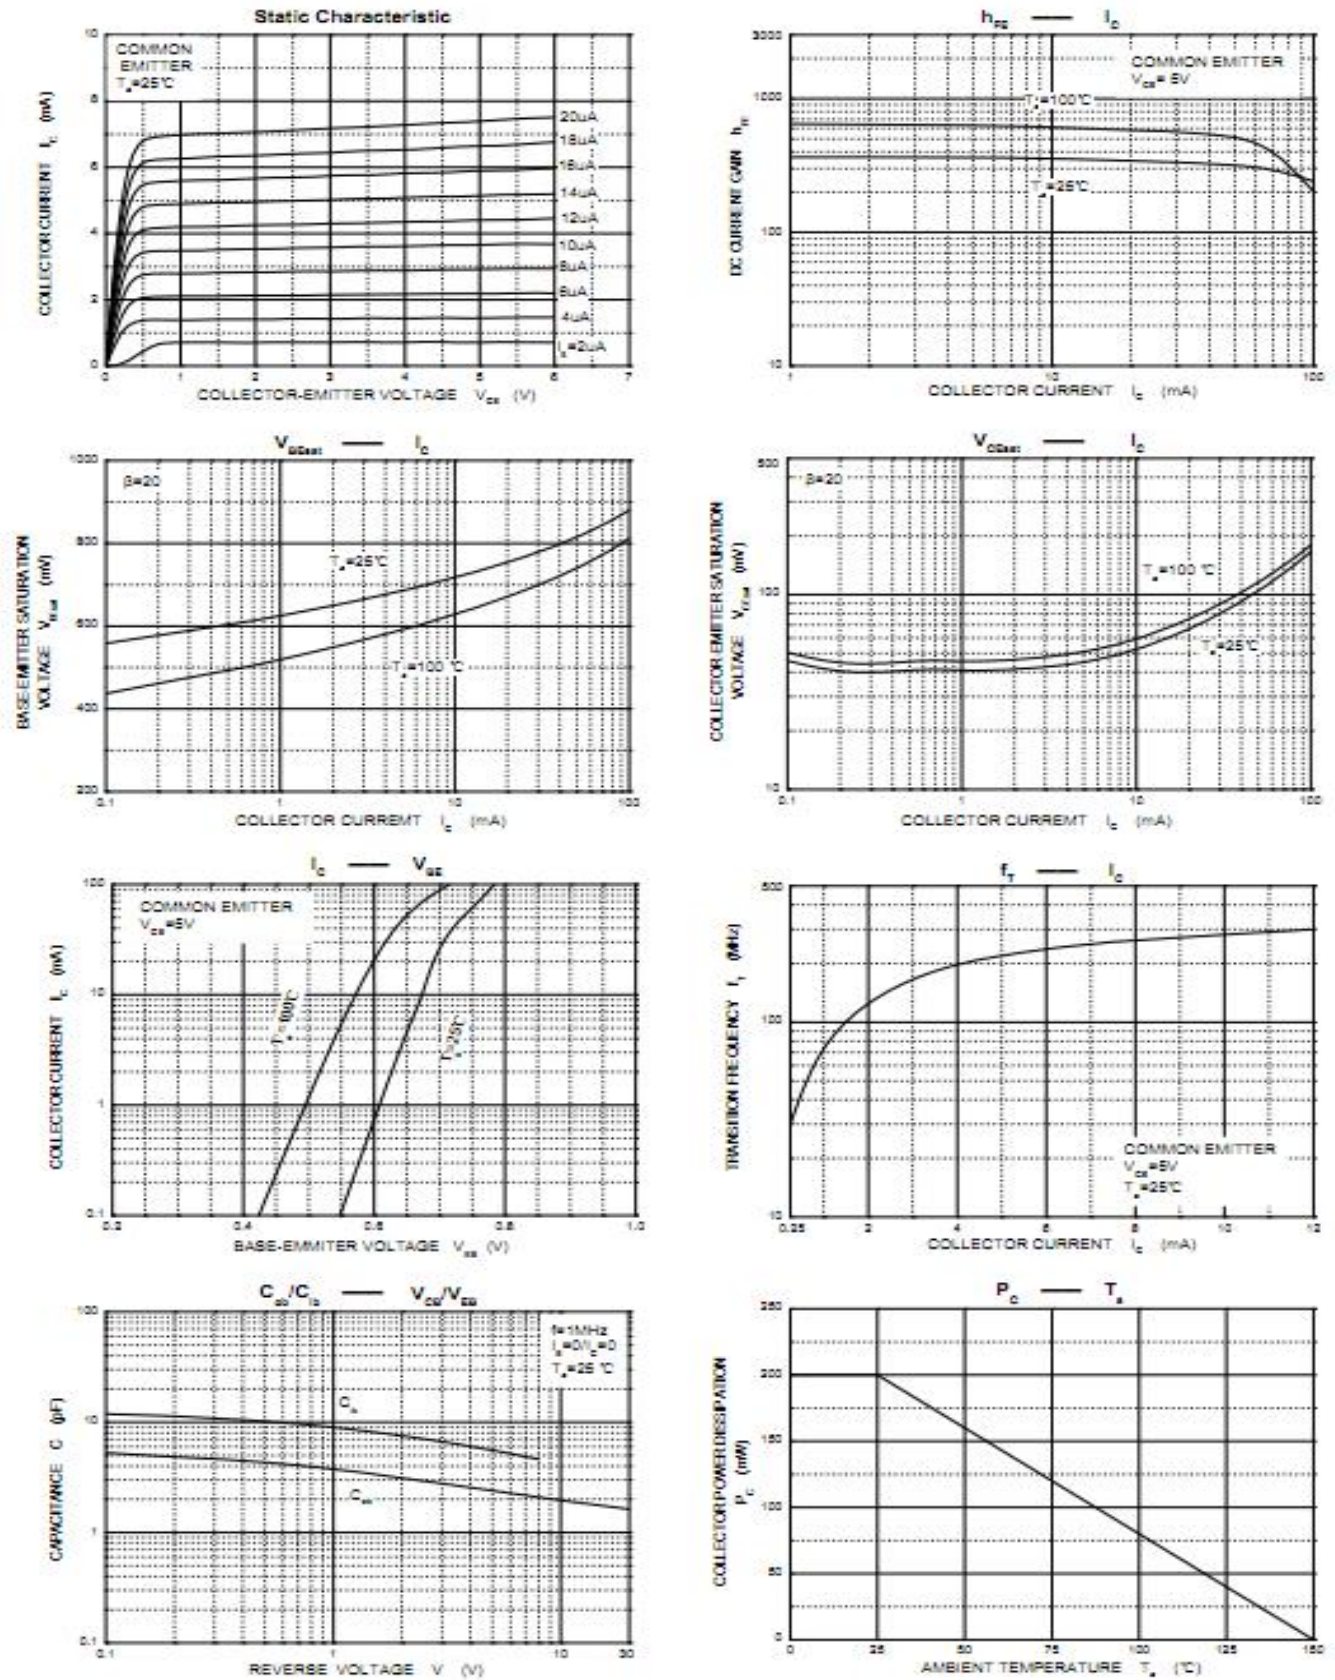

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Yongyutai Electronics manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)