

# S9014

## SOT-23 Plastic-Encapsulate Transistors

**S9014** TRANSISTOR (NPN)

**FEATURES**

Complimentary to S9015

**MARKING:**J6

**MAXIMUM RATINGS** (TA=25°C unless otherwise noted)



Symbol (符号)	Parameter (参数名称)	Value (额定值)	Units (单位)
<b>VCBO</b>	Collector-Base Voltage (集电极-基极电压)	50	V
<b>VCEO</b>	Collector-Emitter Voltage (集电极-发射极电压)	45	V
<b>VEBO</b>	Emitter-Base Voltage (发射极-基极电压)	5	V
<b>IC</b>	Collector Current -Continuous (集电极电流)	0.1	A
<b>PC</b>	Collector Power Dissipation (耗散功率)	0.2	W
<b>Tj</b>	Junction Temperature (结温)	150	°C
<b>Tstg</b>	Storage Temperature (储存温度)	-55-150	°C





**ELECTRICAL CHARACTERISTICS** (Tamb=25°C unless otherwise specified)

Parameter (参数名称)	Symbol (符号)	Test conditions (测试条件)	MIN (最小值)	TYP (典型值)	MAX (最大值)	UNIT (单位)
Collector-base breakdown voltage 集电极-基极击穿电压	V(BR)CBO	IC= 100μA, IE=0	50			V
Collector-emitter breakdown voltage 集电极-发射极击穿电压	V(BR)CEO	IC= 1mA, IB=0	45			V
Emitter-base breakdown voltage 发射极-基极击穿电压	V(BR)EBO	IE=100μA, IC=0	5			V
Collector cut-off current 集电极-基极截止电流	ICBO	VCB=50 V, IE=0			1	μ A
Collector cut-off current 集电极-发射极截止电流	ICEO	VCE=35V, IB=0			10	μ A
Emitter cut-off current 发射极-基极截止电流	IEBO	VEB=5V, IC=0			1	μ A
DC current gain 直流电流增益	hFE	VCE=5V, IC= 1mA	80		600	
Collector-emitter saturation voltage 集电极-发射极饱和压降	VCE(sat)	IC=100mA, IB= 5mA			0.3	V
Base-emitter saturation voltage 发射极-基极饱和压降	VBE(sat)	IC=100mA, IB= 5mA			1	V

**CLASSIFICATION OF hFE**

Range	80-200	200-400	300-400	400-600
-------	--------	---------	---------	---------

# Typical Characteristics

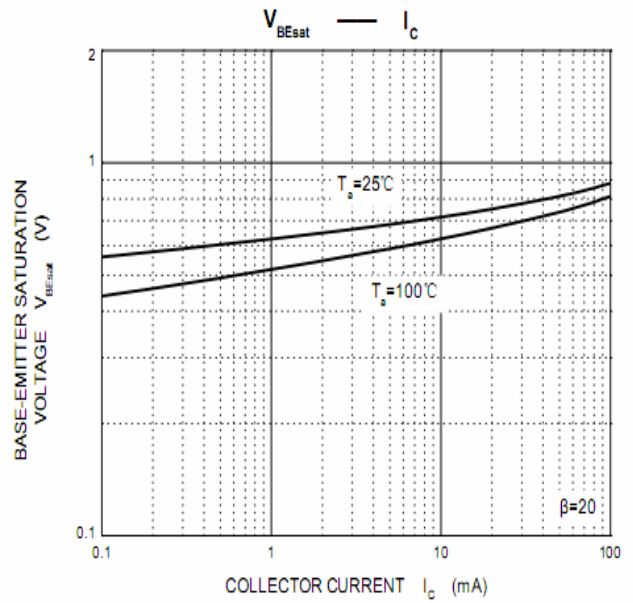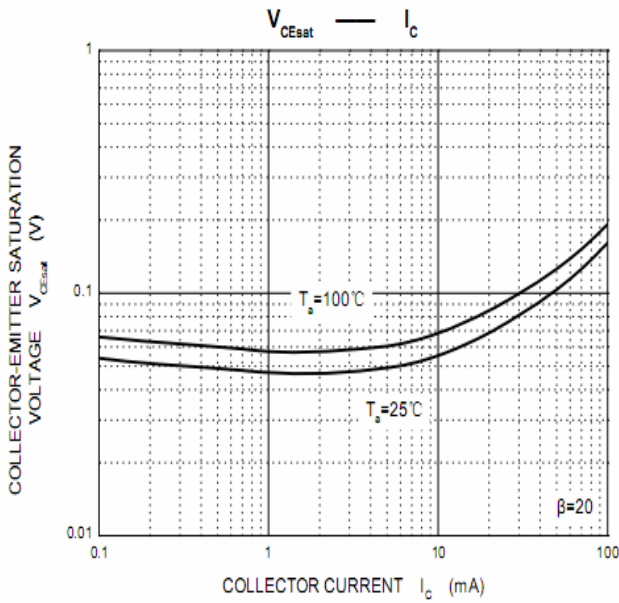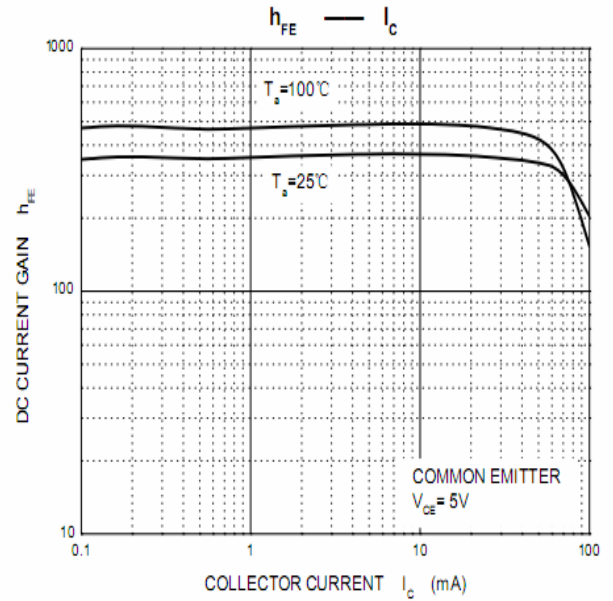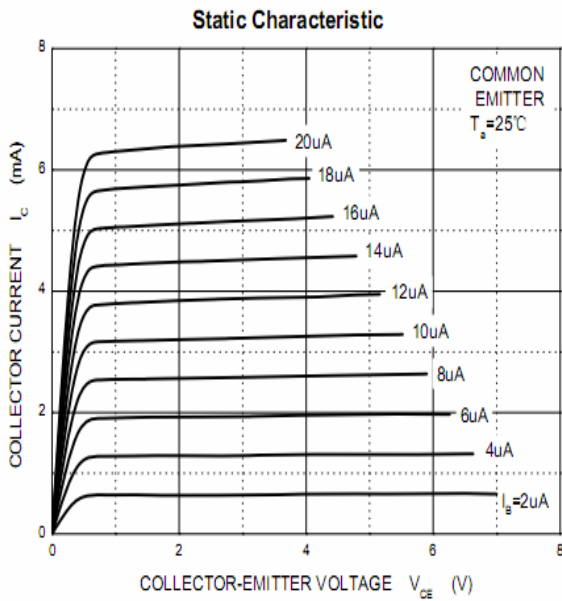

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Yongyutai Electronics manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)  
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)  
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)  
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)