


# HNC-200BS/C 系列霍尔电流传感器

△电气参数 (Ta=25°C)

型号		HNC-25BS/C	HNC-50BS/C	HNC-75BS/C	HNC-100BS/C	HNC-200BS/C
参数	符号					
额定测量电流	If	25A	50A	75A	100A	200A
线性范围	-	0~±50A	0~±75A	0~±105A	0~±150A	0~±250A
匝数比	-	1:1000	1:1000	1:1500	1:2000	1:2000
输出电流	Ih	25mA±1% at If	50mA±1% at If			100mA±1% at If
零电流失调	Io	±0.2 以内 at mA If=0				
线性误差	ρ	±0.25% 以内 of Ih at If=F.S				
电源电压	Vcc	±15V DC ±5%				
响应时间	Trr	1μs max				
输出温度特性	-	±0.04%/°C 以内 at If=F.S				
零点温漂	-	±0.01mA/°C 以内 at If=0		±0.02 mA/°C 以内 at If=0		
磁滞误差		±0.3 mA 以内 (If→0)				
推建负载电阻	RL	80 欧姆				40 欧姆
绝缘电压	-	2.5KV AC with 50 or 60Hz×1 minute				
绝缘强度	-	500MΩ Min at 500V DC				
工作温度	Ta	-10°C to +80°C				
存储温度	Ts	-15°C to +85°C				
注:						

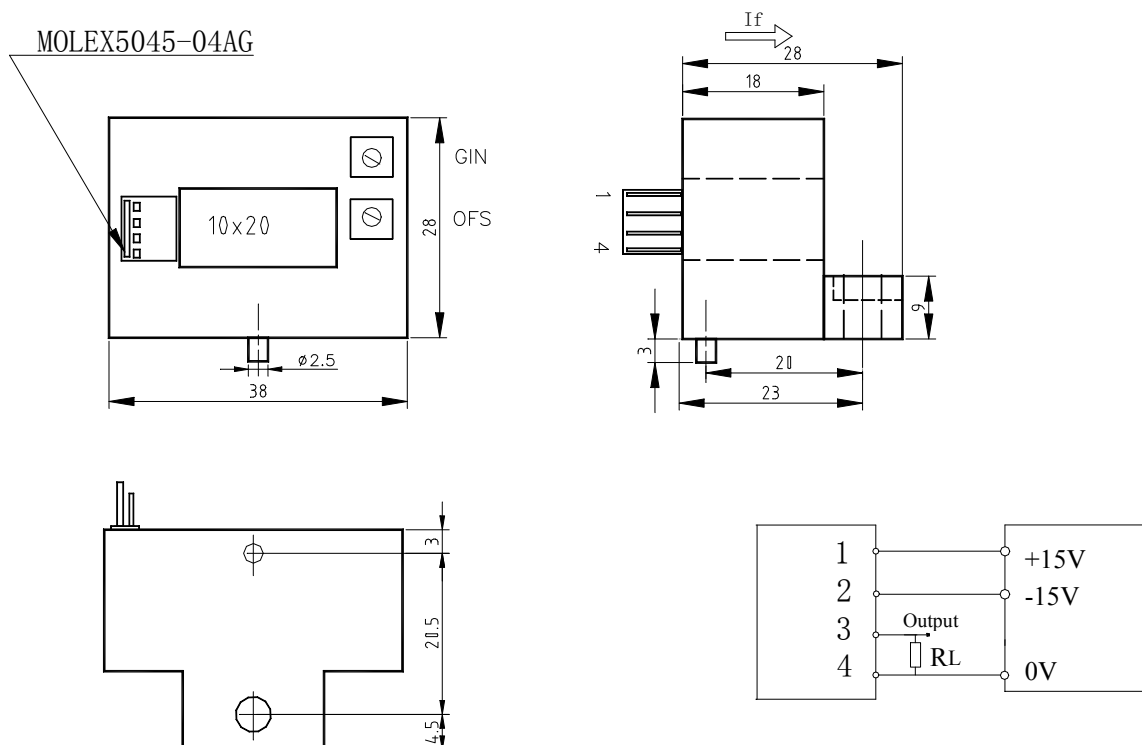

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [zhongxu manufacturer](#):*

Other Similar products are found below :

[HNC-100BS/C](#) [HNC-100LAP](#) [HDC-1000HAM](#) [HDC-1500HAM](#) [HDC-100HAM](#) [HDC-300HAM](#) [HDC-400HAM](#) [HDC-500HAM](#) [HDC-600HAM](#) [HNC-06LTS](#) [HNC-25LTS](#) [HNC-50AY](#) [HNC-10LX](#) [HNC-50LA](#) [HDC-200BN](#) [HNC-200BS/C](#) [HNC-025A](#) [HNC-03SY/C](#) [HNC-25AY](#) [HDC-500BN](#) [HNV-025A](#) [HDC-300LB](#) [HDC-600BS](#) [HNC-75LA](#) [HNC-20LX](#) [HNC-25LX](#) [HDC-40AY](#) [HDC-50AY](#) [HDC-60AY](#) [HDC-100BN](#) [HDC-300BN](#) [HDC-600BN](#) [HDC-50LB](#) [HDC-100LB](#) [HDC-100BS](#) [HDC-200BS](#) [HDC-300BS](#) [HNC-05LX](#) [HNC-10SY/C](#) [HNC-661](#) [HNC151-104](#) [HNC-10SYB](#) [HNC-662](#) [HNC-03SYB](#) [HDC-200LB](#) [HNC-50LAP](#) [HNC-25SYB](#) [HNC-15SY/C](#) [HNC-15LX](#) [HNC-25LA](#)