

ISSUE 1; July 2016

### Description

- Standard 2.5 x 2.0mm oscillator in a ceramic package with a hermetically sealed metal lid.



### Frequency Parameters

- Frequency: 1.0MHz to 50.0MHz
- Frequency Stability:  $\pm 20.00\text{ppm}$  to  $\pm 100.00\text{ppm}$
- Ageing:  $\pm 3\text{ppm}$  max per year

### Electrical Parameters

- Supply Voltage: 2.5V  $\pm 5\%$

### Operating Temperature Ranges

- 0 to 70°C
- 40 to 85°C

### Output Details

- Output Compatibility: HCMOS
- Drive Capability: 15pF
- Output Voltage High: 90% of VS min
- Output Voltage Low: 10% of VS max

### Output Control

- Standby Function (pin1):  
No Connection = Output Enabled  
>70% VS = Output Enabled  
<30% VS = Output Disabled  
(When disabled output goes to high impedance state)
- Start Up Time: 10ms max

### Noise Parameters

- Jitter (Period pk-pk):  $\pm 80\text{ps}$  typ
- Jitter (Period One Sigma):  $\pm 10\text{ps}$  typ
- Jitter (Phase 12kHz to 20MHz): 1ps max

### Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-202, Method 213. Or comparable.
- Vibration: MIL-STD-883, Method 2007. Or comparable.

### Compliance


- RoHS Status (2011/65/EU): Compliant
- REACH Status: Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

### Packaging Details

- Pack Style: Reel: Tape & reel in accordance with EIA-481D  
Pack Size: 3,000
- Pack Style: Bulk: Loose in bulk pack  
Pack Size: 1
- Pack Style: Cutt: In tape, cut from a reel  
Pack Size: 1

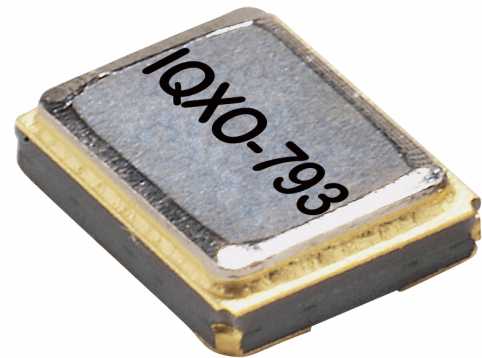

### Outline (mm)

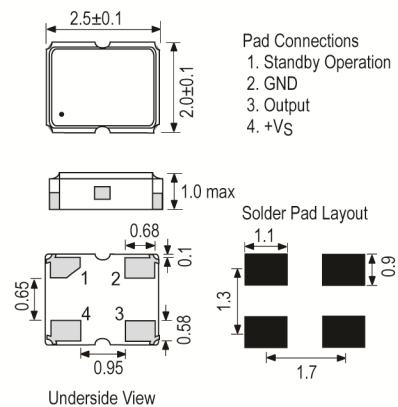

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Electrical Specification - maximum limiting values 2.5V  $\pm$ 5%

Frequency Min	Frequency Max	Temperature Range	Stability	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	50.0MHz	0 to 70 -40 to 85	$\pm$ 20.0 $\pm$ 50.0	10 10	10 10	40/60% 40/60%

*This document was correct at the time of printing; please contact your local sales office for the latest version.*  
[Click to view latest version on our website.](#)

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for IQD manufacturer:*

Other Similar products are found below :

[LFOCXO063803BULK](#) [LFSPXO056242CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063809BULK](#)  
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO063781BULK](#) [LFTCXO070028Cutt](#)  
[LFTVXO063701BULK](#) [LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFXTAL003215](#)  
[LFMCXO063766BULK](#) [LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#)  
[LFTCXO063716BULK](#) [LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#)  
[LFTVXO063790BULK](#) [LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [SPXO009437-CFPS-73](#) [LFSPXO009686Bulk](#)  
[LFSPXO023543Bulk](#) [LFOCXO067293Bulk](#) [LFMISC075710Bulk](#) [LFSPXO076024Cutt](#) [LFMCXO064079BULK](#) [LFOCXO067293](#)  
[LFMCXO064077BULK](#) [LFTVXO063785BULK](#) [LFXTAL012312BULK](#) [LFTCXO063780BULK](#) [LFXTAL003224](#) [LFSPXO009592CUTT](#)  
[LFPTXO000295Bulk](#) [LFMISC070550Bulk](#) [LFOCXO063802BULK](#) [LFMCXO064080BULK](#) [LFSPXO009615Bulk](#)