


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

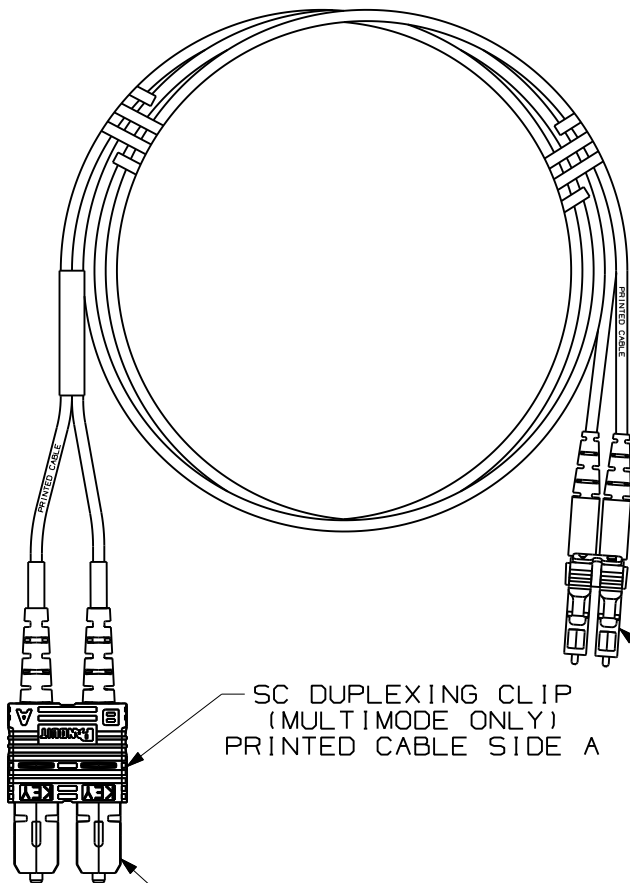

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA-568-C.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

SC DUPLEXING CLIP
(MULTIMODE ONLY)
PRINTED CABLE SIDE A


DUPLEXED LC CONNECTORS
PRINTED CABLE SIDE B

SC CONNECTORS

NETKEY FIBER OPTIC PATCH CORD
DUPLEX SC TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.010 (0.3)
(.XX) ±.03 (0.8) ANGLES

DRAWING FILENAME
M01302CT_DC/00B

SCALE
NONE

DRAWN BY
EFK

MATERIAL

PART NO. NKF•ERO2S-LM••
NKF•ELO2S-LM••

DATE
12-14-09

DRAWING NO.
01302-54
SHEET 1 OF 2
SIZE
A

CHK'D
WMA

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01	07-28-11	EFK	PJB	RELEASED TO PRODUCTION	01302-54		RWB		

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


DUPLEX SC TO LC FIBER OPTIC PATCH CORD

PANDUIT PART NUMBER	LENGTH (**) M = METERS	CABLE				CONNECTORS		
		FIBER TYPE	COUNT	RATING	COLOR	BOOT COLOR	MAX. IL	MIN. RL
NKF6ERO2S-LM**	01, 02, 03, 05, 10	62.5/125 OM1	DUPLEX 1.6mm ZIPCORD	RISER (OFNR)	ORANGE	WHITE	0.75dB	26dB
NKF5ERO2S-LM**		50/125 OM2			BLACK			
NKFXERO2S-LM**		50/125 OM3			AQUA	AQUA		
NKF9ERO2S-LM**		SINGLEMODE OS1			YELLOW	WHITE		
NKF6ELO2S-LM**		62.5/125 OM1		LOW SMOKE ZERO HALOGEN (LSZH)	ORANGE	WHITE	0.75dB	26dB
NKF5ELO2S-LM**		50/125 OM2			BLACK			
NKFXELO2S-LM**		50/125 OM3			AQUA	AQUA		
NKF9ELO2S-LM**		SINGLEMODE OS1			YELLOW	WHITE		

NETKEY FIBER OPTIC PATCH CORD
DUPLEX SC TO LC CONFIGURATION
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 | (.XXX) ±.010 | (.3) ±.03 | (.8) ANGLES

DRAWING FILENAME
M01302CT_DC/00B

SCALE
NONE

DRAWN BY
EFK

MATERIAL

PART NO.
NKF•ERO2S-LM••
NKF•ELO2S-LM••

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01	07-28-11	EFK	PJB	RELEASED TO PRODUCTION	01302-54		RWB		

DATE
12-14-09
CHK'D
WMA

DRAWING NO.
01302-54
SHEET 2 OF 2

SIZE
A