

CEM130 NEW

COM Express Type 6 Compact Module with AMD Ryzen™ Embedded V1000 Processor

Features

- AMD Ryzen™ Embedded V1000 processors
- 2 DDR-2400/3200 SO-DIMM for up to 64GB of memory
- Max. up to 7 lanes of PCI Express
- 2 SATA-600
- 3 USB 3.0 and 8 USB 2.0
- TPM 2.0 supported
- Wide voltage input from +8V to +20V




Core System

CPU	AMD Ryzen™ Embedded V1000 series V1202B / 2.3 GHz (12-25W) V1605B / 2.0 GHz (12-25W) V1756B / 3.25 GHz (35-54W) V1807B / 3.35 GHz (35-54W)
System Memory	2 x DDR4-2400/3200 SO-DIMM, up to 64GB (dual channel)*, non-ECC/ECC memory *Memory speed was depend on memory rank.
Chipset	SoC integrated
BIOS	AMI uEFI (Legacy free)
Storage	N/A
Watchdog Timer	65536 levels, 0 to 65535 sec.
Expansion Interface	7 x PCIe x1 via PCIe bridge
Battery Lithium	N/A
Power Input	ATX: +12V, +5VSB AT: +12V Wide range input: +8V to +20V
Dimensions	95 x 95 mm
Board Thickness	2.0 mm
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Humidity	10% - 95% relative humidity, non-condensing

*Memory speed was depend on memory rank.

I/O

SATA	2 x SATA-600
Hardware Monitoring	Yes
Ethernet	1 x 10/100/1000 Mbps Ethernet with Intel® i210; supports Wake-on-LAN, PXE Boot ROM
Audio	HD link interface to baseboard for Codec
USB	3 x USB 3.0 8 x USB 2.0
Serial	1 x LPC 1 x SPI 2 x TX/RX
TPM	TPM 2.0
SMBus	Yes
Others	1 x I ² C
GPIO	4-CH in & 4-CH out
Smart Battery	Yes

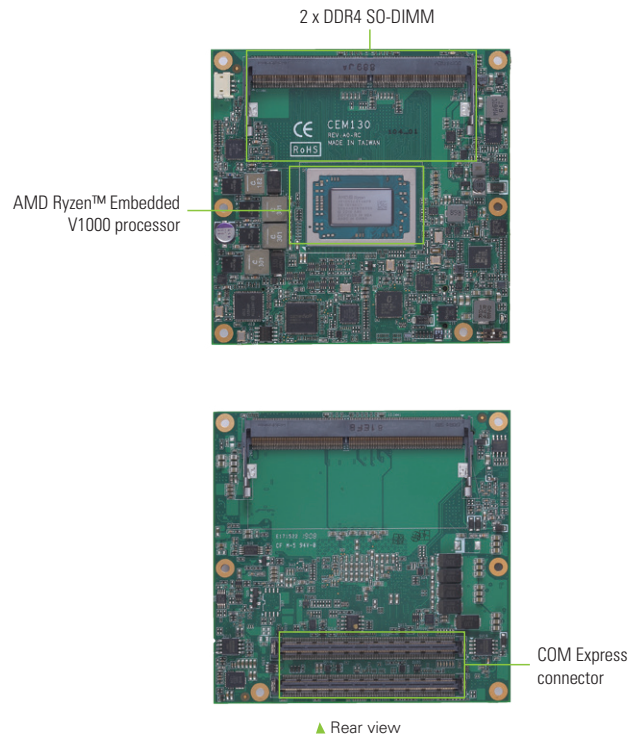

Display

Graphic	Radeon™ RX Vega Graphics with up to 11 compute units H.265 (10-bit) decode & (8-bit) encode, VP9 decode
Display Interface	1 x VGA; 1920 x 1200 @60Hz 1 x LVDS dual-channel 18/24-bit or eDP 1.3 (optional) 2 x DDI (HDMI 1.4, DVI, DisplayPort 1.2)*

*HDMI 2.0 needs redriver chip on carrier board/DisplayPort 1.4 needs Redriver chip on carrier board

Packing List

Quick installation guide

Ordering Information

Standard	
CEM130-V1202B (P/N: E38D130103)	COM Express Type 6 Compact module with AMD Ryzen™ Embedded V1202B, DDI, LVDS, GbE LAN, USB 3.0 and TPM
CEM130-V1605B (P/N: E38D130102)	COM Express Type 6 Compact module with AMD Ryzen™ Embedded V1605B, DDI, LVDS, GbE LAN, USB 3.0 and TPM
CEM130-V1756B (P/N: E38D130101)	COM Express Type 6 Compact module with AMD Ryzen™ Embedded V1756B, DDI, LVDS, GbE LAN, USB 3.0 and TPM
CEM130-V1807B (P/N: E38D130100)	COM Express Type 6 Compact module with AMD Ryzen™ Embedded V1807B, DDI, LVDS, GbE LAN, USB 3.0 and TPM
Optional	
CEB94011 (P/N: E39A011100)	COM Express Type 6 application board
E39J014100	CEM130 heat sink with fan
7128D130000E	CEM130 heat spreader

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Sinks](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[581102B00000G](#) [656-15ABPE](#) [657-20ABPNE](#) [7020B-TC12-MTG](#) [73452PPBA](#) [7G0011A](#) [PF720G](#) [A22-4026](#) [120-1873-007](#) [HAH10L](#)
[HAH15L](#) [1542616-1](#) [HS-2506-F1](#) [HS-87M0-F2](#) [218-40CTE3](#) [231-69PAB-15V](#) [25-7520](#) [SW50-4G](#) [231-75PAB-13V](#) [231-75PAB-15V](#) [253-](#)
[122ABE-22](#) [PSC22CB](#) [HAF10L](#) [HAQ10T](#) [D10100-28](#) [BDN183CBA01](#) [3-21053-4](#) [32438](#) [TX0506-1B](#) [TX1806B](#) [LAE66A3CB](#) [WA-DT2-](#)
[101E](#) [511-3U](#) [73381PPBA](#) [73403PPBA](#) [7G0047C](#) [COMX-440-HSP](#) [510-12M](#) [D10650-40T5](#) [V8511 Y](#) [APF40-40-13CB/A01](#)
[780653U04500G](#) [ATS-54310K-C2-R0](#) [FK 216 CB SA](#) [FK 231 SA 220](#) [648-51AB](#) [657-20ABPESC](#) [2341BG](#) [679-25AG](#) [FK 212 CB SA](#)