
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	DIMENSIONS in. [mm]			
		L± .02	B DIA.± .01	C± .01	
ES18B	#22-18 [0,5-1,0]	.62 [15,7]	.14 [3,6]	.032 [0,8]]	
ES14B	#16-14 [1,5-2,5]	.62 [15,7]	.16 [4,1]	.032 [0,8]]	
ES10B	#12-10 [4,0-6,0]	.63 [16,0]	.22 [5,6]	.040 [1,02]	

NOTES:

- 1. USED FOR:
 - A. SOLID OR STRANDED COPPER WIRE
 - B. 302°F [150°C] MAX TEMPERATURE RATING
 - C. 2000V MAX VOLTAGE
- 2. INSTALLATION TOOLS:
 - A. UL LISTED AND CSA CERTIFIED: CT-100A, CT-200, CT-600A (CT-570CH), CT-1570, CT-2500(CT-2570CH)
 - B. PANDUIT APPROVED: CT-160, CT-260
- 3. WIRE STRIP LENGTH: $9/32^{"}$ $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]
- 4. MATERIAL: COPPER, TIN PLATED
- 5. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- 6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

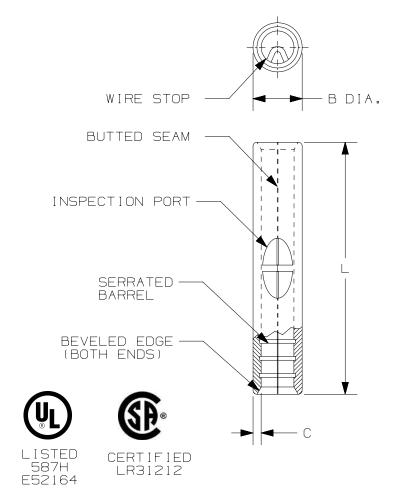

ŀ								TITLE
								STRONGHOLD BUTT SPLICE
4 [NON-INSULATED, BUTTED SEAM #22-10 AWG
								CUSTOMER DRAWING
								O0123SHB/00
-								00123SHB/00 DATASET FILE NAME 00123SHB_DC/00A
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
								.x : .1 [2.54] .xx : .005 [.13] SEE NOTES
JA/12	00	10.5.17	TMR	JHNU	RGB	DRAWING RELEASED	00123SH	THIRD ANGLE PROJECTION SH41338
D10100D/	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE CHK SCALE TMR 10.5.17 JHNU N.T.S SHEET 1 0F 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

HT-13-10 71M-250-32-NB 01-2065-1-0216 00581P0075 M10-10RX M10BCK 60205-1 604200-1 60598-1-CUT-TAPE 60617-1-C 60873
1 M14-516R/SK M14-6RSX M18-10FLX M18-8FBX M18-8R/LX M18BCK 61314-6-C 61-S 61-SN-A 62-NBM-A 63-S 640179-1

640917-2-CUT-TAPE 6501550002 66107-2-C 696683-1 696834-1 696861-1 696931-1 696999-1 M8-516RK M86700006

MA250DMFMX-A 701-2007 701-2307 701-7761-03 70F-110-32-PB 718-N-A 71M-187-20-NBL 71M-250-32-NBL 72F-187-20-NBL

72M-250-32-NBL 7310 73F-250-32 73F-250-32-NBL 73F-250-32-NL F14-10C F-1M 751-250