

SPECIFICATION

POLE-POSITION : 1 pole, 2 position ~ 8 position
(STOP LESS) are available

ELECTRICAL RATING : 0.5A 24V DC ; 0.2A 48V DC

CONTACT RESISTANCE : 100mΩ Max.

INSULATION RESISTANCE : 100MΩ min. 500V DC

DIELECTRIC STRENGTH : Breakdown is not allowable ;
500V AC for 1 minute

OPERATING FORCE : 350 ± 150 g

OPERATING LIFE : 2,000 cycles

OPERATING TEMPERATURE RANGE : - 20°C ~ 70°C


MATERIAL

HOUSING : NYLON 6/6

BASE : LCP

ACTUATOR : NYLON 6/6

TERMINAL : Brass gold plating




HOW TO ORDER

Rotation	Number of Positions	Travel	Part Number
No Stop Continuous Rotation	OFF, 1,2,3,4,5,6,7	360°	RT-0C8
" OFF " In Extreme Anti-Clockwise Position (Position 1)	OFF, 1,2,3,4,5,6,7	315°	RT-0C7
	OFF, 1,2,3,4,5,6	270°	RT-0C6
	OFF, 1,2,3,4,5	225°	RT-0C5
	OFF, 1,2,3,4	180°	RT-0C4
	OFF, 1,2,3	135°	RT-0C3
	OFF, 1,2	90°	RT-0C2
	OFF, 1	45°	RT-0C1



Rotation	Number of Positions	Travel	Part Number
NOTE: Start position is 45° clockwise different form RT-001,RT-0C□ types			
" OFF " In Extreme Clockwise Position (Position 8)	1,2,3,4,5,6,7,OFF	315°	RT-008
	1,2,3,4,5,6,7	270°	RT-007
	1,2,3,4,5,6	225°	RT-006
	1,2,3,4,5	180°	RT-005
	1,2,3,4	135°	RT-004
	1,2,3	90°	RT-003
	1,2	45°	RT-002

▲ Please kindly note our standard is with .307(7.80) Acuator. If you need .098(2.50) Acuator, please add "D" after part number.


DIMENSION

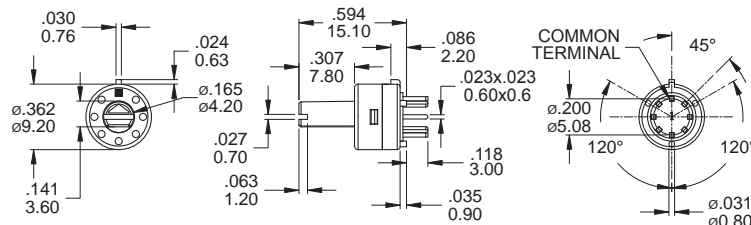

Part No. Shown : RT-0C8

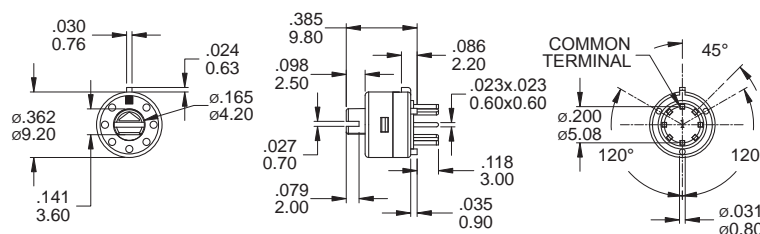

Part No. Shown : RT-0C8-D



RT
Rotary Switches

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rotary Switches](#) category:

Click to view products by [Dailywell](#) manufacturer:

Other Similar products are found below :

[57HS22-02-2-06N](#) [57M22-02B16N](#) [57M22-09A16N](#) [M3786/4-0881](#) [M3786/4-3267](#) [M3786/4-5568](#) [M3786/4-6029](#) [71ESF30-05204N](#)
[MC06L1NCGF](#) [84986-26](#) [9003K2C003GA](#) [PLR3251](#) [PLR3262](#) [PS3](#) [A0142M2SP](#) [A019605](#) [A029303](#) [R2AA4455NNNN](#)
[R2BB4455NNNN](#) [DR75-AMSF-10R-B](#) [14-520.0360](#) [1703.3201](#) [HW1MS-0202-101](#) [24002-03S](#) [A029101](#) [ACSNO-129-YB-C1014](#) [ACSNO-](#)
[134-RR-YB-C1005](#) [ACSNO-353-SB-C3016](#) [1825537-4](#) [T505](#) [T505E](#) [24005-03N](#) [H10207RR01Q](#) [M3786/4-0002](#) [M3786/4-0630](#) [M3786/4-](#)
[1028L](#) [M3786/4-1233L](#) [M3786/4-3044](#) [M3786/4-3129](#) [M3786/4-5008L](#) [M3786/4-5256](#) [MC6CX1A502X009](#) [42HS36-01-1-06N](#) [42P36-](#)
[03B10S](#) [44MBS60-04-2-03N](#) [44MG90-02-1-02N](#) [50KMT90-01-2-02N](#) [51A22-01-1-16S](#) [51CDP30-01PAJN](#) [51KSP30-01D04N](#)