


# STATSHIELD® METAL-OUT SERIES

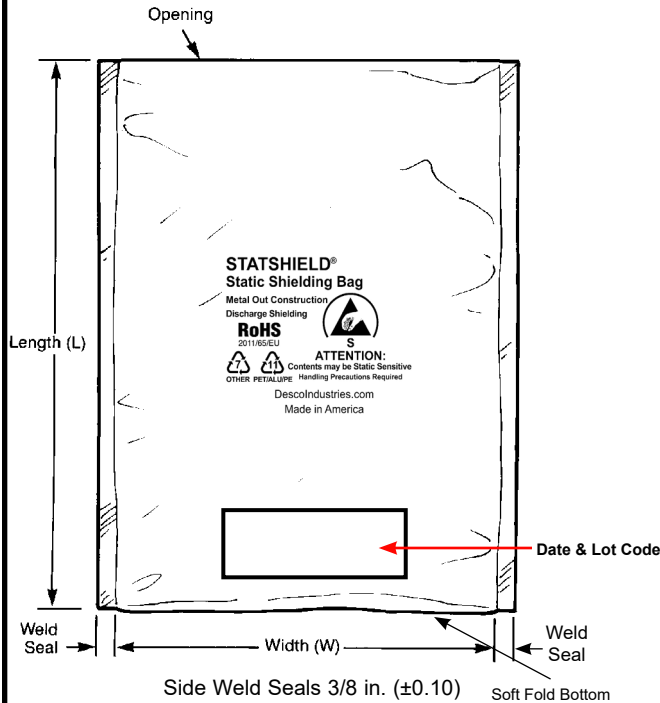

## Specifications:

### Standard Document

ANSI/ESD S541 (ANSI/ESD S20.20)  
ANSI/ESD S11.4

### Electrical Properties

Surface Resistance:  
Outer Surface  
Inner Surface  
Discharge Shielding  
Charge Generation

### Typical Values

$1 \times 10^4$  to  $< 1 \times 10^8$  ohms  
 $1 \times 10^4$  to  $< 1 \times 10^{11}$  ohms  
<20 nJ  
Teflon: -0.03 nC/sq. in.  
Quartz: +0.10 nC/sq. in.  
<30 volts

Capacitance Probe (to dissipate 1 KV)

### Physical Properties:

Film Thickness  
Width (Inside Dimensions)  
Length (Inside Dimensions)  
Light Transmission  
Puncture Resistance  
Heat Seal  
Non-corrosive  
Silicone  
Marking Adhesion

Nominal 3.0 mil (0.07mm)  $\pm 10\%$   
Nominal -0" / + 0.250"  
Nominal  $\pm 0.125$ ", Offset 0 to 1/4"  
40% (Tobias)  
>10 lbs  
>10 lbs/in.  
Pass  
Not detected  
Pass

### Meets Requirements of:

ESD Protective Packaging  
Level 3 Technical Requirements

### Test Procedures/Method

ANSI/ESD STM11.11  
ANSI/ESD STM11.11  
ANSI/ESD STM11.31, EIA 541  
Modified Incline Plane  
Modified Incline Plane  
ANSI/EIA-541/Appendix E, 1kV Discharge

MIL-STD-3010, 1003

ASTM D-1003  
MIL-STD-3010, 2065  
375°F, 1/2 sec 60 psi  
MIL-STD-3010, M3005  
FTIR  
IPC-TM-650 2.4.1

### ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

1. Low charge generation
2. Dissipative or conductive materials for intimate contact
3. A structure that provides electrostatic discharge shielding."

### RoHS, REACH and Conflict Minerals Statement

See the Desco Industries RoHS, REACH, and Conflict Minerals Statement:

[https://desco.descoindustries.com/pdf/Regulatory\\_Statements\\_Desco\\_Statshield\\_Bags.pdf](https://desco.descoindustries.com/pdf/Regulatory_Statements_Desco_Statshield_Bags.pdf)

See the Desco Limited Warranty:

[Desco.DescoIndustries.com/Limited-Warranty.aspx](https://Desco.DescoIndustries.com/Limited-Warranty.aspx)

High Performance Static  
Dissipative Abrasion  
Resistant Coating

Aluminum  
Shielding Layer

Low Charging Static  
Dissipative Proprietary  
Polyester Layer

Low Charging Static  
Dissipative Proprietary  
Inner Polyethylene Layer

### Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

**Desco's bags are recyclable**



Statshield® bags are packaged 100 per package in an oversized shielding bag.  
See Shielding Bag Storage at [TB-7507](#).

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.  
See Bag Selection Chart Click [HERE](#)



Made in the  
United States of America

Specifications and procedures subject to change without notice.

## STATSHIELD® BAG, SHIELDING, METAL-OUT CONSTRUCTION, 3.0 MIL (0.07mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](https://Desco.com)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

**DRAWING  
NUMBER**  
13010

**DATE:**  
September  
2021

# DESCO

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antistatic Control Products](#) category:*

*Click to view products by [Desco](#) manufacturer:*

Other Similar products are found below :

[13020](#) [13490](#) [13870](#) [13879](#) [13881](#) [13883](#) [13882](#) [14404](#) [2202SP](#) [3039](#) [37061](#) [42470](#) [09060](#) [09857](#) [42516](#) [37059](#) [04563](#) [17252](#) [19691](#)  
[19695](#) [09037](#) [09826](#) [09813](#) [66070](#) [100816](#) [68101](#) [68103](#) [98132](#) [73741](#) [13868](#) [13485](#) [13457](#) [13245](#) [13468](#) [13420](#) [13332](#) [13205](#) [13135](#)  
[91070](#) [8031](#) [8523](#) [66085](#) [40931](#) [37081](#) [13080](#) [13215](#) [13806](#) [73749](#) [010-0225](#) [17260](#)