



# VHBCC






L (μH)	Ø D max
47	6.3
10 - 33 & 68 - 100000	6.0



Fixed Choke Coils

Leaded Inductors

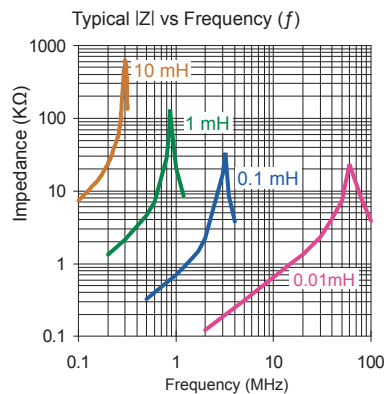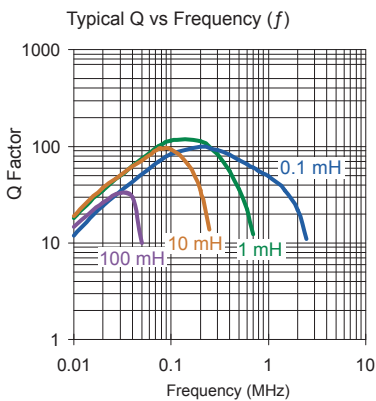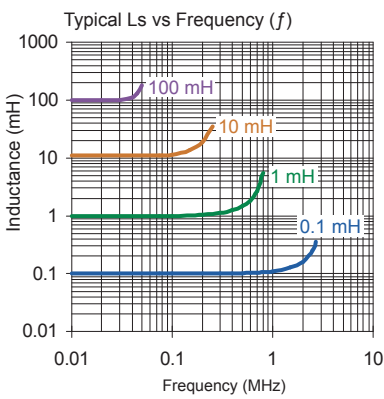

Part No	Inductance L (μH)	f <sub>L</sub> (kHz)	Tol ± (%)	Q min	f <sub>Q</sub> (kHz)	SRF min (MHz)	DCR max (Ω)	Rated DC Current (mA)	
								I <sub>1</sub>	I <sub>sat</sub>
VHBCC-100X-YY	10	1000	<b>5,10</b>	55	2520	38	0.09	2900	4600
VHBCC-150X-YY	15	100	<b>5,10</b>	55	2520	36	0.13	2250	3800
VHBCC-220X-YY	22	100	<b>5,10</b>	50	2520	15	0.15	2030	3100
VHBCC-330X-YY	33	100	<b>5,10</b>	35	2520	5.2	0.16	1980	2550
VHBCC-470X-YY	47	100	<b>5,10</b>	30	2520	4.8	0.18	1800	2100
VHBCC-680X-YY	68	100	<b>5,10</b>	20	2520	3.8	0.25	1620	1790
VHBCC-101X-YY	100	100	<b>5,10</b>	40	796	2.5	0.62	1060	1490
VHBCC-151X-YY	150	100	<b>5,10</b>	35	796	2.0	0.80	960	1210
VHBCC-181X-YY	180	100	<b>5,10</b>	35	796	1.6	0.85	690	1000
VHBCC-221X-YY	220	100	<b>5,10</b>	35	796	1.6	1.2	690	900
VHBCC-331X-YY	330	100	<b>5,10</b>	25	796	1.4	1.4	630	735
VHBCC-391X-YY	390	100	<b>5,10</b>	25	796	1.3	1.6	590	675
VHBCC-471X-YY	470	100	<b>5,10</b>	20	796	1.2	1.8	550	630
VHBCC-561X-YY	560	100	<b>5,10</b>	15	796	1.06	2.3	525	610
VHBCC-681X-YY	680	100	<b>5,10</b>	15	796	0.92	2.6	500	590
VHBCC-821X-YY	820	100	<b>5,10</b>	70	252	0.72	4.2	448	550
VHBCC-102X-YY	1000	100	<b>5,10</b>	70	252	0.72	4.2	400	490
VHBCC-122X-YY	1200	100	<b>5,10</b>	70	252	0.68	5.5	350	448
VHBCC-152X-YY	1500	100	<b>5,10</b>	70	252	0.65	6	320	400
VHBCC-182X-YY	1800	100	<b>5,10</b>	70	252	0.65	6	300	410
VHBCC-222X-YY	2200	100	<b>5,10</b>	65	252	0.50	10	250	340
VHBCC-272X-YY	2700	100	<b>5,10</b>	50	252	0.42	12	243	298
VHBCC-332X-YY	3300	100	<b>5,10</b>	50	252	0.42	12	220	270
VHBCC-392X-YY	3900	100	<b>5,10</b>	30	252	0.29	18	200	245
VHBCC-472X-YY	4700	100	<b>5,10</b>	30	252	0.31	18	200	220
VHBCC-562X-YY	5600	10	<b>5,10</b>	60	79.6	0.30	26	160	200
VHBCC-682X-YY	6800	10	<b>5,10</b>	60	79.6	0.29	24	150	180
VHBCC-822X-YY	8200	10	<b>5,10</b>	60	79.6	0.22	35	135	165
VHBCC-103X-YY	10000	10	<b>5,10</b>	60	79.6	0.20	40	120	150
VHBCC-123X-YY	12000	10	<b>5,10</b>	55	79.6	0.17	63	112	134
VHBCC-153X-YY	15000	10	<b>5,10</b>	55	79.6	0.17	63	100	120
VHBCC-183X-YY	18000	10	<b>5,10</b>	50	79.6	0.16	90	86	110
VHBCC-223X-YY	22000	10	<b>5,10</b>	50	79.6	0.15	100	82	100
VHBCC-273X-YY	27000	10	<b>5,10</b>	50	79.6	0.14	130	75	95
VHBCC-333X-YY	33000	10	<b>5,10</b>	50	79.6	0.14	130	67	85
* VHBCC-473X-YY	47000	10	<b>5,10</b>	30	25.2	0.09	220	53	73
* VHBCC-683X-YY	68000	10	<b>5,10</b>	25	25.2	0.08	270	49	59
* VHBCC-104X-YY	100000	10	<b>5,10</b>	20	25.2	0.06	490	34	45

Core Material : Ferrite

Revision date : 23 May 2017

SPQ :	Packing Form	Taped / Reel	Taped / Ammo pack
	Axial	1200 [-01]	500 [-02]

Remarks : - I<sub>1</sub> & I<sub>sat</sub> - see description in Technical Data  
- \* The inductance does not comply to IEC standard.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Fastron](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)  
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)  
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)  
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)  
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)  
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)