

# Transient Voltage Suppressors


for ESD Protection

## Features

- Low clamping voltage
- Low leakage

## PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

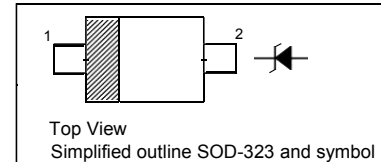

## Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )


Parameter	Symbol	Value	Unit
Peak Pulse Power ( $t_p = 8/20\ \mu\text{s}$ )	$P_{pk}$	350	W
Peak Pulse Current ( $t_p = 8/20\ \mu\text{s}$ )	$I_{pp}$	24	A
ESD Voltage (HRB Waveform per IEC61000-4-2)	$V_{pp}$	30	KV
Operating Junction Temperature	$T_j$	- 55 to + 125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$ ( $V_F = 0.9\text{ V Max.}$ at $I_F = 10\text{ mA}$ )


Type	Marking Code	Reverse Stand-off Voltage	Reverse Current	Breakdown Voltage		Clamping Voltage <sup>1)</sup>				Capacitance	
		$V_{RWM}$	$I_R$ at $V_{RWM}$	$V_{BR}$	at $I_T$	$V_C$	at $I_{PP}$	$V_C$	at $I_{PP}$	$C_j$	at f
		Max. (V)	Max. ( $\mu\text{A}$ )	Min. (V)	mA	Max. (V)	A	Max. (V)	A	Max. (pF)	MHz
ESD3Z2V5	2-	2.5	5	4	1	6.5	5	10.9	11	145	1
ESD3Z3V3	3-	3.3	10	5	1	8.4	5	14.1	16	105	1
ESD3Z5V0	5-	5	10	6	1	9.8	5	14.5	24	350	1
ESD3Z6V0	6-	6	5	6.8	1	12.4	5	20.5	8.8	70	1
ESD3Z7V0	7-	7	1	7.5	1	13.5	5	22.7	8.8	65	1
ESD3Z12	12-	12	1	13.3	1	19	5	25	15	150	1

<sup>1)</sup>  $t_p = 8/20\ \mu\text{s}$


**Non-Repetitive Peak Pulse Power vs. Pulse Time**

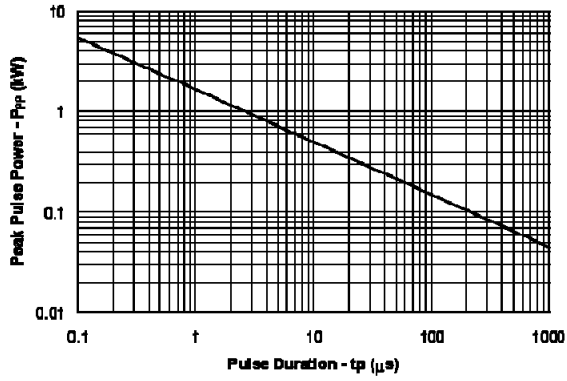


**Power Derating Curve**

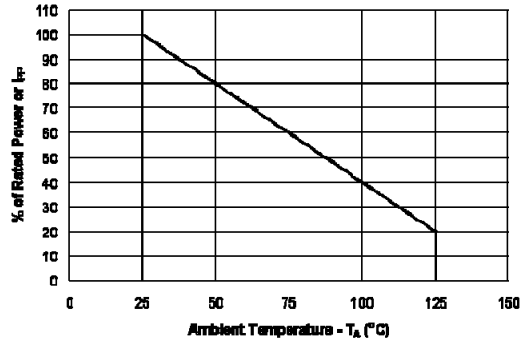

**Pulse Waveform**

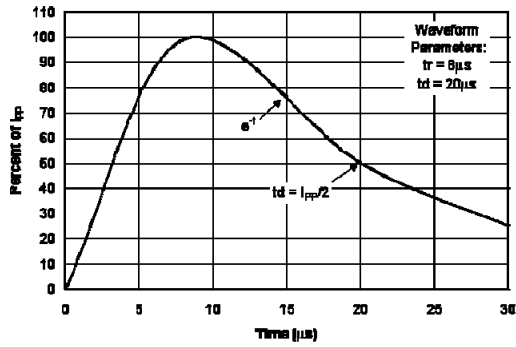

**Clamping Voltage vs. Peak Pulse Current**

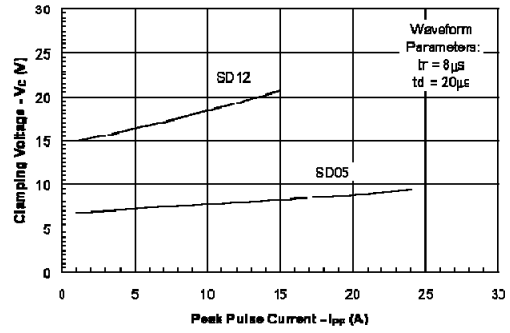

## **PACKAGE OUTLINE**

**Plastic surface mounted package; 2 leads**

**SOD-323**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Hong Kong Chuangji](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)