



尺寸 Dimensions

Table with columns for WV, CAP(μF), and voltage ratings (63V, 100V, 160V, 200V, 250V, 350V) with sub-columns for Size and Ripple.

Table with columns for WV, CAP(μF), and voltage ratings (400V, 450V, 500V) with sub-columns for Size and Ripple.

Size φD×L(mm) Maximum Allowable Ripple Current (mA rms) at 85°C 120Hz

KM 系列 Series

特点 Features

- 宽温度产品, 105°C, 1000小时寿命, 体积小, 容量大. Wide temperature range, 105°C, Load life: 1000 hours, small size, large capacity.
适用于开关电源、适配器、DVD、背投影电、空调等线路中。 Used in Smpls, Adapter, DVD, color-TV, air conditioning circuits etc.
RoHS指令已对应完毕。 Adapted to the RoHS directive.



主要技术性能 Specifications

Table with columns for Items and Characteristics, containing detailed technical specifications for operating temperature, voltage range, capacitance, leakage current, and dissipation factor.

外形图及尺寸表 Case Size Table

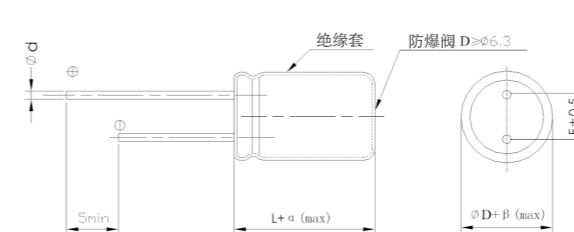


Table with columns for dimensions (D, F, d) and parameters (αMAX, βMAX) with corresponding values for different capacitor sizes.



频率修正系数 Frequency Coefficient

Rated Voltage(V)	Freq.(Hz)		50	120	300	1K	10K	100K
	CAP(μF)							
6.3~100	~47		0.75	1.00	1.35	1.57	2.00	2.30
	100~470		0.80	1.00	1.23	1.34	1.50	1.65
	≥560		0.85	1.00	1.10	1.13	1.15	1.40
160~450	0.47~4.7		0.65	1.00	1.35	1.75	2.30	2.50
	6.8~82		0.75	1.00	1.25	1.50	1.75	1.80
	≥100		0.80	1.00	1.15	1.30	1.40	1.50

尺寸 Dimensions

CAP(μF)	WV	6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1											5×11	3
0.22	R22											5×11	4
0.33	R33											5×11	5
0.47	R47											5×11	6
1	010											5×11	13
2.2	2R2											5×11	20
3.3	3R3											5×11	30
4.7	4R7					5×11	20	5×11	20			5×11	40
10	100	5×11	20			5×11	35	5×11	40	5×11	40	5×11	55
22	220			5×11	50	5×11	55	5×11	60	5×11	65	5×11	80
33	330	5×11	55	5×11	60	5×11	65	5×11	75	5×11	80	5×11	100
												6.3×11	115
47	470	5×11	65	5×11	70	5×11	80	5×11	85	5×11	100	6.3×11	135
												8×11.5	160
100	101	5×11	95	5×11	105	5×11	125	6.3×11	160	6.3×11	170	8×11.5	230
								6.3×11	140		8×11.5	200	
220	221	5×11	150	6.3×11	170	6.3×11	215	8×11.5	285	8×11.5	300	10×16	510
		6.3×11	170					8×11.5	250				
330	331	6.3×11	215	6.3×11	240	8×11.5	315	8×11.5	340	10×12.5	420	10×16	590
				8×11.5	280					10×16	470		
470	471	8×11.5	260	6.3×11	285	8×11.5	365	10×12.5	470	10×16	545	10×20	710
				8×11.5	330	10×12.5	430			10×20	590		
680	681	8×11.5	365	8×11.5	410	8×16	465	10×16	620	10×20	680	12.5×20	925
						10×12.5	480						
1000	102	8×11.5	445	8×16	550	10×16	680	10×20	820	12.5×20	1025	12.5×25	1290
				10×12.5	570								
1500	152			10×16	630	10×20	750	12.5×20	900	12.5×25	1125		
2200	222	10×16	740	10×20	900	12.5×20	1110	12.5×25	1460	16×25	1500	16×35	1230
				12.5×20	950					18×20	1460		
3300	332	10×20	1030	12.5×20	1205	12.5×25	1390	16×25	1645	16×30	1810	18×35	2165
4700	472	12.5×20	1280	12.5×25	1490	16×25	1740	16×30	1840	18×35	2335	22×40	2650
6800	682	12.5×25	1550	16×25	1825	16×30	2080	16×35	2100				
10000	103	16×25	1900	16×30	1980	16×35	2380	18×35	2500				
15000	153	16×30	2190	16×40	2180	18×35	2600						
22000	223	18×35	2400	18×40	2410								

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

120 目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承诺书, 并以此为准使用。
The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.

尺寸 Dimensions

CAP(μF)	WV	63V(1J)		100V(2A)		160V(2C)		200V(2D)		220V(2P)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1			5×11	3						
0.22	R22			5×11	4						
0.33	R33			5×11	5						
0.47	R47			5×11	10						
1	010			5×11	16						
2.2	2R2			5×11	23			6.3×11	22	6.3×11	23
3.3	3R3			5×11	35			6.3×11	28	6.3×11	28
4.7	4R7	5×11	40	5×11	40	6.3×11	40	6.3×11	42	8×11.5	45
10	100	5×11	60	6.3×11	60	8×11.5	73	8×14	80	8×16	84
				8×11.5	70						
22	220	5×11	80	6.3×11	90	10×12.5	120	10×16	132	10×20	150
		6.3×11	90	8×11.5	100						
33	330	8×11.5	120	8×11.5	145	10×16	165	10×20	185	12.5×20	200
				10×12.5	170						
47	470	6.3×11	145	10×12.5	200	10×20	210	12.5×20	230	12.5×25	250
		8×11.5	165	10×16	250						
68	680					12.5×20	285	12.5×25	310	16×20	320
82	820					12.5×20	315	12.5×25	345	16×25	390
100	101	10×12.5	250	10×20	350	12.5×25	385	16×20	390	16×30	460
150	151					16×25	515	16×25	520	16×35	620
180	181					16×25	590	16×30	620	16×40	700
220	221	10×20	500	12.5×25	660	16×30	700	16×35	730	18×40	820
270	271					16×35	830	16×40	860		
330	331	12.5×20	690	12.5×25	800	16×40	980	18×40	1000		
390	391					18×40	1100	18×45	1150		
470	471	12.5×20	810	16×25	990	18×45	1250				
560	561										
1000	102	16×25	1450	18×40	2020						
2200	222	18×35	1780								
3300	332	22×40	2000								

CAP(μF)	WV	250V(2E)		350V(2V)		400V(2G)		420V(2M)		450V(2W)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	R47							6.3×11	11	6.3×11	11
1	010							6.3×11	15	6.3×11	15
2.2	2R2	6.3×11	23	6.3×11	25	8×11.5	26	8×11.5	26	8×11.5	26
3.3	3R3	6.3×11	28	8×11.5	28	8×11.5	30	8×11.5	30	8×11.5	30
4.7	4R7	8×11.5	45	8×11.5	48	8×11.5	50	8×16	50	8×16	50
6.8	6R8	8×11.5	58	8×14	60	8×12	63	10×16	63	10×16	63
8.2	8R2	8×14	68	8×16	70	8×16	72	10×16	72	10×16	72
10	100	8×16	84	10×16	85	10×16	88	10×16	80	10×20	85
15	150	10×16	112	10×20	113	10×20	115	12.5×20	112	12.5×20	112
22	220	10×20	150	12.5×20	152	12.5×20	155	12.5×25	152	12.5×25	152
27	270	10×20	170	12.5×25	188	12.5×25	190	12.5×25	175	12.5×30	185
33	330	12.5×20	200	12.5×25	205	12.5×25	210	12.5×30	202	12.5×30	202
39	390	12.5×20	210	12.5×30	255	12.5×30	260	16×20	220	16×25	240
47	470	12.5×25	250	16×25	290	16×25	295	16×25	270	16×30	290
56	560	12.5×30	300	16×25	320	16×25	325	16×30	320	16×30	320
68	680	16×20	320	16×30	370	16×30	380	16×30	340	16×35	360
82	820	16×25	390	16×35	440	16×35	450	16×35	405	16×40	430
100	101	16×30	460	16×40	510	16×40	520	16×40	480	18×35	480
120	121	16×30	510	18×40	590	18×40	600	18×40	550	18×40	550
150	151	16×35	620	18×45	690	18×45	700	18×45	650	18×45	650
180	181	16×40	700								
220	221	18×40	820								

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

121 目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承诺书, 并以此为准使用。
The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.



频率修正系数 Frequency Coefficient

Rated Voltage(V)	Freq.(Hz)		50	120	300	1K	10K	100K
	CAP(μF)							
6.3~100	~47		0.75	1.00	1.35	1.57	2.00	2.30
	100~470		0.80	1.00	1.23	1.34	1.50	1.65
	≥560		0.85	1.00	1.10	1.13	1.15	1.40
160~450	0.47~4.7		0.65	1.00	1.35	1.75	2.30	2.50
	6.8~82		0.75	1.00	1.25	1.50	1.75	1.80
	≥100		0.80	1.00	1.15	1.30	1.40	1.50

尺寸 Dimensions

CAP(μF)		WV	6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)	
			Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1											5×11	3	
0.22	R22											5×11	4	
0.33	R33											5×11	5	
0.47	R47											5×11	6	
1	O10											5×11	13	
2.2	2R2											5×11	20	
3.3	3R3											5×11	30	
4.7	4R7					5×11	20	5×11	20			5×11	40	
10	100	5×11	20			5×11	35	5×11	40	5×11	40	5×11	55	
22	220			5×11	50	5×11	55	5×11	60	5×11	65	5×11	80	
33	330	5×11	55	5×11	60	5×11	65	5×11	75	5×11	80	5×11	100	
												6.3×11	115	
47	470	5×11	65	5×11	70	5×11	80	5×11	85	5×11	100	6.3×11	135	
												8×11.5	160	
100	101	5×11	95	5×11	105	5×11	125	6.3×11	160	6.3×11	170	8×11.5	230	
								6.3×11	140		8×11.5	200		
220	221	5×11	150	6.3×11	170	6.3×11	215	8×11.5	285	8×11.5	300	10×16	510	
		6.3×11	170			8×11.5	250							
330	331	6.3×11	215	6.3×11	240	8×11.5	315	8×11.5	340	10×12.5	420	10×16	590	
				8×11.5	280					10×16	470			
470	471	8×11.5	260	6.3×11	285	8×11.5	365	10×12.5	470	10×16	545	10×20	710	
				8×11.5	330	10×12.5	430			10×20	590			
680	681	8×11.5	365	8×11.5	410	8×16	465	10×16	620	10×20	680	12.5×20	925	
						10×12.5	480							
1000	102	8×11.5	445	8×16	550	10×16	680	10×20	820	12.5×20	1025	12.5×25	1290	
				10×12.5	570									
1500	152			10×16	630	10×20	750	12.5×20	900	12.5×25	1125			
2200	222	10×16	740	10×20	900	12.5×20	1110	12.5×25	1460	16×25	1500	16×35	1230	
				12.5×20	950					18×20	1460			
3300	332	10×20	1030	12.5×20	1205	12.5×25	1390	16×25	1645	16×30	1810	18×35	2165	
4700	472	12.5×20	1280	12.5×25	1490	16×25	1740	16×30	1840	18×35	2335	22×40	2650	
6800	682	12.5×25	1550	16×25	1825	16×30	2080	16×35	2100					
10000	103	16×25	1900	16×30	1980	16×35	2380	18×35	2500					
15000	153	16×30	2190	16×40	2180	18×35	2600							
22000	223	18×35	2400	18×40	2410									

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

120 目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为基础使用。
The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.

尺寸 Dimensions

CAP(μF)		WV	63V(1J)		100V(2A)		160V(2C)		200V(2D)		220V(2P)	
			Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1				5×11	3						
0.22	R22				5×11	4						
0.33	R33				5×11	5						
0.47	R47				5×11	10						
1	O10				5×11	16						
2.2	2R2				5×11	23			6.3×11	22	6.3×11	23
3.3	3R3				5×11	35			6.3×11	28	6.3×11	28
4.7	4R7	5×11	40	5×11	40	6.3×11	40	6.3×11	42	8×11.5	45	
10	100	5×11	60	6.3×11	60	8×11.5	73	8×14	80	8×16	84	
				8×11.5	70							
22	220	5×11	80	6.3×11	90	10×12.5	120	10×16	132	10×20	150	
		6.3×11	90	8×11.5	100							
33	330	8×11.5	120	8×11.5	145	10×16	165	10×20	185	12.5×20	200	
				10×12.5	170							
47	470	6.3×11	145	10×12.5	200	10×20	210	12.5×20	230	12.5×25	250	
		8×11.5	165	10×16	250							
68	680					12.5×20	285	12.5×25	310	16×20	320	
82	820					12.5×20	315	12.5×25	345	16×25	390	
100	101	10×12.5	250	10×20	350	12.5×25	385	16×20	390	16×30	460	
150	151					16×25	515	16×25	520	16×35	620	
180	181					16×25	590	16×30	620	16×40	700	
220	221	10×20	500	12.5×25	660	16×30	700	16×35	730	18×40	820	
270	271					16×35	830	16×40	860			
330	331	12.5×20	690	12.5×25	800	16×40	980	18×40	1000			
390	391					18×40	1100	18×45	1150			
470	471	12.5×20	810	16×25	990	18×45	1250					
560	561											
1000	102	16×25	1450	18×40	2020							
2200	222	18×35	1780									
3300	332	22×40	2000									

CAP(μF)		WV	250V(2E)		350V(2V)		400V(2G)		420V(2M)		450V(2W)		
			Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
0.47	R47								6.3×11	11	6.3×11	11	
1	O10							6.3×11	15	6.3×11	15	6.3×11	15
2.2	2R2	6.3×11	23	6.3×11	25	8×11.5	26	8×11.5	26	8×11.5	26	8×11.5	26
3.3	3R3	6.3×11	28	8×11.5	28	8×11.5	30	8×11.5	30	8×11.5	30	8×11.5	30
4.7	4R7	8×11.5	45	8×11.5	48	8×11.5	50	8×16	50	8×16	50	8×16	50
6.8	6R8	8×11.5	58	8×14	60	8×12	63	10×16	63	10×16	63	10×16	63
8.2	8R2	8×14	68	8×16	70	8×16	72	10×16	72	10×16	72	10×16	72
10	100	8×16	84	10×16	85	10×16	88	10×16	80	10×20	85	10×20	85
15	150	10×16	112	10×20	113	10×20	115	12.5×20	112	12.5×20	112	12.5×20	112
22	220	10×20	150	12.5×20	152	12.5×20	155	12.5×25	152	12.5×25	152	12.5×25	152
27	270	10×20	170	12.5×25	188	12.5×25	190	12.5×25	175	12.5×30	185	12.5×30	185
33	330	12.5×20	200	12.5×25	205	12.5×25	210	12.5×30	202	12.5×30	202	12.5×30	202
39	390	12.5×20	210	12.5×30	255	12.5×30	260	16×20	220	16×25	240	16×25	240
47	470	12.5×25	250	16×25	290	16×25	295	16×25	270	16×30	290	16×30	290
56	560	12.5×30	300	16×25	320	16×25	325	16×30	320	16×30	320	16×30	320
68	680	16×20	320	16×30	370	16×30	380	16×30	340	16×35	360	16×35	360
82	820	16×25	390	16×35	440	16×35	450	16×35	405	16×40	430	16×40	430
100	101	16×30	460	16×40	510	16×40	520	16×40	480	18×35	480	18×35	480
120	121	16×30	510	18×40	590	18×40	600	18×40	550	18×40	550	18×40	550
150	151	16×35	620	18×45	690	18×45	700	18×45	650	18×45	650	18×45	650
180	181	16×40	700										
220	221	18×40	820										

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

121 目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为基础使用。
The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Huawei](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [1814181](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#)
[NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#)
[NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [476CKH100MSA](#) [477RZS050M](#)
[UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [052687X](#) [ECE-](#)
[A1CF471](#) [EKXG451ELL820MM30S](#) [686CKR050M](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)
[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#)
[TER330M50GM](#) [477KXM035MGBWSA](#)