



安装尺寸图

规格 Specifications

| | |
|----------------------------|--------------------------|
| 额定负荷 Rating | DC 12V/50mA |
| 接触电阻 Contact Resistance | 100mΩ max. |
| 绝缘电阻 Insulation resistance | DC100V 60S 100MΩ min. |
| 抗电强度 Dielectric strength | AC250V(50~60HZ) 60S min. |
| 操作力 Operation force | 250±50gf |
| 寿命试验 Operating Life | 100,000 cycles |
| 行程 Travels | 0.25±0.1mm |
| 包装数量 Package | 1000PCS/Reel |

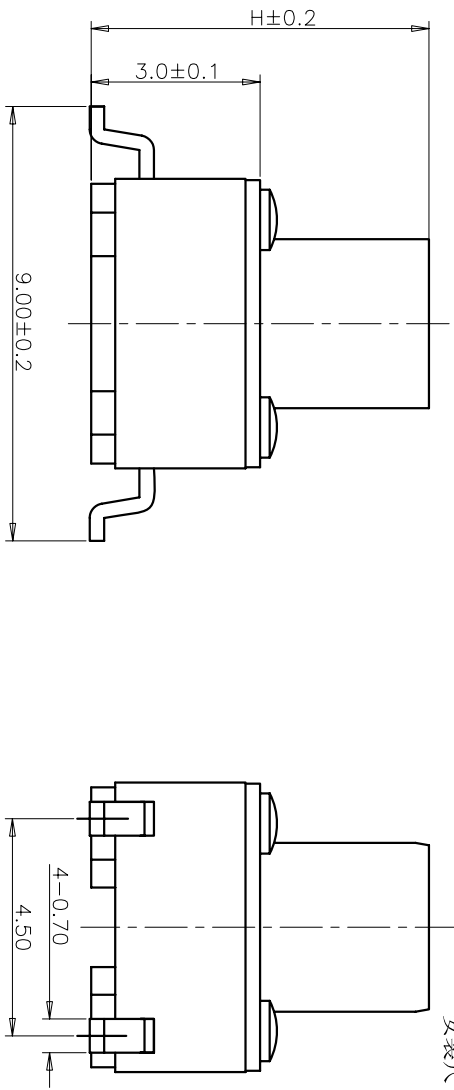

回路图

| ITEM | PART NAME | QUANTITY | MATERIAL | FINISH |
|------|-----------|----------|--------------------|-----------|
| 5 | COVER | 1 | BRASS | Ni-PLATED |
| 4 | ACTUATOR | 1 | PPA | BLACK |
| 3 | DOME | 1 | Stainless Steel/Ag | Ag-PLATED |
| 2 | TERMINAL | 1 | BRASS | Ag-PLATED |
| 1 | HOUSING | 1 | PPA | BLACK |

| X. ± | 0.3 | X' ± | 3' | UNITS | MM |
|--------|------|---------|------|--------|----|
| X ± | 0.2 | X' ± | 2' | MAT'L | |
| .XX ± | 0.1 | .XX' ± | 1' | FINISH | |
| .XXX ± | 0.05 | .XXX' ± | 0.5' | | |

| | | | |
|------------------------|------------------------|------------------------|---------------------|
| NAME(INTENDED USE) | 6X6 SERIES TACT SWITCH | NAME(INTENDED USE) | 1TS005F-2500-8000A2 |
| PART NO.(INTENDED USE) | | PART NO.(INTENDED USE) | |
| APPD: | W.P.Lu 2018.3.31 | APPD: | W.P.Lu 2018.3.31 |
| CHKD: | S.L.Li 2018.3.31 | CHKD: | S.L.Li 2018.3.31 |
| DR: | Y.Y.Chen 2018.3.31 | DR: | Y.Y.Chen 2018.3.31 |

| | | | |
|----------|------------------------|----------|------------------------|
| DWG NO.: | 1TS005F-2500-8000A2-CT | DWG NO.: | 1TS005F-2500-8000A2-CT |
| TITLE: | PRODUCT DRAWING | TITLE: | PRODUCT DRAWING |
| SCALE | 10/1 | SCALE | 10/1 |
| SHEET | 1/2 | SHEET | 1/2 |
| REV. | A | REV. | A |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN

PRODUCT NO.: 1TS005F***-***0-***0A2 - CT

接触开关

系列:

外形:

按钮颜色:

底座颜色:

盖板颜色:

初始颜色, 则不启用

操作力度:

120=120gf

160=160gf

200=200gf

260=260gf

手感:

0=常规(薄片)

材料:

0=初始材质

1=新增材质

依次增加

产品高度(H):

430=4.3mm

500=5.0mm

600=6.0mm

700=7.0mm

800=8.0mm

900=9.0mm

编带

非编带, 不启用

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [HYP](#) manufacturer:

Other Similar products are found below :

[6407-250V-25273P](#) [ADTSA62NV](#) [B3F-3123](#) [1977177-8](#) [1977266-1](#) [ADTSA63NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#) [ADTSM32NVTR](#)
[ADTSMW64RV](#) [1977120-6](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [KSC241J SP DELTA LFS](#) [3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#)
[09158](#) [6407-250V-25343P](#) [ADTSM31NVTR](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#) [TME1-01-Z](#) [Y651050400P](#) [KMT011MNGJLHS](#) [70-201.0](#)
[ADTSG648NV](#) [ADTSM62KSVTR](#) [ADTSM648NV](#) [95C06E3RAT](#) [3ATH9Q](#) [FSMRA8JHA04](#) [HARS0073](#) [Y33R411N9FPLFT](#)
[Y33R51139FPLFT](#) [Y31C01402FPLFS](#) [PTS645SK50SMTR92](#) [ADTSM32NVB](#) [KMS233GPWTFLG](#) [Y78B64124FP](#) [Y33A812C5FP LFT](#)
[Y56B2D120FP LFS](#) [PTS645 DVM83-BN125-2 LFS](#) [B3W 1000G](#) [B3F 1002C](#) [B3F 0047H](#) [B3W 1002C](#) [B3F 5001G](#) [B3W 1100C](#) [1-](#)
[1571563-4](#)