



NOTES1:

UL Standard

1. Rated voltage/current : 300V / 16A
2. Withstanding voltage : AC1600V/1Min.
3. Wire range : 12~28AWG
4. Ratings : Use group B,C 300V AC/DC
Use group D 600V AC/DC

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	6KV	6KV	6KV
Rate voltage(V)	1000V	630V	500V
Rate current(A)	20A		

2. Wire range : 0.2~2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.50mm, Poles : N=02~12P
3. Stripping length : 8mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					0.1/10
To	Over	To	Over	To	Over	To	
6	10	6	10	30	60	100	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	
						±1.30	
						±2'	

6. RoHS Compliance

Ordering Information

JL9EDGK - 750 XX B 0 1

Pitch
750=7.50PH

No. of pins
2P~15P






Housing Color

- B=Black
- G=Green
- U=Blue
- R=Red
- W=White
- Y=Yellow
- D=Orange
- E=Grey

Packing

- 0=Pe bag
- A=Tray
- T=Tube

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

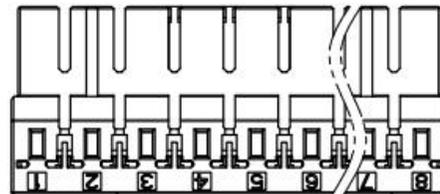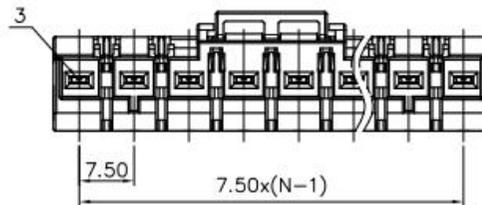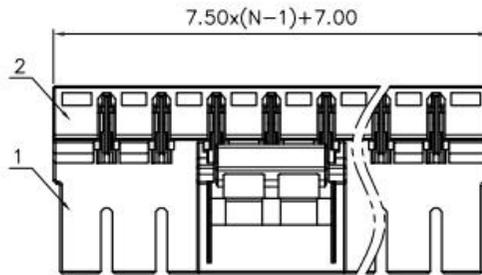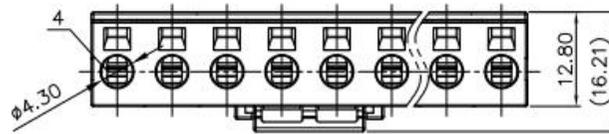

ITEM	NAME OF PART	MATERIAL	NOTES
4	Spring	Stainless Steel	
3	Clamp	Copper alloy	Sn/Au Plated
2	Cover	PA66+GF	UL94V-0
1	Housing	PA66+GF	UL94V-0

DRAW	LICHAO LIU	SCALE	FIT
CHECK	LICHAO LIU	UNIT	mm
APPROVE	G. Y. L.	SIZE	A4
		SHEET	1/1
		PROJ.	◆

JILN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD


PART NO. JL9EDGK-750XXB01

TITLE: JL9EDGK-7.5母端/接线端子台



HSF RoHS us

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE


2P




3P




4P




12.80




5P



12.80




6P




12.80




7P




20.30



8P

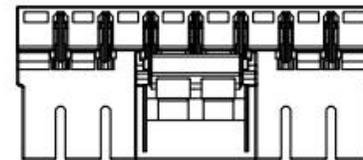

20.30



37.50

DRAW	Z. S. P	SCALE	FIT
CHECK	LICHAO LIU	UNIT	mm
APPROVE	G. Y. L	SIZE	A4
		SHEET	2/3
		PROJ.	



JILN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

PART NO.	JL9EDGK-750XXB01
TITLE:	JL9EDGK-7.5母端/接线端子台



HSF RoHS  us

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



9P

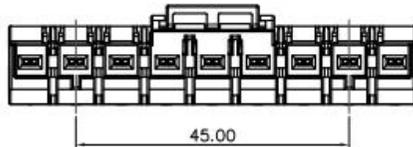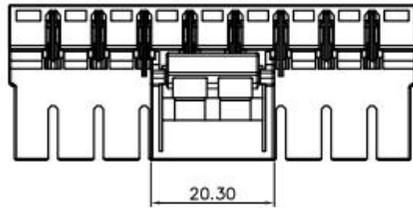



10P

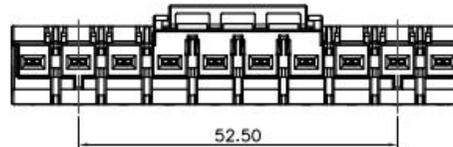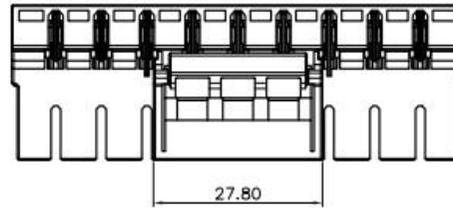

11P

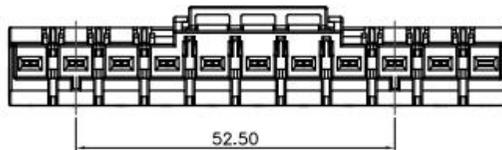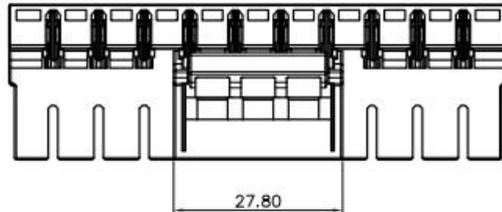

12P

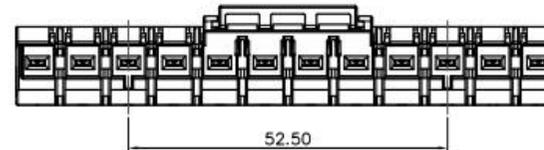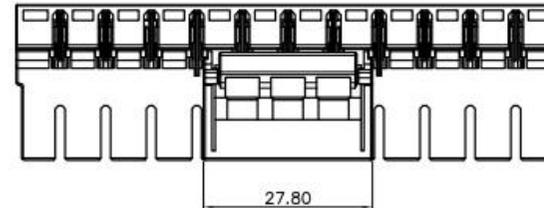

DRAW	Z. S. P	SCALE	FIT	 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD	
CHECK	LICHAO LIU	UNIT	mm		
APPROVE	G. Y. L	SIZE	A4	PART NO.	JL9EDGK-750XXB01
		SHEET	3/3	TITLE:	JL9EDGK-7.5母端/接线端子台
		PROJ.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)