

BAT54 Marking Code: L4
 BAT54A Marking Code: L42
 BAT54C Marking Code: L43
 BAT54S Marking Code: L44
 SOT-23 Plastic Package

Absolute Maximum Ratings¹⁾ (T_a = 25°C)


Parameter	Symbol	Limits	Unit
Repetitive peak reverse voltage	V _{RRM}	30	V
Average rectified forward current	I _{F(AV)}	200	mA
Repetitive Peak Forward Current	I _{FRM}	300	mA
Non-repetitive peak forward surge current at Pulse width=1 second	I _{FSM}	600	mA
Power dissipation	P _{tot}	290	mW
Thermal resistance junction to ambient air	R _{θJA}	430	°C/W
Junction temperature	T _j	- 55 to + 150	°C
Storage temperature range	T _{stg}	- 55 to + 150	°C

¹⁾ These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.


Characteristics at T_a = 25°C

Parameter	Symbol	Min.	Max.	Unit
Forward voltage at I _F = 0.1 mA at I _F = 1 mA at I _F = 10 mA at I _F = 30 mA at I _F = 100 mA	V _F	-	240 320 400 500 1000	mV
Reverse current at V _R = 25 V	I _R	-	2	μA
Breakdown voltage at I _R = 10 μA	V _R	30	-	V
Total capacitance at V _R = 1 V, f = 1 MHz	C _{tot}	-	10	pF
Reverse recovery time at I _F = 10 mA, I _R = 10 mA, I _{RR} = 1 mA, R _L = 100 Ω	t _{rr}	-	5	ns


Typical Forward Voltage
Forward Current
at Various Temperatures

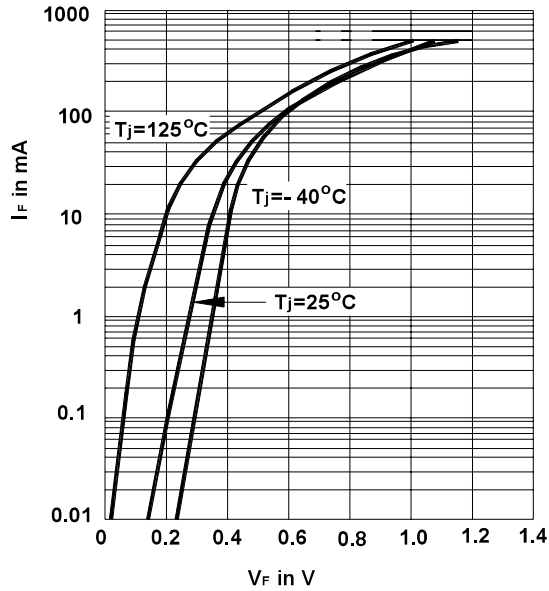

Typical Variation of Reverse
Current at Various Temperatures

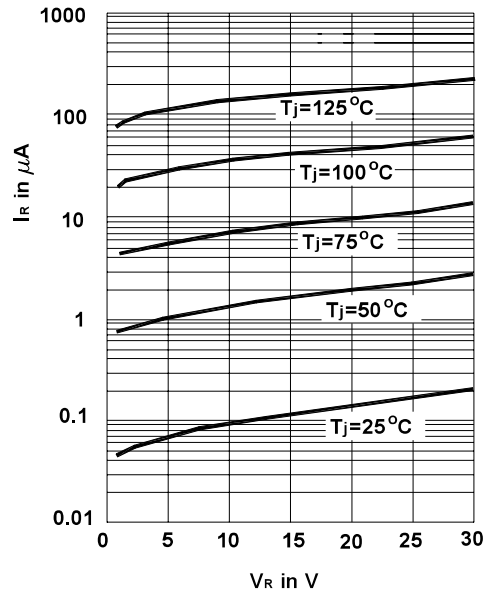

Typical Capacitance vs.
Reverse Applied Voltage V_R

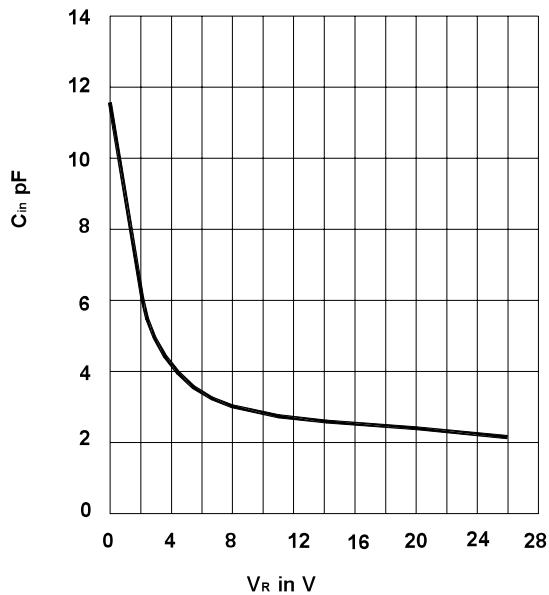

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Jing Heng](#) manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)