


1 2 3 4 5 6 7 8 9

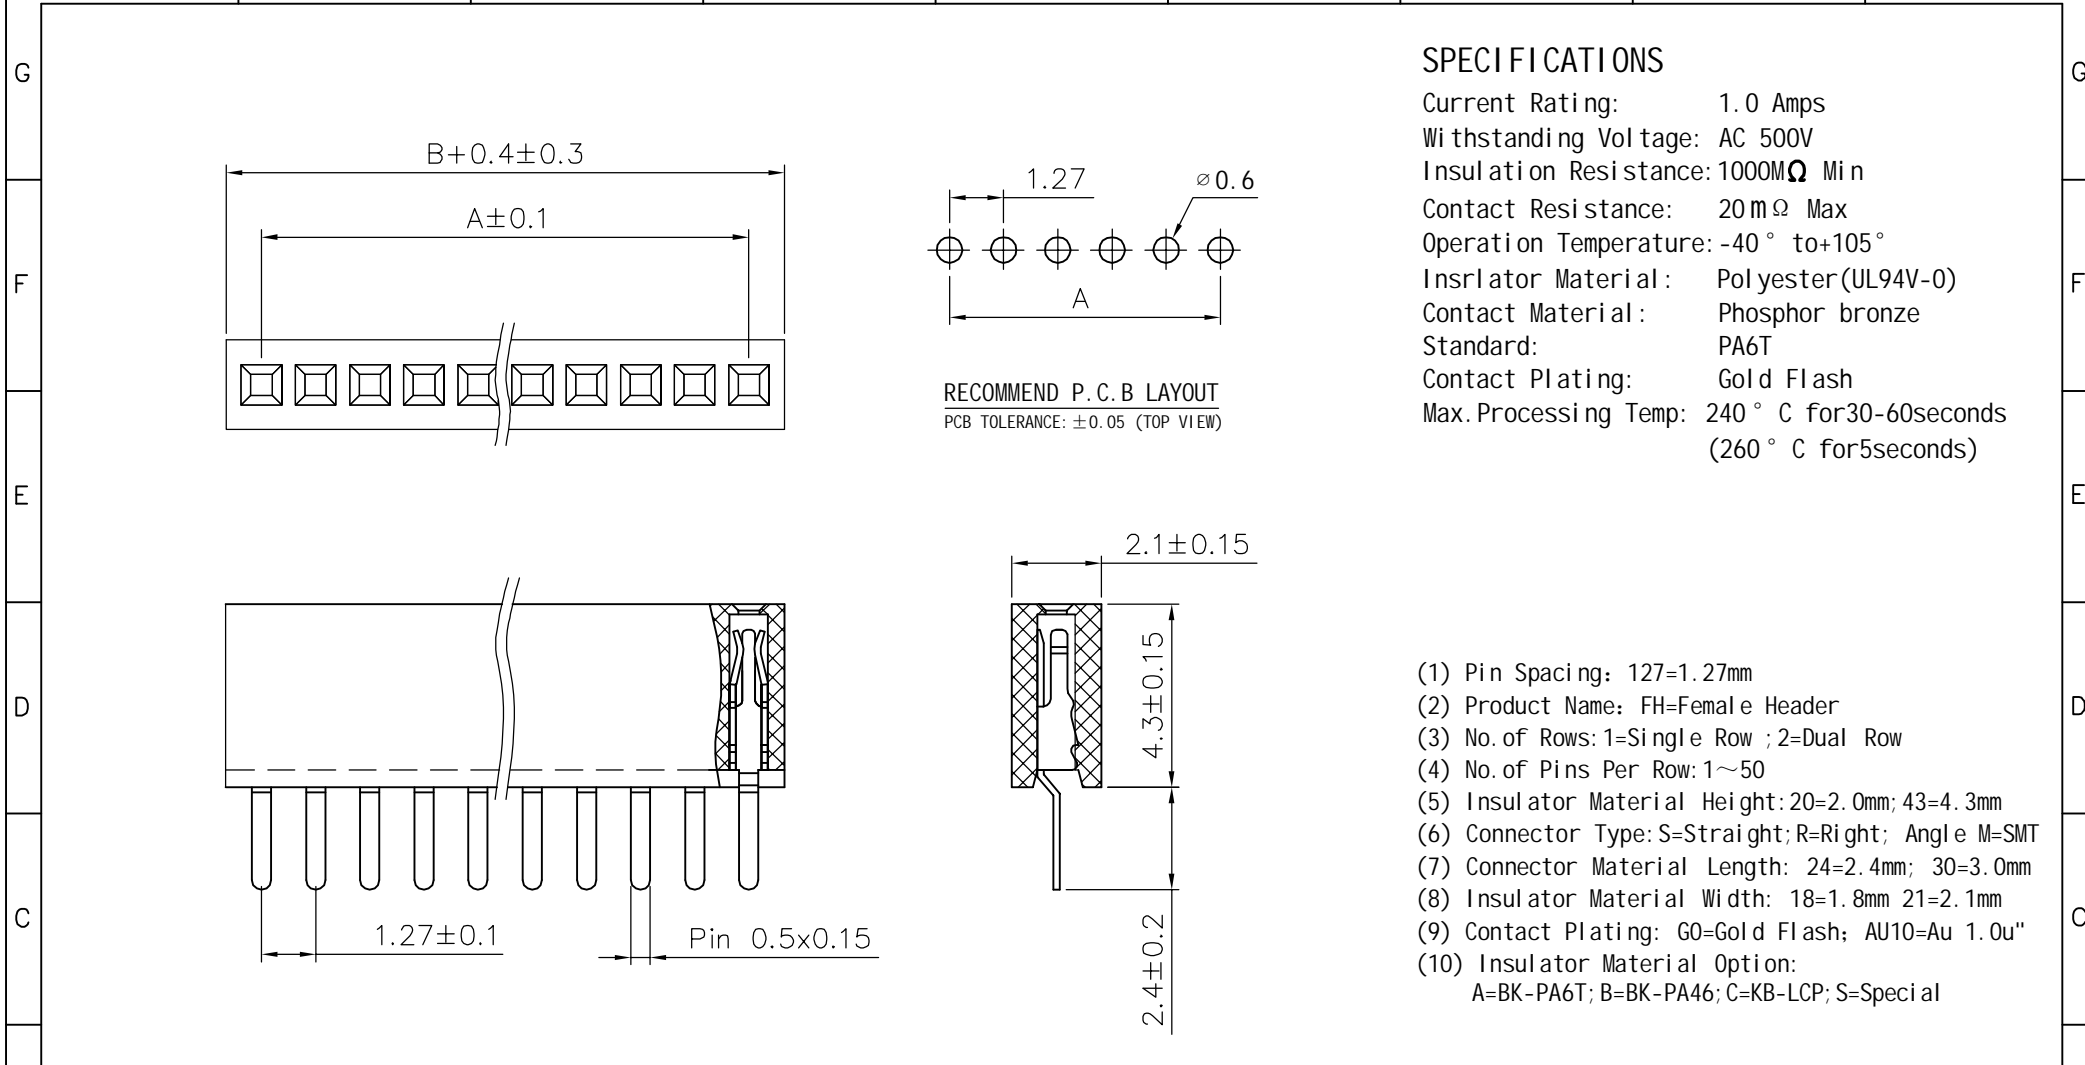

SPECIFICATIONS

Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 20 m Ω Max
 Operation Temperature: -40 $^{\circ}$ to +105 $^{\circ}$
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Phosphor bronze
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240 $^{\circ}$ C for 30-60 seconds
 (260 $^{\circ}$ C for 5 seconds)

- (1) Pin Spacing: 127=1.27mm
- (2) Product Name: FH=Female Header
- (3) No. of Rows: 1=Single Row ; 2=Dual Row
- (4) No. of Pins Per Row: 1~50
- (5) Insulator Material Height: 20=2.0mm; 43=4.3mm
- (6) Connector Type: S=Straight; R=Right; Angle M=SMT
- (7) Connector Material Length: 24=2.4mm; 30=3.0mm
- (8) Insulator Material Width: 18=1.8mm 21=2.1mm
- (9) Contact Plating: G0=Gold Flash; AU10=Au 1.0u"
- (10) Insulator Material Option:
 A=BK-PA6T; B=BK-PA46; C=KB-LCP; S=Special

深圳市金航标电子有限公司 KH-1.27FH-1X10P-H4.3		WWW.BDS666.COM 0755-83044319		<table border="1"> <thead> <tr> <th>No. of</th><th>DIM. A</th><th>DIM. B</th><th>No. of</th><th>DIM. A</th><th>DIM. B</th><th>No. of</th><th>DIM. A</th><th>DIM. B</th><th>No. of</th><th>DIM. A</th><th>DIM. B</th><th>No. of</th><th>DIM. A</th><th>DIM. B</th></tr> </thead> <tbody> <tr><td>1</td><td>—</td><td>—</td><td>11</td><td>12.70</td><td>13.97</td><td>21</td><td>25.40</td><td>26.67</td><td>31</td><td>38.10</td><td>39.37</td><td>41</td><td>50.80</td><td>52.07</td></tr> <tr><td>2</td><td>1.27</td><td>2.54</td><td>12</td><td>13.97</td><td>15.24</td><td>22</td><td>26.67</td><td>27.94</td><td>32</td><td>39.37</td><td>40.64</td><td>42</td><td>52.07</td><td>53.34</td></tr> <tr><td>3</td><td>2.54</td><td>3.81</td><td>13</td><td>15.24</td><td>16.51</td><td>23</td><td>27.94</td><td>29.21</td><td>33</td><td>40.64</td><td>41.91</td><td>43</td><td>53.34</td><td>54.61</td></tr> <tr><td>4</td><td>3.81</td><td>5.08</td><td>14</td><td>16.51</td><td>17.78</td><td>24</td><td>29.21</td><td>30.48</td><td>34</td><td>41.91</td><td>43.18</td><td>44</td><td>54.61</td><td>55.88</td></tr> <tr><td>5</td><td>5.08</td><td>6.35</td><td>15</td><td>17.78</td><td>19.05</td><td>25</td><td>30.48</td><td>31.75</td><td>35</td><td>43.18</td><td>44.45</td><td>45</td><td>55.88</td><td>57.15</td></tr> <tr><td>6</td><td>6.35</td><td>7.62</td><td>16</td><td>19.05</td><td>20.32</td><td>26</td><td>31.75</td><td>33.02</td><td>36</td><td>44.45</td><td>45.72</td><td>46</td><td>57.15</td><td>58.42</td></tr> <tr><td>7</td><td>7.62</td><td>8.89</td><td>17</td><td>20.32</td><td>21.59</td><td>27</td><td>33.02</td><td>34.29</td><td>37</td><td>45.72</td><td>46.99</td><td>47</td><td>58.42</td><td>59.69</td></tr> <tr><td>8</td><td>8.89</td><td>10.16</td><td>18</td><td>21.59</td><td>22.86</td><td>28</td><td>34.29</td><td>35.56</td><td>38</td><td>46.99</td><td>48.26</td><td>48</td><td>59.69</td><td>60.96</td></tr> <tr><td>9</td><td>10.16</td><td>11.43</td><td>19</td><td>22.86</td><td>24.13</td><td>29</td><td>35.56</td><td>36.83</td><td>39</td><td>48.26</td><td>49.53</td><td>49</td><td>60.96</td><td>62.23</td></tr> <tr><td>10</td><td>11.43</td><td>12.70</td><td>20</td><td>24.13</td><td>25.40</td><td>30</td><td>36.83</td><td>38.10</td><td>40</td><td>49.53</td><td>50.80</td><td>50</td><td>62.23</td><td>63.50</td></tr> </tbody> </table>												No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	1	—	—	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07	2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34	3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61	4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88	5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15	6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42	7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69	8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96	9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23	10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50
No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B																																																																																																																																																																						
1	—	—	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07																																																																																																																																																																						
2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34																																																																																																																																																																						
3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61																																																																																																																																																																						
4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88																																																																																																																																																																						
5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15																																																																																																																																																																						
6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42																																																																																																																																																																						
7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69																																																																																																																																																																						
8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96																																																																																																																																																																						
9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23																																																																																																																																																																						
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50																																																																																																																																																																						
UNLESS OTHERWISE SPECIFIED TOLERANCE X : ± 0.3 X $^{\circ}$: $\pm 5^{\circ}$ X.X : ± 0.2 X.X $^{\circ}$: $\pm 1^{\circ}$ X.XX : ± 0.1 X.XX $^{\circ}$: $\pm 0.5^{\circ}$		DRAWING NAME: 1.27FH 1x8Pin H4.3 DIP SIZE: A4 SCALE: N:1 PROJECT NO.: REV: A UNIT: mm PROJECT: PAGE: 1/1																																																																																																																																																																																		
DRAW: LI BEI LIN 12/03/07 CHECKED: / / APPROVED: / /																																																																																																																																																																																				

1 2 3 4 5 6 7 8 9

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Kinghelm](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)