

**NRSE Series**  
**SMD Shielded Tiny Power Inductor**  
**Size 2510**




**CHARACTERISTICS**

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 2000pcs


**APPLICATION**

- DC/DC converter
- LC filter

**Dimensions: [mm]**

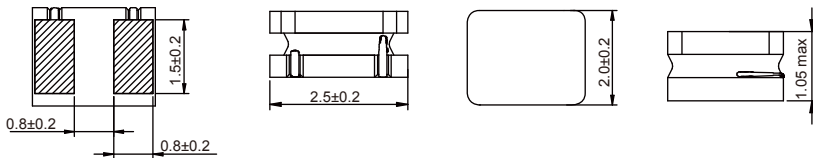

**Land Pattern: [mm]**



**Electrical Properties:**

Part No	Inductance (μH)	Tolerance	Saturation current Max. (A)	Saturation current Typ. (A)	Temperature Rise Current Max. (A)	DCR Typ. (Ω)	DCR Max. (Ω)
NRSE2510-R33M	0.33	±20%	3.60	4.30	2.45	0.033	0.043
NRSE2510-R47M	0.47	±20%	2.80	3.20	2.40	0.033	0.044
NRSE2510-R68M	0.68	±20%	2.75	3.10	2.10	0.051	0.062
NRSE2510-1R0M	1.0	±20%	2.05	2.50	1.85	0.066	0.080
NRSE2510-1R5M	1.5	±20%	1.70	2.05	1.55	0.085	0.108
NRSE2510-2R2M	2.2	±20%	1.50	1.75	1.35	0.130	0.150
NRSE2510-3R3M	3.3	±20%	1.10	1.35	1.05	0.170	0.228
NRSE2510-4R7M	4.7	±20%	1.00	1.15	0.90	0.280	0.330
NRSE2510-5R6M	5.6	±20%	0.90	1.05	0.80	0.370	0.480
NRSE2510-6R8M	6.8	±20%	0.80	0.95	0.72	0.400	0.480
NRSE2510-8R2M	8.2	±20%	0.73	0.85	0.69	0.463	0.572
NRSE2510-100M	10	±20%	0.65	0.75	0.67	0.500	0.600
NRSE2510-150M	15	±20%	0.50	0.60	0.45	0.780	0.950


Operating temperature : -40 C ~ +125 C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 C


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

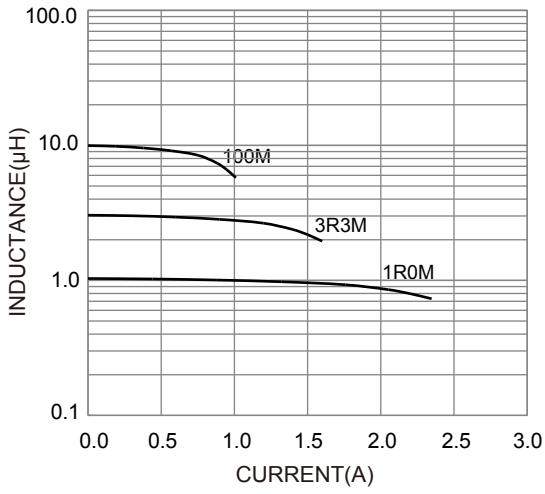

Temperature Rise VS. Current Characteristics:

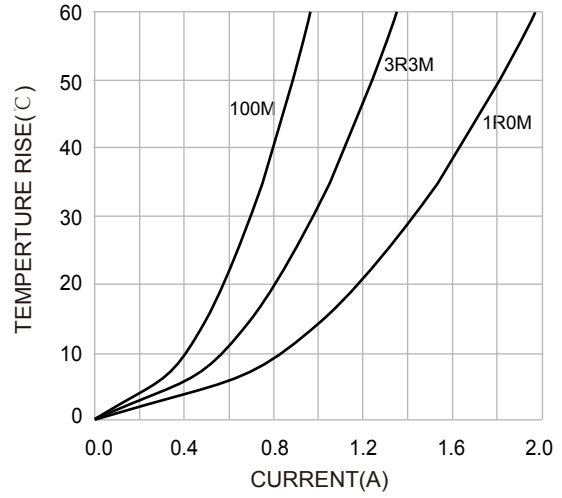

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)