PRODUCT DATASHEET CP15916_CARMEN-RS-C

CARMEN-RS-C

~10° spot beam. Assembly with holder C compatible with LEDiL HEKLA.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 69.5 mm
Height	41.5 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIAL SPECIFICATIONS:

Component	Туре	Material	Colour	Finish
CARMEN-RS	Single lens	PMMA	clear	
CARMEN-HI D-C	Holder	PC	black	


ORDERING INFORMATION:

» Box size: 480 x 280 x 300 mm

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP15916_CARMEN-RS-C	Single lens	150	150	15	6.2




PRODUCT DATASHEET CP15916_CARMEN-RS-C

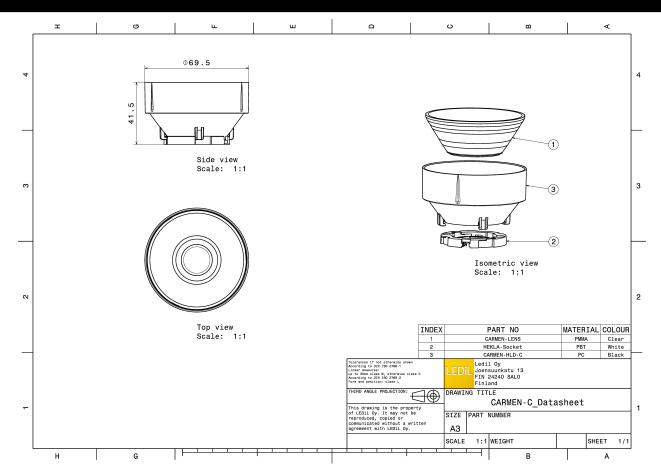

See also our general installation guide: www.ledil.com/installation_guide



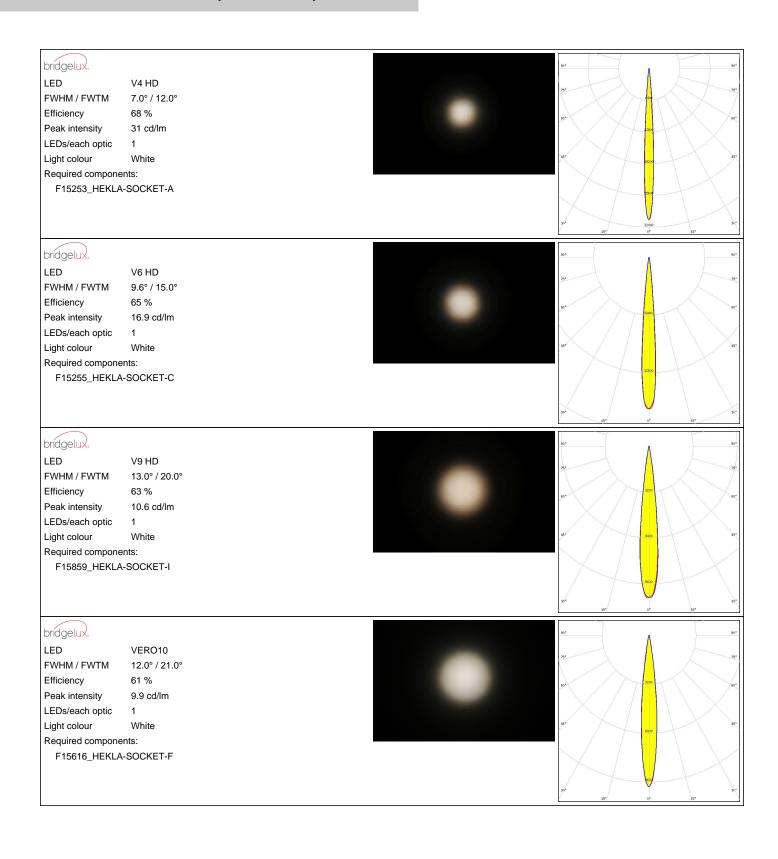



bridgelux

LED Vesta TW 6mm DP
FWHM / FWTM 9.0° / 16.0°
Efficiency 59 %
Peak intensity 16.5 cd/lm
LEDs/each optic 1
Light colour White

C16142_HEKLA-SOCKET-K Bender Wirth: 504 Typ L8

Required components:




bridgelux.

LED Vesta TW 9mm (9W) DP

FWHM / FWTM 12.0° / 23.0°
Efficiency 56 %
Peak intensity 7.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8




CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 13.0° / 22.0°
Efficiency 59 %
Peak intensity 8.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C





CITIZEN

 LED
 CLU700/701/702


 FWHM / FWTM
 9.0° / 15.0°


 Efficiency
 69 %

 Peak intensity
 22.6 cd/lm

 LEDs/each optic
 1

Light colour White
Required components:
F15255_HEKLA-SOCKET-C








CITIZEN

CLU700/701/702 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 8.0° / 15.0° Efficiency 62 % Peak intensity 20.2 cd/lm LEDs/each optic Light colour White Required components:


F15255_HEKLA-SOCKET-C

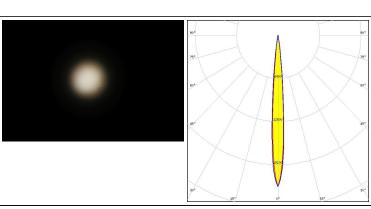

CITIZEN

LED CLU710/711 FWHM / FWTM 12.0° / 19.0° Efficiency 64 % Peak intensity 11.5 cd/lm LEDs/each optic 1 White Light colour Required components:

F15859_HEKLA-SOCKET-I




CITIZEN

LED CLU7A2 (LES 4.2mm)

FWHM / FWTM 6.0° / 11.0° Efficiency 65 % Peak intensity 34.7 cd/lm LEDs/each optic Light colour White Required components:

F15255_HEKLA-SOCKET-C







CITIZEN


CLU7B2 FWHM / FWTM 6.0° / 10.0° Efficiency 66 % Peak intensity 43.4 cd/lm LEDs/each optic

White Light colour Required components: F15255_HEKLA-SOCKET-C







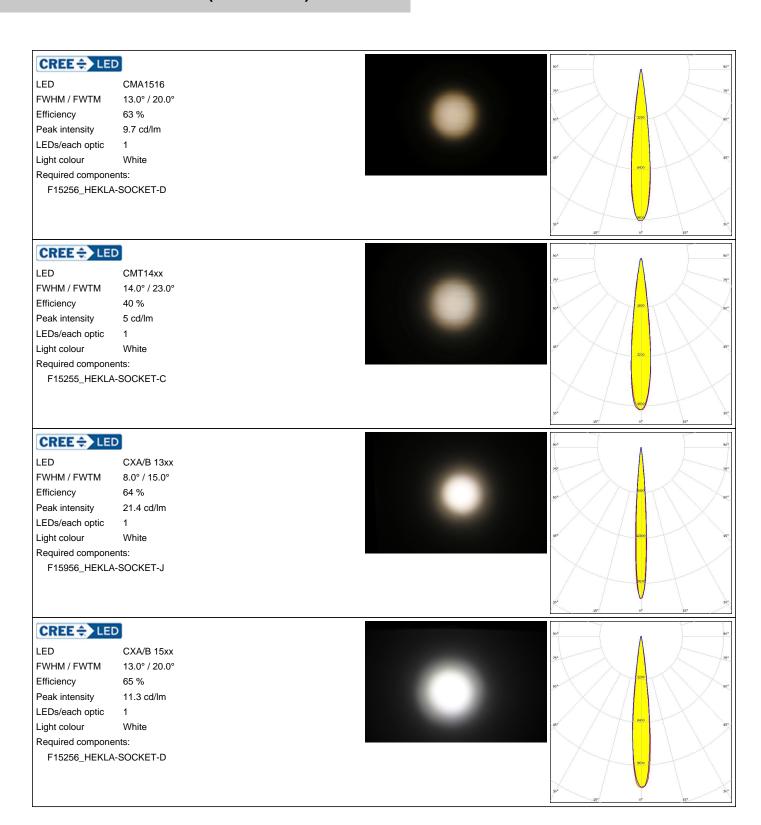




CREE - LED

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 17.0° / 26.0° Efficiency 59 % Peak intensity 5.6 cd/lm LEDs/each optic Light colour White Required components: F15256_HEKLA-SOCKET-D

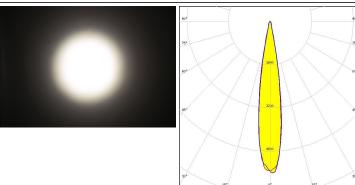


MUMILEDS

LED LUXEON CX Plus CoB L08 (Gen2)

FWHM / FWTM 17.0° / 30.0° Efficiency 54 % Peak intensity 4.3 cd/lm LEDs/each optic 1 White Light colour Required components: Bender Wirth: 637a Hekla






LUMILEDS

LED LUXEON CoB 1202HD

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 9.7° / 15.0° Efficiency 66 % Peak intensity 18.5 cd/lm LEDs/each optic Light colour White

F15848_HEKLA-SOCKET-G






MUMILEDS

Required components:

LED LUXEON CoB 1204HD

FWHM / FWTM 13.0° / 20.0° Efficiency 63 % Peak intensity 10 cd/lm LEDs/each optic White Light colour Required components: F15858_HEKLA-SOCKET-H










LED LUXEON CoB 1205HD

FWHM / FWTM 15.0° / 25.0°
Efficiency 59 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H




LUMILEDS

LED LUXEON CX Plus CoB - HD S01H4

FWHM / FWTM 8.0° / 14.0°
Efficiency 67 %
Peak intensity 27.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

equired components: Bender Wirth: 634c Hekla





MATERIAL PROPERTY OF THE PROP

LED LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 13.0° / 20.0° Efficiency 61 % Peak intensity 10.3 cd/lm LEDs/each optic 1

Light colour White
Required components:
Bender Wirth: 634c Hekla






DESCRIPTION LUMILEDS


LED LUXEON CX Plus CoB L04 / L05 (Gen2)

FWHM / FWTM 15.0° / 26.0°
Efficiency 58 %
Peak intensity 6.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 637a Hekla







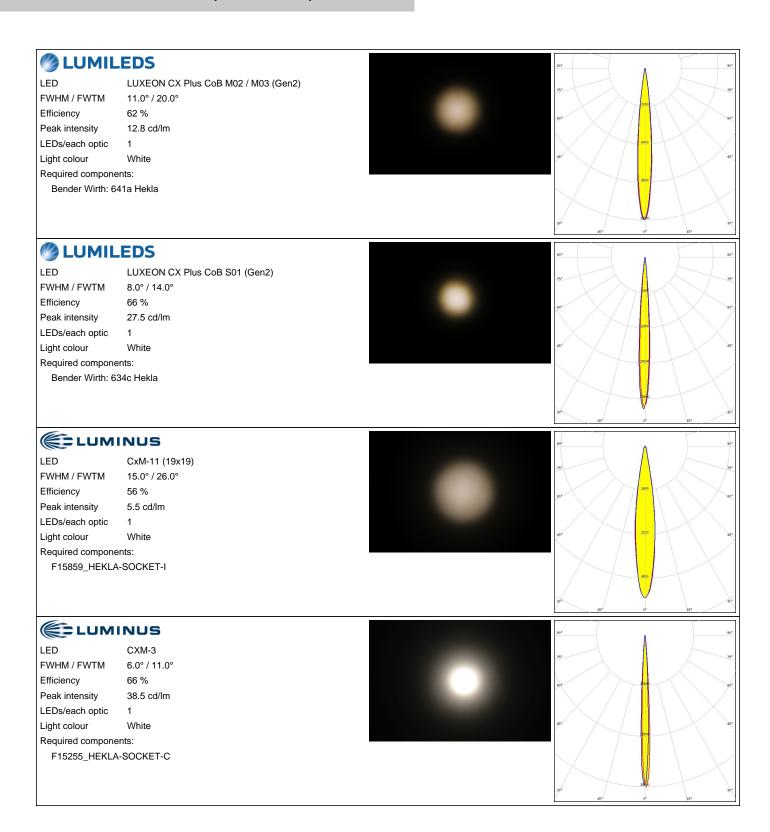






LED CXM-4
FWHM / FWTM 7.0° / 13.0°
Efficiency 63 %
Peak intensity 28.1 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15255_HEKLA-SOCKET-C





ELUMINUS

 LED
 CxM-9 (13.5x13.5)

 FWHM / FWTM
 13.0° / 21.0°


 Efficiency
 59 %

 Peak intensity
 9.3 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C





PHILIPS


LED Fortimo SLM L09 CoB

FWHM / FWTM 13.0° / 21.0° Efficiency 63 % Peak intensity 9.6 cd/lm LEDs/each optic 1

F15858_HEKLA-SOCKET-H

Light colour White Required components:






SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 13.0° / 21.0°
Efficiency 60 %
Peak intensity 9.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C








SAMSUNG

LED LC020C
FWHM / FWTM 11.0° / 19.0°
Efficiency 61 %
Peak intensity 12 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15848_HEKLA-SOCKET-G






SAMSUNG

LED LC020C G2
FWHM / FWTM 12.0° / 20.0°
Efficiency 59 %
Peak intensity 10 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15859_HEKLA-SOCKET-I





TRIDONIC


LED SLE G7 LES09
FWHM / FWTM 12.0° / 19.0°
Efficiency 61 %
Peak intensity 10.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C



TRIDONIC

LED SLE G7 LES13
FWHM / FWTM 17.0° / 28.0°
Efficiency 56 %
Peak intensity 5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I








XICATO

LED XOB 6 mm
FWHM / FWTM 9.0° / 15.0°
Efficiency 62 %
Peak intensity 20.1 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C





XICATO


Required components:

LED XOB 9.8 mm FWHM / FWTM 12.0° / 20.0 + 20.5°

Efficiency 60 %
Peak intensity 10.4 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C






XICATO

Required components:

LEDXTM - 19mm LESFWHM / FWTM18.0° / 38.0°Efficiency50 %Peak intensity2.9 cd/lmLEDs/each optic1Light colourWhiteRequired components:

C16058_XTM-ADAPTER-50-C








bridgelux

LED VERO13
FWHM / FWTM 15.0° / 30.0°
Efficiency 61 %
Peak intensity 5.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C16142_HEKLA-SOCKET-K




CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 14.0° / 24.0°
Efficiency 45 %
Peak intensity 7.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15859_HEKLA-SOCKET-I C16752_CARMEN-70-SHD



CITIZEN

 LED
 CLU700/701/702


 FWHM / FWTM
 9.0° / 16.0°

 Efficiency
 51 %

 Peak intensity
 17.5 cd/lm

LEDs/each optic 1
Light colour White

Required components: F15255_HEKLA-SOCKET-C C16752_CARMEN-70-SHD




CITIZEN

LED CLU712 FWHM / FWTM 12.0° / 22.0°

Efficiency 64 %
Peak intensity 10.8 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I





CITIZEN

 LED
 CLU712

 FWHM / FWTM
 13.0° / 22.0°


 Efficiency
 47 %

 Peak intensity
 8.7 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15859_HEKLA-SOCKET-I C16752_CARMEN-70-SHD



CITIZEN

 LED
 CLU720/721


 FWHM / FWTM
 15.0° / 29.0°

 Efficiency
 61 %

 Peak intensity
 6.6 cd/lm

Peak intensity 6.6 cd
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I




CITIZEN

LED CLU7A2 (LES 4.2mm)

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C C16752_CARMEN-70-SHD




LUMILEDS

LED LUXEON CoB Compact

FWHM / FWTM 10.0° / 18.0°
Efficiency 71 %
Peak intensity 18 cd/lm
LEDs/each optic 1
Light colour White

F15848_HEKLA-SOCKET-G

Required components:





ELUMINUS

LED CXM-4

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 8.0° / 14.0°


Efficiency 52 %

Peak intensity 24.6 cd/lm

LEDs/each optic Light colour White

Required components: F17435_HEKLA-G2-C

C16752_CARMEN-70-SHD



ELUMINUS

LED CxM-6 (12x13)

FWHM / FWTM 10.0° / 18.0°

Efficiency 68 %


Peak intensity 18.5 cd/lm

LEDs/each optic 1

White Light colour

Required components:

F15255_HEKLA-SOCKET-C



ELUMINUS

LED CxM-6 (13.5x13.5)

FWHM / FWTM 10.0° / 18.0°


Efficiency 68 %

Peak intensity 18.5 cd/lm

LEDs/each optic 1 Light colour White

Required components:

F17435_HEKLA-G2-C



SAMSUNG

LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 13.0° / 24.0°


Efficiency 62 % Peak intensity 8.7 cd/lm

LEDs/each optic

White Light colour

Required components: F17435_HEKLA-G2-C








SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 14.0° / 24.0°
Efficiency 62 %
Peak intensity 8.5 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C




SAMSUNG

LED LC010C
FWHM / FWTM 10.0° / 18.0°
Efficiency 68 %
Peak intensity 18.6 cd/lm
LEDs/each optic 1

Light colour White

Required components: F17435_HEKLA-G2-C







PRODUCT DATASHEET CP15916_CARMEN-RS-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

17/17

www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W_CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER_CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B_CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE_FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W_FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P_FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN_LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W_CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN_CA1520_LISA2-W-PIN_CA