

799 SERIES 4-WAY CF8 FUSE HOLDER

58 Vdc • 500 A • 4-Position • Internally Bussed




Description

The 799 series is a compact high current multi-circuit fuse holder. It is ideal for primary branch fusing in locations close to the battery where space is at a premium. The holder's 4 positions are electrically connected with an internal bus bar. Applications include distributing fused or non-fused power circuits, as well as being used to distribute ground returns. It is designed for both rugged commercial vehicle, and light industrial applications.

Features and Benefits

- Accepts up to 300 A CF8 fuses with a total maximum current of 500 A
- Isolated studs allow for use of standard hardware as opposed to other products that require a plasticized nut to isolate fuse from bolt
- Input line can be brought in direct or through a master fuse for additional protection
- Conductive bus bar molded directly into unit for added rigidity and installation ease

Dimensions in millimeters

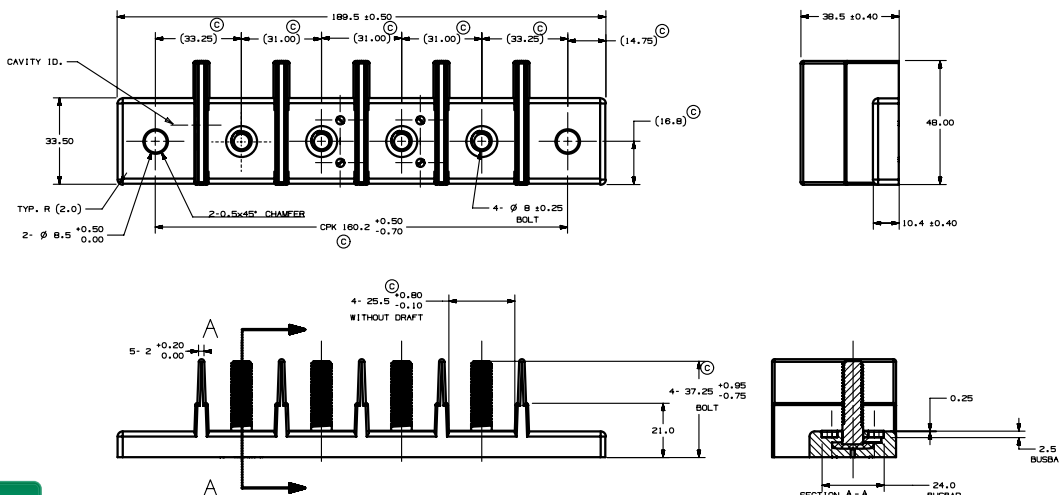

Specifications Overview

Max Voltage Rating:	58 Vdc
Max Current Rating:	500 A
Stud Size:	M8
Stud Torque:	25 Nm
Mounting Hardware:	M8 bolts and washers*
Mounting Torque:	25 Nm max
Temperature Range:	-40 to +125 °C
Dimensions:	189.5 x 48.0 x 38.5 mm

*Sold Separately

Recommended Fuses

- Littelfuse series: CF8; Competitor equivalent fuses



CF8 Fuse
Shown for Reference
Sold Separately

Web Resources

Download 2D outline and technical resources at:
littelfuse.com/

Ordering Information

PART NUMBER	PACK QUANTITY	DESCRIPTION
0799C001ZXS	48	Complete Assembly



Visit Littelfuse.com for the most up-to-date product information. Littelfuse reserves the right to make product changes, without notice. Material in this document is as accurate as known at the time of publication.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [020417G](#) [020418E](#) [6R30A1B](#) [F600A3B](#) [80910030](#) [8601.2020](#) [G15A2SPQ](#) [9-3557-GP REV A](#) [HDJ-B](#)
[R6J30A3S](#) [HFH-1](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [BK/FHN19G](#) [BK/HHM](#) [BK/HKP-CCHH](#) [BK/HKP-JJ](#) [BK/HTJ-LES-FUSE](#) [HMG-](#)
[241](#) [HTJ-LES-FUSE](#) [C4044-1](#) [2086-1](#) [2193](#) [2602](#) [2650](#) [178.000100](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [HKP-CCHH](#)
[R6F30A2S](#) [341001A](#) [345621A](#) [CVRMCC](#) [4202](#) [4407](#) [4408](#) [4413](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HC-5](#)