


|    |      |    |
|----|------|----|
| 版次 | 变更摘要 | 日期 |
| 0  |      |    |

| 序号 | 品名   | 材质                                       |
|----|--|--|
| ①  | A型卧式DIP型WTB胶芯<br>1.25 Pitch R/A Wire To<br>Board Housing DIP(H=3.2)  | PA66 UL94V-0 本色<br>Natural               |
| ②  | A型卧式DIP型WTB端子<br>1.25 Pitch R/A Wire To<br>Board Terminal DIP(H=3.2) | 铜合金/表面镀锡<br>Copper Alloy/<br>Tin Plating |

| CKT | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|
| 2   | 1.25  | 3.20  | 4.30  |
| 3   | 2.50  | 4.45  | 5.55  |
| 4   | 3.75  | 5.70  | 6.80  |
| 5   | 5.00  | 6.95  | 8.05  |
| 6   | 6.25  | 8.20  | 9.30  |
| 7   | 7.50  | 9.45  | 10.55 |
| 8   | 8.75  | 10.70 | 11.80 |
| 9   | 10.00 | 11.95 | 13.05 |
| 10  | 11.25 | 13.20 | 14.30 |
| 11  | 12.50 | 14.45 | 15.55 |
| 12  | 13.75 | 15.70 | 16.80 |
| 13  | 15.00 | 16.95 | 18.05 |
| 14  | 16.25 | 18.20 | 19.30 |
| 15  | 17.50 | 19.45 | 20.55 |
| 16  | 18.75 | 20.70 | 21.80 |
| 17  | 20.00 | 21.95 | 23.05 |
| 18  | 21.25 | 23.20 | 24.30 |
| 19  | 22.50 | 24.45 | 25.55 |
| 20  | 23.75 | 25.70 | 26.80 |

技术指标 (Technical Index):

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
- 锁扣窗口: 2~3PIN为1个, ≥4PIN为2个。  
(Lock Configuration: 2 to 3Pin is 1, ≥4Pin is 2)
- 温度范围 (Temperature range): -25° C ~ +85° C.
- 额定电压 (Rated voltage): 125V, AC/DC (=等效).
- 接触电阻 (Contact resistance): ≤0.02Ω.
- 绝缘电阻 (Insulation resistance): ≥100MΩ.
- 产品料号 (Product material No.):

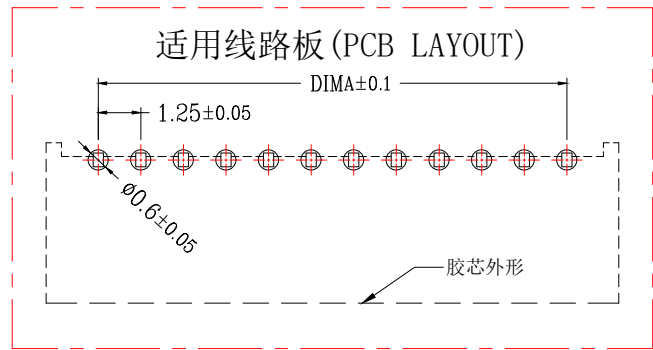

|                     |
|---------------------|
| 一般公差 (TOLERANCE)    |
| X: ±0.50 XX ±1.0    |
| .X ±0.20 .XXX ±0.05 |
| ANGLES ±1°          |

兆星精密电子 (深圳) 有限公司

|                         |            |
|-------------------------|------------|
| 品名 (TITLE)              | 制图 (DR)    |
| 单排MX1.25 n*Pin 弯针 红色/黄色 | 校对 (CHKD)  |
| 料号 (DWG.NO)             | 审核 (APPD)  |
| ZX-MX1.25-nPWZ-Y        |            |
| 比例 (SCALE)              | 张数 (SHEET) |
| 1:1                     | 1 OF 1     |
| 单位 (UNITS)              | SIZE       |
| mm                      | A4         |
|                         | REV        |
|                         | A          |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Megastar](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)