



DUAL-IN-LINE SOCKETS

SERIES 614...001 • CARRIER TYPE, LOW PROFILE • OPEN FRAME

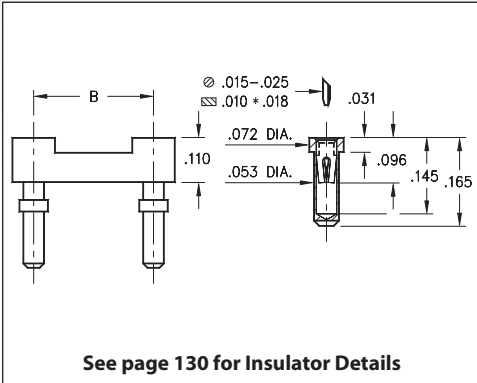

- Convenient way to load loose receptacles on a PC board
- Removable plastic carriers can be returned for reloading
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Series 614 uses MM #1401 pins. See page 170 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

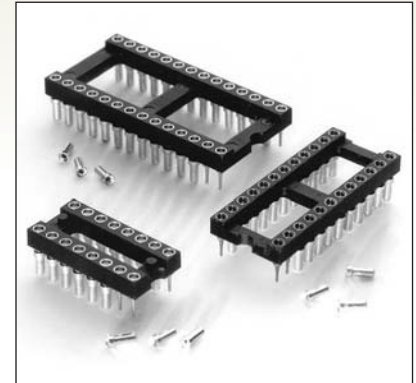

ORDERING INFORMATION

Total number of pins				Quantity per tube	Part Number
	A	B	C		
10	0.5	0.2	0.3	40	614-XX-210-41-001000
4	0.2	0.3	0.4	102	614-XX-304-41-001000
6	0.3	0.3	0.4	67	614-XX-306-41-001000
8	0.4	0.3	0.4	50	614-XX-308-41-001000
10	0.5	0.3	0.4	40	614-XX-310-41-001000
14	0.7	0.3	0.4	28	614-XX-314-41-001000
16	0.8	0.3	0.4	25	614-XX-316-41-001000
18	0.9	0.3	0.4	22	614-XX-318-41-001000
20	1.0	0.3	0.4	20	614-XX-320-41-001000
22	1.1	0.3	0.4	18	614-XX-322-41-001000
24	1.2	0.3	0.4	16	614-XX-324-41-001000
28	1.4	0.3	0.4	14	614-XX-328-41-001000
20	1.0	0.4	0.5	20	614-XX-420-41-001000
22	1.1	0.4	0.5	18	614-XX-422-41-001000
24	1.2	0.4	0.5	16	614-XX-424-41-001000
28	1.4	0.4	0.5	14	614-XX-428-41-001000
32	1.6	0.4	0.5	12	614-XX-432-41-001000
24	1.2	0.6	0.7	16	614-XX-624-41-001000
28	1.4	0.6	0.7	14	614-XX-628-41-001000
32	1.6	0.6	0.7	12	614-XX-632-41-001000
36	1.8	0.6	0.7	11	614-XX-636-41-001000
40	2.0	0.6	0.7	10	614-XX-640-41-001000
42	2.1	0.6	0.7	9	614-XX-642-41-001000
48	2.4	0.6	0.7	8	614-XX-648-41-001000
50	2.5	0.6	0.7	8	614-XX-650-41-001000
52	2.6	0.6	0.7	7	614-XX-652-41-001000
50	2.5	0.9	1.0	8	614-XX-950-41-001000
52	2.6	0.9	1.0	7	614-XX-952-41-001000
64	3.2	0.9	1.0	6	614-XX-964-41-001000

XX=Plating Code
See Below



SPECIFY PLATING CODE XX =	91	93	41	43
Sleeve (Pin)	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn
Contact (Clip)	10 μ" Au	30 μ" Au	10 μ" Au	30 μ" Au



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IC & Component Sockets](#) category:

Click to view products by [Mill-Max](#) manufacturer:

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [123-87-320-41-001101](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [APO-320-G-T](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#)