



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE30065 thru NTE30071 Super Bright LED Indicators, 10mm

Features:

- RoHS Compliant
- All Plastic Mold Type w/Water Clear Lens:
 - NTE30065 (Yellow Green, AlInGaP/GaAs)
 - NTE30066 (Light Green, InGaN/GaN)
 - NTE30067 (Orange, AlInGaP/GaAs)
 - NTE30068 (Light Red, AlInGaP/GaAs)
 - NTE30069 (Deep Red, GaAlAs/GaAlAs)
 - NTE30070 (Blue, InGaN/GaN)
 - NTE30071 (Super White, GaInN/GaN)

Absolute Maximum Ratings: ($T_A = +25^{\circ}\text{C}$ unless otherwise specified)

Reverse Voltage, V_R		
NTE30066, NTE30070	4V
NTE30065, NTE30067, NTE30068, NTE30069, NTE30071	5V
Continuous Forward Current, I_F		
All Devices	25mA
NTE30066 Only	30mA
Peak Forward Current (1.10 Duty Cycle, 0.1ms Pulse Width), I_{FM}		
NTE30065, NTE30067, NTE30068, NTE30069	50mA
NTE30066, NTE30070, NTE30071	100mA
Electrostatic Discharge (HBM, NTE30071 Only), ESD	150V
Power Dissipation, P_D		
NTE30065, NTE30067, NTE30068	100mW
NTE30069	110mW
NTE30066, NTE30070	120mW
NTE30071	80mW
LED Junction Temperature, T_j	+100°C
Operating Temperature Range, T_{opr}		
All Devices	-25°C to +85°C
NTE30071 Only	-20°C to +80°C
Storage Temperature Range, T_{stg}		
NTE30067 Only	-25°C to +100°C
NTE30071 Only	-30°C to +100°C
All Other Devices	-40°C to +100°C
Lead Temperature (During Soldering, .063 (1.6mm) from body, 5sec max), T_L	+260°C

Electro-Optical Characteristics: ($T_A = +25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F = 20\text{mA}$				
NTE30065			-	2.2	2.5	V
NTE30066, NTE30070			-	3.5	4.0	V
NTE30067, NTE30068			-	2.0	2.5	V
NTE30069			-	1.86	2.5	V
NTE30071			3.0	3.3	3.6	V



Rev 11-20



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Current All Devices	I_R	$V_R = 5V$	-	-	10	μA
NTE30066, NTE30070		$V_R = 4V$	-	-	60	μA
Luminous Intensity NTE30065	I_V	$I_F = 20mA$, Note 1	600	1300	-	mcd
NTE30066			1800	3500	-	mcd
NTE30067			1200	2000	-	mcd
NTE30068			1400	2000	-	mcd
NTE30069			1500	3000	-	mcd
NTE30070			600	1200	-	mcd
NTE30071			10000	-	12000	mcd
Peak Emission Wave Length NTE30065	λ_P	$I_F = 20mA$	-	575	-	nm
NTE30066			-	523	-	nm
NTE30067			-	592	-	nm
NTE30068			-	620	-	nm
NTE30069			-	660	-	nm
NTE30070			-	468	-	nm
NTE30071			CIE Coordinates, Typ		X: 0.30; Y: 0.30	
Dominate Wave Length NTE30065	λ_d (HUE)	$I_F = 20mA$, Note 2	-	572	-	nm
NTE30066			520	525	540	nm
NTE30067			-	590	-	nm
NTE30068			-	615	-	nm
NTE30069			-	645	-	nm
NTE30070			463	470	479	nm
Correlative Color Temp (NTE30071 Only)	T_C	$I_F = 20mA$	7000	-	9000	K
Spectral Line Half Width NTE30065	$\Delta\lambda$	$I_F = 20mA$	-	15	-	nm
NTE30066			-	45	-	nm
NTE30067, NTE30068			-	25	-	nm
NTE30069			-	20	-	nm
NTE30070			-	35	-	nm
Viewing Angle All Devices	$2\theta^{1/2}$	$I_F = 20mA$	-	40	-	deg.
NTE30071			-	30	-	deg.
Terminal Capacitance NTE30065	C_t	$V = 0V$, $f = 1MHz$	-	35	-	pF
NTE30067			-	14	-	pF
NTE30068			-	20	-	pF
NTE30069			-	22	-	pF
Response Frequency NTE30065, NTE30067, NTE30068, NTE30069	F_C		-	4	-	MHz
Optic Rise Time (NTE30066 Only)	τ	$I_F = 20mA$	-	30	-	ns

Note 1. Luminous intensity is measured with an Exeltron 2001.

Note 2. The dominate wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.

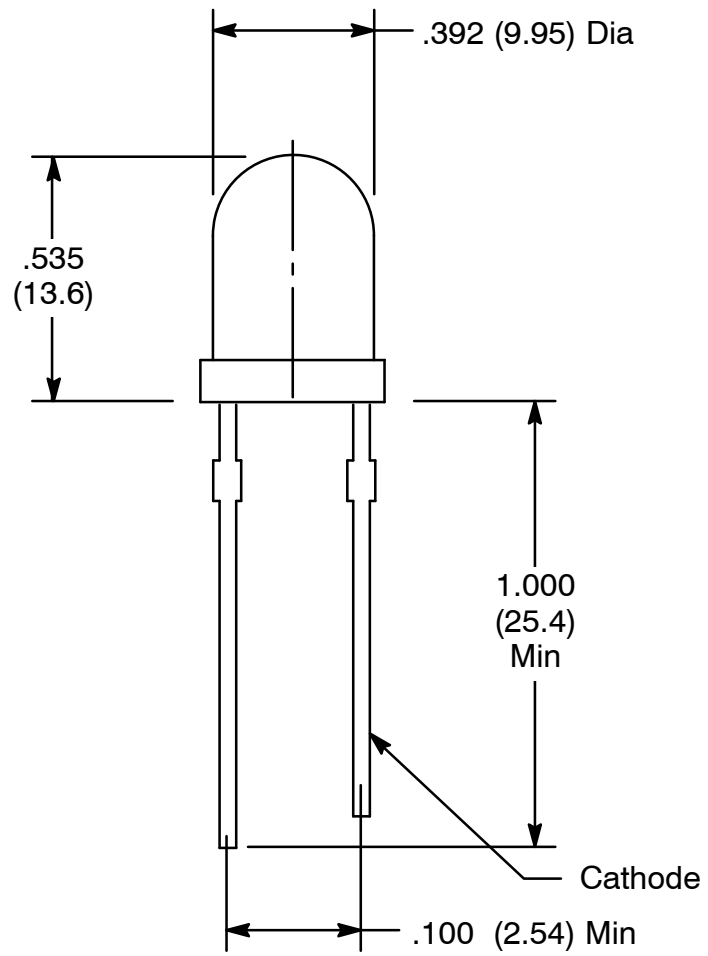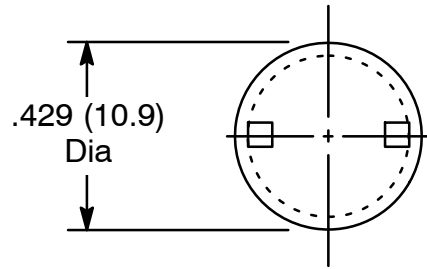

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard LEDs - Through Hole category](#):

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[LTL-10234W](#) [LTL-10254W](#) [LTL-1214A](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-433P](#) [LTL-5234](#) [LTL87HTBK](#) [LTW-87HD4B](#)
[HLMP-3507-D00B1](#) [HLMP-EL30-PS0DD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [NTE30036](#) [NTE30044](#) [NTE30059](#) [NTE3020](#) [LD CQDP-](#)
[1U3U-W5-1-K](#) [LO566UHR3-70G-A3](#) [LP379PPG1C0G0300001](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSS-](#)
[LX4673ID-410B](#) [1L0532Y24I0TD001](#) [264-7SYGD/S530-E2](#) [HLMP1385](#) [LTL-10224W](#) [LTL-1224A](#) [LTL-1234A](#) [LTL-1BEHJ-012](#) [LTL-](#)
[2251AT](#) [LTL-307YE-012](#) [LTL-403HR](#) [LTL-4222](#) [LU7-E-B](#) [4380H1](#) [TLHY44K1L2](#) [HLMP-3962-F0002](#) [HLMP-GG15-R0000](#) [323-](#)
[2SURD/S530-A3](#) [L53SRC/E-Z](#) [L-7679C1ZGC](#) [4302T1-5V](#) [4306D23](#) [4363D1/5](#) [WP1503SRC/J4](#) [WP153GDT](#)