3-Prong Miniature ConnectorsFor Thermocouples, RTD's and 3-Wire Thermistors

MTP Series

- Supplied with Shielded Wire **Copper Connection Pin**
- Heavy Duty Construction
- Color-Coded
- Accepts Stranded or Solid Wire up to Size 20 AWG
- ✓ Combination Phillips/ Slot Screws
- ✓ Glass-Filled Nylon Rated from -29 to 180°C (-20 to 356°F)






Miniature uncompensated version male and female shown actual size.

> Maximum wire diameter is 3 mm (0.125").

For OMEGA's **Selection of Connector Accessories** Visit Us Online

We make running changes when technical advances allow. Check at time of ordering for additional features.

Note: Minor discoloration of connector may occur between 150°C (302°F) and 180°C (356°F). Electrical properties are not affected.

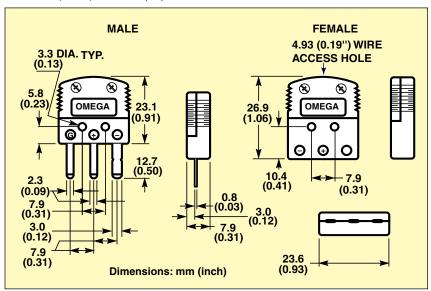

Discount Schedule	
1-10	Net
11-49	5%
50-99	10%
100-999	15%
1000-4999	20%
5000 and over	25%



To Order									
	Type of Thermocouple	Compensating Alloy Used in Connector			Model No. ANSI				
Alloy Code†	Used with Connector	+	-	G	Shell Color	Color Code			
K	CHROMEGA®-ALOMEGA®	CHROMEGA	ALOMEGA	Copper	Yellow	MTP-K-(*)			
T	Copper-Constantan	Copper	Constantan	Copper	Blue	MTP-T-(*)			
J	Iron-Constantan	Iron	Constantan	Copper	Black	MTP-J-(*)			
E	CHROMEGA-Constantan	CHROMEGA	Constantan	Copper	Purple	MTP-E-(*)			
U	Uncompensated	Copper	Copper	Copper	White	MTP-U-(*)			
N	OMEGALLOY®	OMEGA-P®	OMEGA-N®	Copper	Orange	MTP-N-(*)			

† K, T, J, E, R, S and B are ANSI designations.
*To order, specify "M" for male connector only, or "F" for female connector only.

OMEGALLOY Type N is generically known as Nicrosil-Nisil.

OMEGA's subminiature connectors are molded of high performance glass-filled nylon. Connectors will accommodate protection tubes from 0.25 mm to 3.17 mm (0.010" to 1/2") O.D. Additional bushings can be purchased for an additional cost; order BB-SMP-1.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below:

NHX-U-M PX309-2KG5V PX319-200GI 88007K 88309K ON-403-PP P-L-1/10-1/8-6-0-T-3 LC201-50 OTP-U-F W5W26-010-ROHS
HMPW-TI-M-ROHS M12-J-S-F-FM LCWD-20K RTD-850M OS137A-2-K-100FT PX3005-005AI LVU712-B CN616A STD-HL
OS36SM-APJ OS36SM-MR LCM302-200N OSTW-CC-K-M OSTW-J-F SMPW-E-M SMPW-U-M KHXL-18G-RSC-12 PX309-500G5V
PX319-015GI PX359-150GI PX409-015CGUSBH PX409-5.0KGUSBH SA1-RTD-4W-120 88221K-RE 88402K LVC-E51 RSC-K-1-4-4
TECK25-9 DP32PT-330 RTD-2-F3105-36-G LCKD-10 LC201-25 DP116-DC PX3005-005GI PX633-CLAMP PX633-M20 PX633-WEIGHT OM-CP-MICROTEMP OS100-MB SHX-J-F