
#### NICKEL METAL HYDRIDE BATTERIES: INDIVIDUAL DATA SHEET

## HHR120AA Cylindrical 4/5AA size (HR 15/43)

#### **Dimensions (with Tube)**

(mm)

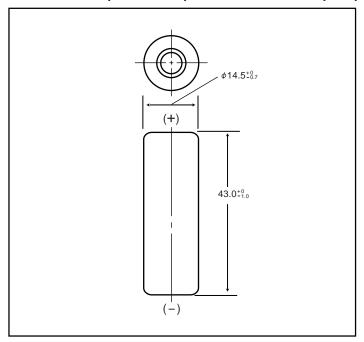

#### **Specifications**

	mm	inch
Diameter	14.5+0/-0.7	0.57+0/-0.03
Height	43.0+0/-1.0	1.69+0/-0.04
Approximate	Grams	Ounces
Weight	23	0.81

Nominal Voltage			1.2V	
Discharge Capacity*		Average**	1220 mAh	
		Rated (Min.)	1150 mAh	
Approx. Internal impedance at 1000Hz at charged state.		19mΩ		
Charge Standard Rapid		Standard	120mA (0.1lt) x 16hrs.	
		Rapid	1200mA (1lt) x 1.2 hrs.	
Ambient Temperature	Charge	Standard	°C	°F
			0°C to 45°C	32°F to 113°F
		Rapid	0°C to 40°C	32°F to 104°F
	Discharge		-10°C to 65°C	14°F to 149°F
	Storage	< 1 year	-20°C to 35°C	-4°F to 95°F
		< 3 months	-20°C to 45°C	-4°F to 113°F
		< 1 month	-20°C to 55°C	-4°F to 131°F

- \* After charging at 0.1lt for 16 hours, discharging at 0.2lt.
- \*\* For reference only.


Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge / discharge specs, warning label contents and unit design.

Note: [It] was previously expressed as [C]. [It] is an IEC standard expression for the amount of charge or discharge current and is expressed as: It(A) = Cn (Ah)/1h.


- [It] is the reference test current in ampres
- [Cn] is the rated capacity of the cell or battery in Ampere-hours.


  n = the time base [hours] for which the rated capacity is declared

#### **Typical Charge Characteristics**



### **Typical Discharge Characteristics**



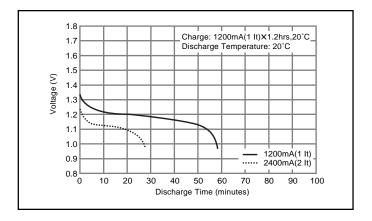

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NiMH - Nickel Metal Hydride Battery category:

Click to view products by Panasonic manufacturer:

Other Similar products are found below:

HR-4U HHR-75AAA/B HHR-210AHA01 BK-110FHB01 NH1250AA NH-3000SC HHR200SCP NH-2100A NH-600AAA NH-B320
HHR-26SCPY01 NH-1500AA NH-1250AAL NH-7000D BK-200AAB9B BK-250AB01 BK-80AAAB9B HHR-200AB20 HHR-210AB18
HHR-25SCHY03 HHR-300CHA03 HHR-30SCPY20 HHR-370AHA05 HHR-380A HHR-60AAAHB2 HHR-75AAAB5B