


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		REEL QTY.	COLOR (DIN)	MAX. WIRE INSUL. DIA.	WIRE CLASS	DIMENSIONS - in [mm]				CP-881 INSERTS	CA10 DIE SET
	AWG	[mm <sup>2</sup> ]					L	P	OD (REF.)	ID		
* FSD75-8-5K10	22-20	[0,50]	5000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]	WHITE INSERTS	CD10-1
* FSD75-8-3K10	22-20	[0,50]	3000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8]	.05 [1,4]	.04 [1,0]		
FSD76-8-5K8	18	[0,75]	5000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]	GRAY INSERTS	
FSD76-8-3K8	18	[0,75]	3000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8]	.06 [1,6]	.05 [1,2]		
FSD77-8-5K2	-	[1,0]	5000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]	RED INSERTS	CD10-2
FSD77-8-3K2	-	[1,0]	3000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8]	.07 [1,8]	.06 [1,4]		
FSD78-8-5K0	16	[1,5]	5000	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]	BLACK INSERTS	
FSD78-8-2KD0	16	[1,5]	2500	BLACK	.13 [3,3]	B, K, M	.57 [14,5]	.31 [8]	.08 [2,1]	.07 [1,7]		
FSD80-8-3K6	14	[2,5]	3000	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]	BLUE INSERTS	CD10-3
FSD80-8-KD6	14	[2,5]	1500	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8]	.10 [2,6]	.09 [2,2]		

\* UL LISTED WITH 20 AWG ONLY, UL486F SCOPE IS 20 - 1/0 AWG. WHITE IS DIN COLOR FOR 20 AWG [0,5]

NOTES:

- USED FOR:
  - UL LISTED WITH STRANDED COPPER WIRE ONLY
  - 221°F [105°C] MAX. OPERATING TEMPERATURE
- INSTALLATION TOOLS PANDUIT APPROVED:
  - CP-871 WITH CA10 APPLICATOR
  - CP-881
- WIRE STRIP LENGTH: 13/32" <sup>+1/32</sup> <sub>-0</sub> [10,0<sup>+0,8</sup> <sub>-0</sub>]
- MATERIAL:
  - STAMPING: COPPER, TIN PLATED
  - HOUSING: POLYPROPYLENE, COLOR CODED
  - COLOR CODE CONFORMS TO DIN STANDARD
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- FOR TOLERANCING REFER TO DIN 46228 PART 4

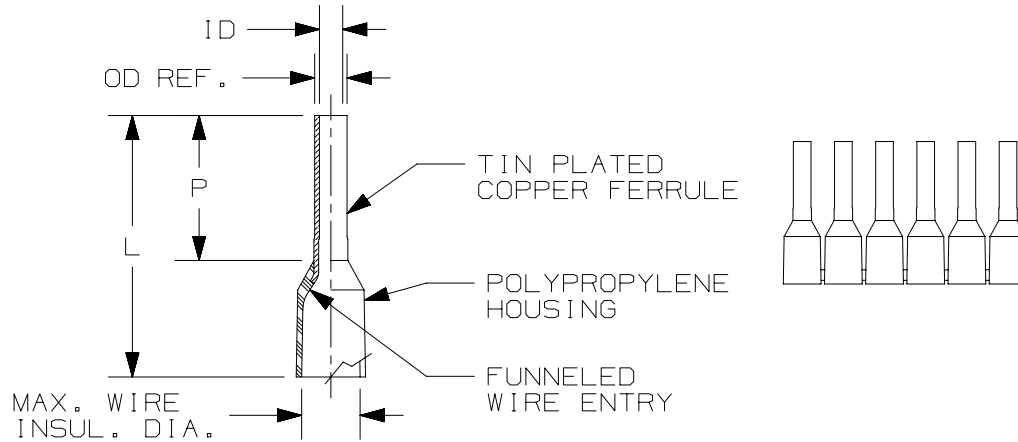

TITLE						
<b>FERRULES WITH SLEEVES ON CONTINUOUS REEL (DIN)</b>						
CUSTOMER DRAWING						
ITEM REVISION NAME					N41737BA/09	
DATASET FILE NAME					N41737BA_DC/09	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL:	
.X ±					.XXX ±	
.XX ±					ANGLES ±	
					THIRD ANGLE PROJECTION	
DRAWN BY					DATE	SCALE
DAW					1/07	LCA N.T.S.
DRAWING NUMBER:					A41737	
REV					DATE	BY
DESCRIPTION					ECN	SIZE
SHT 1 OF 1					A	

11/10/00DA/16

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#) [751-250](#) [76650-5002](#) [76828-149](#)