



ProLED-MINI-2W-CC070

Professional Led Modules; **3-16cm** 3D letters, lightboxes



■ Features:

- luminous efficacy 140 lm/W
- for indoor and outdoor use
- 50 pcs in chain



UK
CA

CE

TECHNICAL DETAILS



MODEL	ProLED-MINI-2W-CC070
Supply voltage	12V DC
Power consumption per module	0.5W
Chain power consumption	25W
Current consumption per module	42mA
LED diodes	LumiLEDs - 2835
Quantity of LEDs	2
Light color	White (~7000K)
Luminous flux	70lm (W)
Luminous flux density	140lm (W)
Color rendering index - CRI	≥80
Beam angle	140°
Current stabilization	Yes
Dimming	Yes
Module dimensions (L x W x H)	26 x 8 x 8mm
Cable length	44mm
Number of modules in 1m	14.3
Box weight	17kg
Packing	Chain – 50pcs / Bag – 200pcs / Box – 5000pcs
Montage	Adhesive tape / mounting screw
Lifetime	L70B50 > 50000h
Working temperature	-25°C ÷ 55°C
IP protection	IP67
Warranty	7 years




ProLED-MINI-2W-CC070

Professional Led Modules; **3-16cm** 3D letters, lightboxes



Dimensions

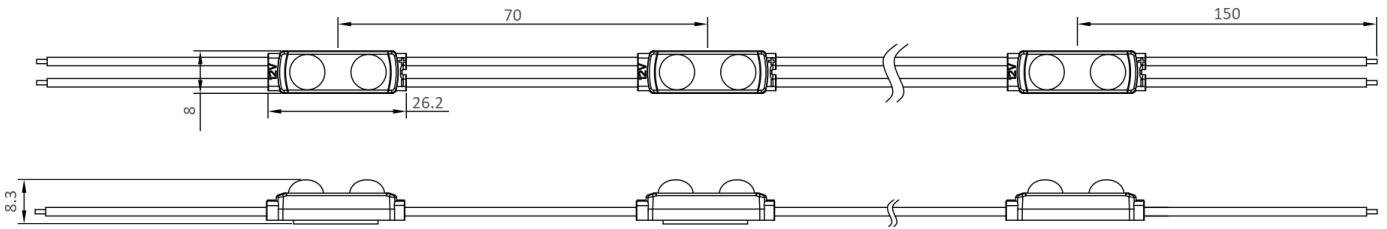

Connection diagram

One-side power input:



Two-side power input:




Maximum number of modules 50 pcs

Maximum number of modules 100 pcs


It is acceptable to connect multiple chains in parallel, as long as the power supply provides sufficient power

Light color / CCT

Light color

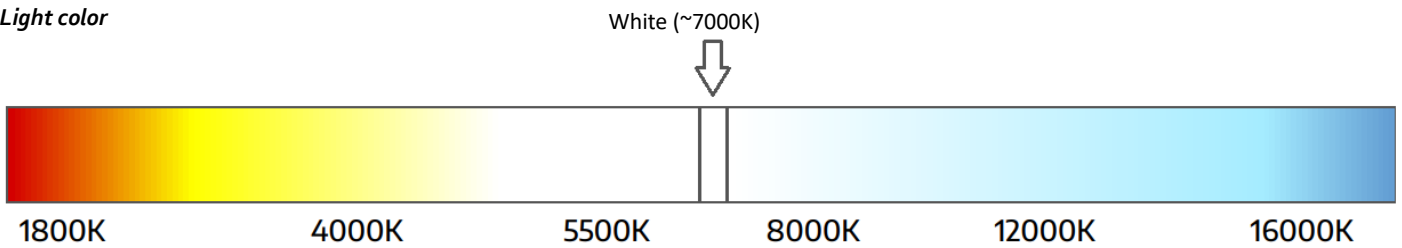


Packing



Chain
50 pcs



Bag
200 pcs



Box
5000 pcs




ProLED-MINI-2W-CC070



Professional Led Modules; **3-16cm** 3D letters, lightboxes

Beam angle

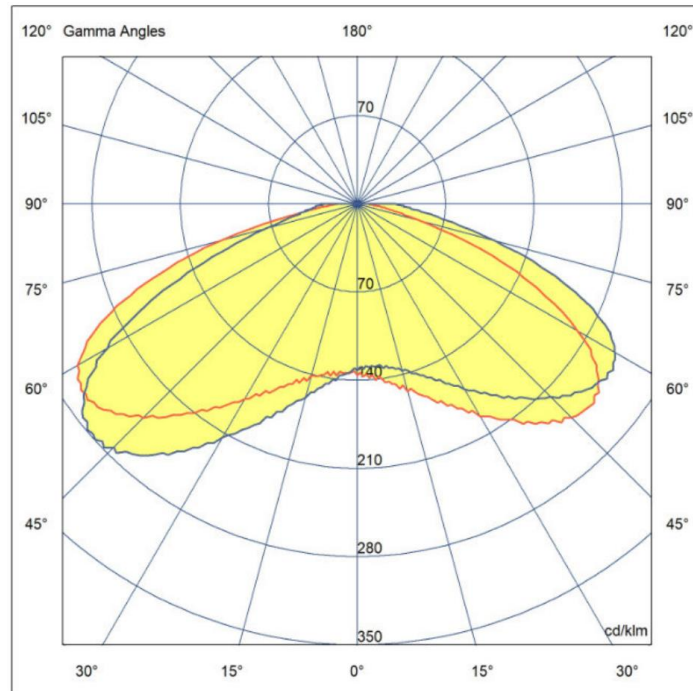

Energy label

ENERG

MW LIGHTING
ProLED-MINI-2W-CC070 v.2

A
B
C
D
E
F
G

E

1
kWh/1000h

2019/2015

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Bars and Arrays](#) category:

Click to view products by [POS manufacturer](#):

Other Similar products are found below :

[LTL-2755Y](#) [LF2B-D3P-BTHWW2-1M](#) [SSA-LXB10GW-18751](#) [SSA-LXB10YW](#) [SSA-LXH1025I1G7XXD](#) [HLMP2300](#) [LTL-2450Y](#) [LTL-2855G](#) [HLMP2655](#) [SSB-LX2301SIW](#) [TOS-4102BR-N](#) [SSA-LXB10-IYG8W-1](#) [LTL-57173HR](#) * [LPB-R0112051S](#) [SSA-LXB525-I1G3I1D](#) [MW-MLD-2835-3W-LENS V,2](#) [MW-MLD-2835-1W-LENS](#) [OSWSW51006B-5V](#) [PROLED-MINI-3W-CC100](#) [MW-MLD-2835-3B-LENS](#) [OSWM43-K4W](#) [PROLED-MINI-2W-CC70](#) [OSWM43-G5W](#) [MW-MLD-2835-2W-LENS V,2](#) [OSWSM51006B-5V](#) [OST1MC5A31A-W1V](#) [WL 30 W](#) [PROLED-3W-CC220](#) [MW-MLD-HE-3W-LENS170](#) [WL 20 W](#) [OSWM43-W5W](#) [57844](#) [113162000-00660681](#) [49983](#) [MW-MLD-HE-1WW-LENS170](#) [OSWM43-B6W](#) [MW-MLD-HE-2W-LENS170](#) [OSWM43-B5W](#) [OSWM43-Y5W](#) [MINIOVAL-1WW](#) [ALUSTAR-G2-NA-SC590-1A-54](#) [LTA-1000E](#) [LTL-57173HR](#) [1330.0001](#) [1330.0003](#) [1330.0009](#) [KB-2855SGW](#) [KB-B100SURKW](#) [L-1043GDT](#) [L-875/4SRDT](#)