ADP-SMAM-SMBF

RF Adaptor

SMA(male) to SMB(female)

Features		
Frequency Range	DC-3GHz	
Voltage Standing Wave Ratio	≤1.15	
Impedance	50Ω	
Temperature Range	-55~+155°C	
Centre Conductor Retention Range	≥0.28N	
Coupling nut Retention Force	≥180Nq	
Insertion Loss	≤0.1dB/3GHz	
Durability (mating)	>500 Cycles	
Insulation Resistance	≥5000MΩ	
Working Voltage	355Vrms	
Max Voltage (can withstand)	1000Vrms	



Material Information	
Body	Gold plated Brass
Pin/Socket contact	Gold plated Brass/beryllium- copper
Crimp ferrule	Nickel/gold plated Copper alloy
Insulator	PTFE

Ordering Information

Part Number	Description
ADP-SMAM-SMBF	Adaptor SMA(male) to SMB(female)







RF Adaptor



VSWR

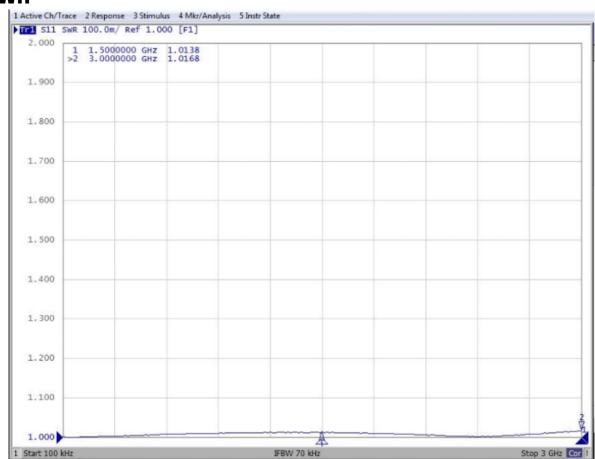

Insertion Loss

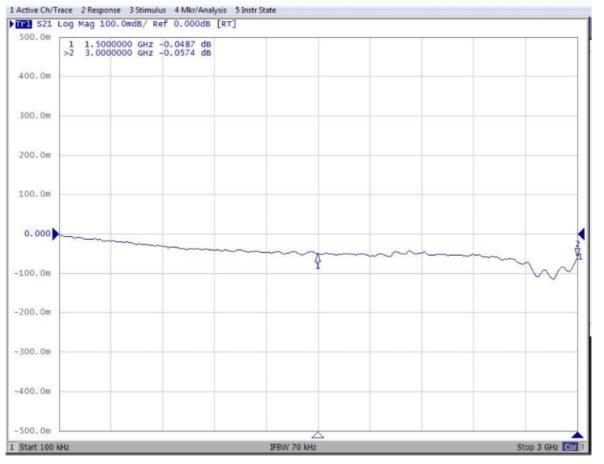


О

RF Adaptor



Mechanical Detail

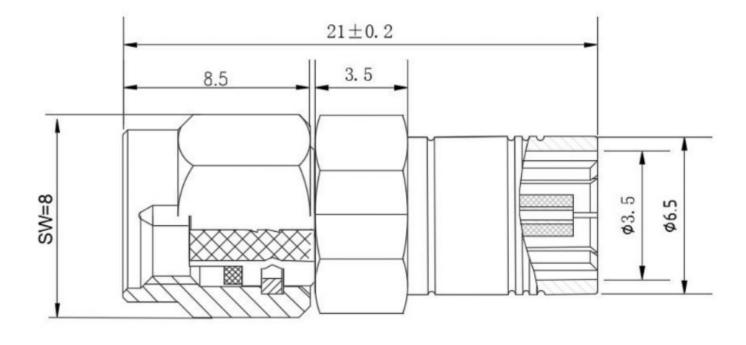

RF Solutions Ltd. Recycling Notice Meets the following EC Directives: DO NOT Discard with normal waste, please recycle. ROHS Directive 2011/65/EU Specifies certain limits for hazardous substances. WEEE Directive 2012/19/EU



Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfils its WEEE obligations by membership of an approved compliance scheme, environment agency registration number WEE/JB104WV.

Disclaimer

Disclaimer: Whils the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular require-ments or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use R F Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict QuasarUK Ltd's liability for death or personal injury resulting from its negligence.

6

ç

www.rfsolutions.co.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - Between Series category:

Click to view products by RF Solutions manufacturer:

Other Similar products are found below :

5945-9503-000 MCX/F-SMA/M R192417010 ADBJ20-E1-BJ379 ADM2 ADPL75-A1-PL75 242191 9317505 29-3835P AD130 ADBJ20-E1-PL74 ADBJ20-E2-BJ79 ADBJ77-A1-PL375 ADBJ77-E1-UPL20 ADRMF370 242215 242228 R125680000W R192430000 UAD95 1057367-1 8311505 R114704000 R451034500 R451030500 R451543000 HDVDPN ADBJ20-K1-PL20 R451570000 R451034000 J9 J3WE-5 R451032500 242201RP 17K132-K0085 AD-RSMAF-RTNC 53K156-K00N5 02K119-K00E3 29S132-K01N5 53S156-K00N5 02S119-S00E3 28K132-K00N5 02S109-K00S3 27-8200TP 242235 ADBJ20-E1-BJ89 000-2900 321-102-003 (SMA-50/2-H155/W1.03 AU) 1057377-1 321-350-001 (SMA-50-R/2-RG316/N2.01)