


FEATURES

- Wide range of available, fixed output voltage.
- Low cost.
- Internal short-circuit current limiting.
- Internal thermal overload protection.
- No external components required.

HF

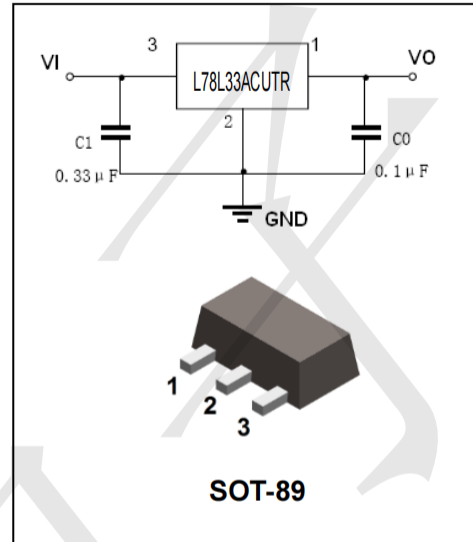

APPLICATIONS

- Three-terminal positive voltage regulator.

ORDERING INFORMATION

Type No.	Marking	Package Code	Shipping
L78L33ACUTR	78L33	SOT-89	1000 pcs / Tape & Reel

MAXIMUM RATING

operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input voltage	30	V
I_{CM}	Maximum output current	100	mA
$R_{\theta JA}$	Thermal Resistance Junction-to-Air	250	°C/W
P_D	Power dissipation ($T_A = 25^\circ\text{C}$)	500	mW
T_{OPR}	Operating Temperature Range	-40 ~ +125	°C
T_J	Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-65 ~ +150	°C

ELECTRICAL CHARACTERISTICS


($V_{IN}=8.3V, I_O=40mA, 0^\circ C < T_J < 125^\circ C, C_I=0.33\mu F, C_O=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	L78L33ACUTR			UNIT
			MIN	TYP	MAX	
Output voltage	V_O	$T_J=25^\circ C$	3.168	3.3	3.432	V
		$5.8V \leq V_i \leq 20V, I_O=1mA-40mA$	3.135	-	3.465	
		$V_i=8.3V, I_O=1mA-70mA$	3.135	-	3.465	
Load regulation	Reg_{load}	$T_J=25^\circ C, I_O=1mA-100mA$	-	-	60	mV
		$T_J=25^\circ C, I_O=1mA-40mA$	-	-	30	
Line regulation	Reg_{line}	$5.8V \leq V_i \leq 20V, T_J=25^\circ C$	-	-	150	mV
		$6.3V \leq V_i \leq 20V, T_J=25^\circ C$	-	-	100	
Input Bias Current	I_{IB}	$T_J=25^\circ C$	-	-	6.0	mA
		$T_J=125^\circ C$	-	-	5.5	
Input Bias Current Change	ΔI_{IB}	$6.3V \leq V_i \leq 20V$	-	-	1.5	mA
		$1mA \leq I_O \leq 40mA$	-	-	0.1	
Output noise voltage	V_N	$10Hz \leq f \leq 100KHz$	-	40	-	μV
Ripple rejection	RR	$I_O=40mA, 6.3V \leq V_i \leq 16.3V$ $f=120Hz, T_J=25^\circ C$	41	49	-	dB
Dropout voltage	V_i-V_O	$T_J=25^\circ C$	-	2.5	-	V


PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

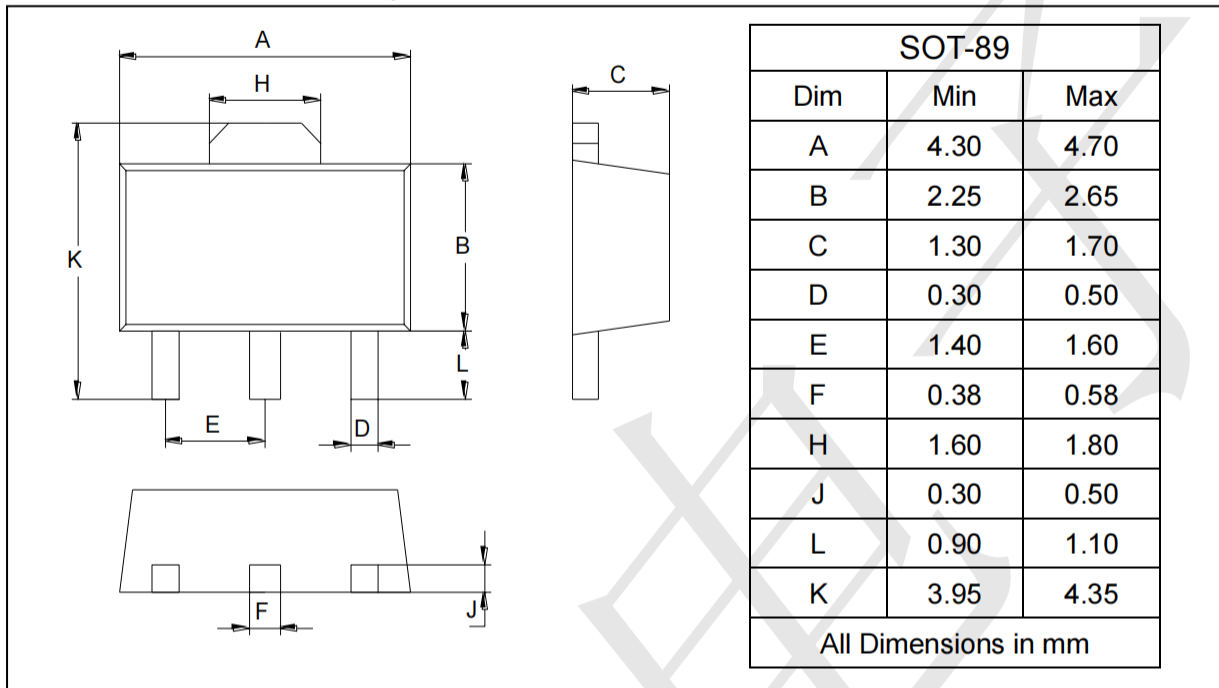

SOLDERING FOOTPRINT

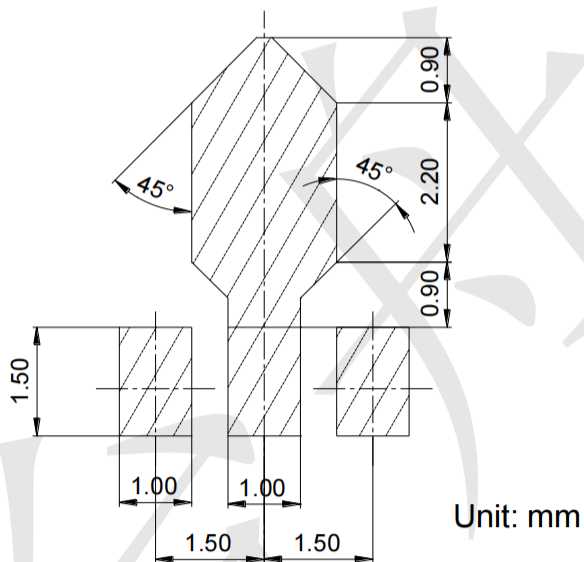

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA](#) [V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [WL9005D4-33](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [L78L33ACUTR](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#)